



CHAPTER 4: FACILITY REQUIREMENTS

Introduction

This chapter of the Airport Master Plan analyzes the existing and anticipated future facility needs at the Grand Forks International Airport (GFK). The report is divided into sections that assess the needs of primary airport elements including airfield, commercial passenger terminal, general aviation, air cargo, support, and landside facilities.

Airside requirements are those necessary for the operation of aircraft. Landside requirements are those necessary to support airport, aircraft and passenger operations. Proposed airport needs are based on a review of existing conditions, capacity levels, activity demand forecasts and airport design standards using FAA guidance and industry standards. This chapter identifies existing facility deficiencies along with facility needs to meet demand through the planning period. The level of review completed is sufficient to identify major elements that should be addressed in this comprehensive airport plan.

This chapter provides a review of the facility needs for the following airport infrastructure categories:

- [Airside Facilities](#)
- [Passenger Terminal](#)
- [Air Cargo](#)
- [General Aviation](#)
- [Support Facilities](#)
- [Landside Facilities](#)

Specific alternatives that propose solutions to address facility needs are evaluated in **Chapter 5: Alternatives Analysis**.

Background

GFK has completed significant airport improvements to address facility needs since the last master plan study was completed in 2008 including the construction of fourth runway (Runway 9R-27L), construction of a new air carrier terminal building, as well as construction of a new Snow Removal Equipment (SRE) building and Aircraft Rescue and Fire Fighting (ARFF) building. The construction of an east-side general aviation development area began in 2016.

Through coordination with the airport sponsor/airport stakeholders in conjunction with a forecast showing growth, there are key areas in the facility requirements chapter that require emphasis in the future development plans of GFK. These include:

- Runway/Airfield Capacity
- Passenger Terminal Building Space Requirements
- General Aviation Hangar Needs
- Automobile Parking Needs

This chapter will explain facility needs at GFK with recommendations based on specific activity-levels or time periods.

Planning Activity Levels (PALs)

There are various airport activity measures used to determine airport facility requirements including passenger enplanements, peak hour activity, annual operations, and based aircraft. Airport activity can be sensitive to industry changes, national and local economic conditions. This results in difficulty in identifying a specific calendar year for associated demand-driven improvements.

For this Master Plan study, PALs are used to identify demand thresholds for many recommended facility improvements. If an activity level is approaching a PAL, then the airport should prepare to implement



the improvements. Alternatively, activity levels that are not approaching a PAL can allow improvements to be deferred. The demand forecasts developed in this study correspond to an anticipated planning level calendar year to each PAL (2019, 2024, 2029, 2034) from the preferred aviation forecasts as seen in **Table 4-1**.


Table 4-1 – Planning Activity Levels (PALs)

Key Activity Metrics	Base	PAL 1	PAL 2	PAL 3	PAL 4
Forecast Year	2014	2019	2024	2029	2034
Annual Enplanements	146,531	147,612	170,763	194,170	220,787
Airline Operations	4,756	4,251	4,191	4,638	5,097
Enplaned/Deplaned Cargo (lbs.)	58,351,637	598,901	620,158	637,620	660,139
Based Aircraft	147	160	169	174	179

Source: KLJ Analysis

Exhibit 4-2 graphically depicts the PAL enplanement activity thresholds.

Exhibit 4-2 – Passenger Enplanement Planning Activity Levels (PALs)

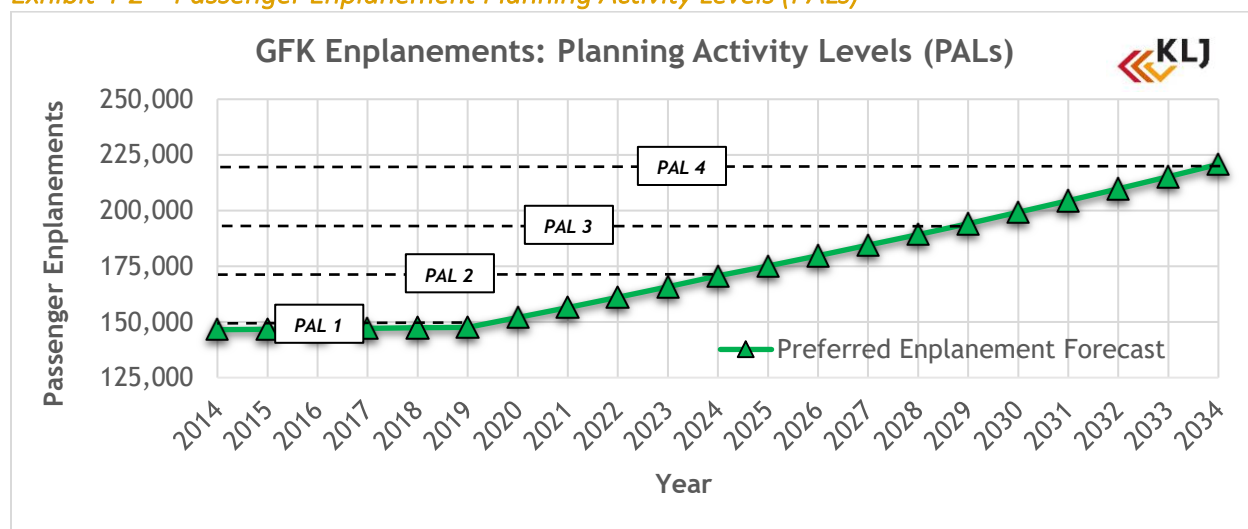

Source: KLJ Analysis

Table 4-3 graphically depicts the PAL activity thresholds for annual operations, including PAL 4 for unconstrained operations. **Exhibit 4-4** graphically depicts the PAL operations activity thresholds.


Table 4-3 – Operations Planning Activity Levels (PALs)

Key Activity Metrics	Base	PAL 1	PAL 2	PAL 3	PAL 4
Constrained Forecast Year	2014	2019	2024	2034	-
Unconstrained Forecast Year	2014	2019	2024	2028	2034
Total Aircraft Operations	324,196	334,205	347,330	357,874	383,247

Source: KLJ Analysis



Exhibit 4-4 – Airport Operations Planning Activity Levels (PALs)

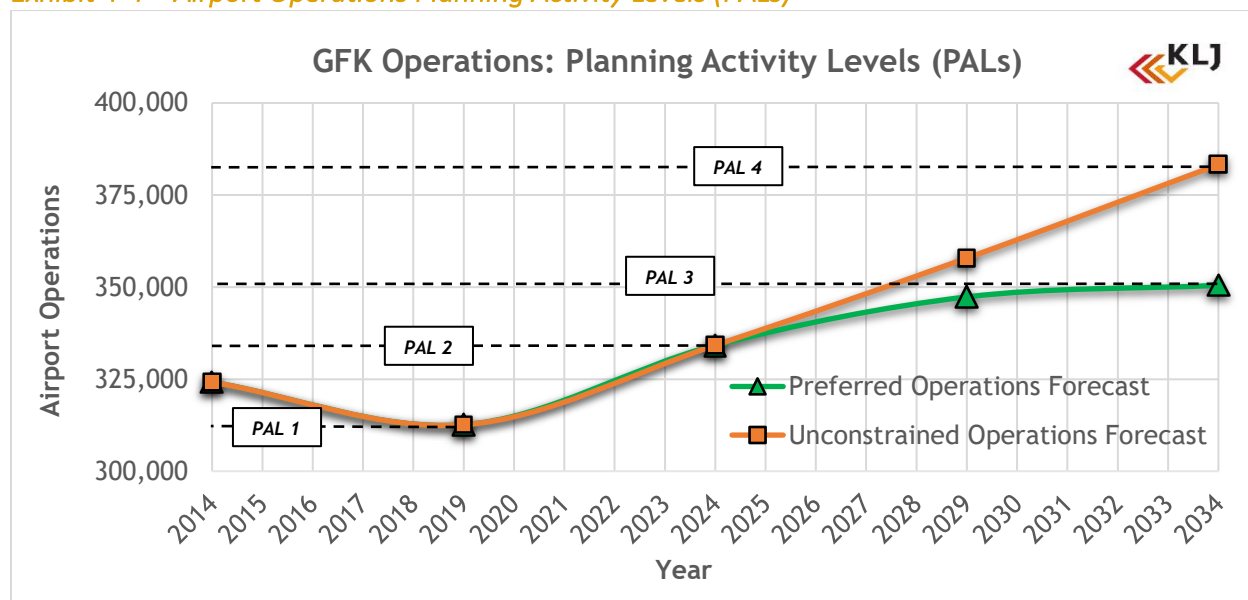

Source: KLJ Analysis

Airside Facilities

Airfield Design Standards

Guidance on FAA airport design standards is found in [FAA AC 150/5300-13A, Airport Design \(Change 1\)](#). Airport design standards provide basic guidelines for a safe, efficient, and economic airport system. Careful selection of basic aircraft characteristics for which the airport will be designed is important. Airport designs based only on existing aircraft can severely limit the ability to expand the airport to meet future requirements for larger, more demanding aircraft. Airport designs that are based on large aircraft unlikely to operate at the airport are not economical.

CRITICAL DESIGN AIRCRAFT

Aircraft characteristics relate directly to the design standards of an airport. Planning airport improvements requires the selection of one or more “critical design aircraft.” The critical design aircraft is the most demanding aircraft fleet operating or forecast to operate at the airport on a regular basis. FAA design standards for an airport are determined by a coding system that relates the physical and operational characteristics of the design aircraft to the airfield design geometry.

It is not the usual practice to base the airport design on an aircraft that uses the airport infrequently. Projects are eligible for FAA funding if they are needed for the critical design aircraft. The minimum threshold is 500 annual itinerant operations. See discussion further in this chapter regarding the critical design aircraft at GFK.

AIRFIELD DESIGN CLASSIFICATIONS

The FAA has established aircraft classification systems that group aircraft types based on their performance and geometric characteristics. These classification systems (see **Exhibit 4-5**) are used to determine the appropriate airport design standards for specific runway, taxiway, apron, or other facilities, as described in [FAA AC 150/5300-13A, Change 1](#).

- **Aircraft Approach Category (AAC):** a grouping of aircraft based on approach reference speed, typically 1.3 times the stall speed. Approach speed affects the dimensions and size of runway safety and object free areas.



- **Airplane Design Group (ADG):** a classification of aircraft based on wingspan and tail height. When the aircraft wingspan and tail height fall in different groups, the higher group is used. Wingspan affects the dimensions of taxiway and apron object free areas, as well as apron and parking configurations.
- **Taxiway Design Group (TDG):** a classification of airplanes based on outer to outer Main Gear Width (MGW) and Cockpit to Main Gear (CMG) distance. TDG affects taxiway/taxilane pavement width and fillet design at intersections.
- **Approach Visibility Minimums:** relates to the visibility minimums expressed by Runway Visual Range (RVR) values in feet. This is the minimum distance pilots must be able to see the runway to execute an approach to land. Visibility categories include visual (V), non-precision (NPA), approach procedure with vertical guidance (APV) and precision (PA). Lower visibility minimums require more complex airfield infrastructure and enhanced protection areas.

Although not a classification, runway length is driven by the landing and departure performance characteristics of the most demanding design aircraft as identified in [FAA AC 5325-4B, Runway Length Recommendations for Airport Design](#).

AIRPORT REFERENCE CODE (ARC)

The Airport Reference Code (ARC) is an airport designation that represents the AAC and ADG of the aircraft that the entire airfield is intended to accommodate on a regular basis. The ARC is used for planning and design only and does not limit the aircraft that may be able to operate safely on the airport.

RUNWAY DESIGN CODE (RDC)

RDC is a code signifying the design standards to which the overall runway is to be planned and built, typical based on the design aircraft and approach visibility minimums for a runway. RDC provides the information needed to determine the design standards that apply.

RUNWAY REFERENCE CODE (RRC)

RRC is a code signifying the current operational capabilities of each specific runway end and adjacent parallel taxiway. RRC is split into Approach Reference Code (APRC) and Departure Reference Codes (DPRC) for each phase of flight. APRC classifications are expressed in three components: AAC, ADG, and the lowest approach visibility minimums that either end of the runway is planned to provide. DPRC classifications utilize AAC and ADG components only. A runway end may have more than one RRC depending on the minimums available to a specific AAC.



Exhibit 4-5 – Airfield Classification Systems

Aircraft Approach Category (AAC)		
AAC	Approach Speed	
A	Approach speed less than 91 knots	
B	Approach speed 91 knots or more but less than 121 knots	
C	Approach speed 121 knots or more but less than 141 knots	
D	Approach speed 141 knots or more but less than 166 knots	
E	Approach speed 166 knots or more	
Airplane Design Group (ADG)		
ADG	Tail Height (ft.)	Wingspan (ft.)
I	< 20'	< 49'
II	20' - < 30'	49' - < 79'
III	30' - < 45'	79' - < 118'
IV	45' - < 60'	118' - < 171'
V	60' - < 66'	171' - < 214'
IV	66' - < 80'	214' - < 262'
Approach Visibility Minimums		
RVR (ft.)*	Instrument Flight Visibility Category (statue mile)	
N/A (VIS)	Visual (V)	
5000	Not lower than 1 mile (NPA)	
4000	Lower than 1 mile but not lower than ¾ mile (APV)	
2400	Lower than ¾ mile but not lower than ½ mile (CAT-I PA)	
1600	Lower than ½ mile but not lower than ¼ mile (CAT-II PA)	
1200	Lower than ¼ mile (CAT-III PA)	


Source: [FAA AC 150/5300-13A - Change 1, Airport Design](#); *RVR values are not exact equivalents

APV = Approach with Vertical Guidance, PA = Precision Approach

TAXIWAY DESIGN GROUP (TDG)

TDG relates to the dimensions of the aircraft landing gear including distance from cockpit to main gear (CMG) or wheelbase and main gear width (MGW). These dimensions relate to an aircraft's ability to safely maneuver taxiways at an airport. Taxiways/taxilanes on an airport can be construct to a different TDG based on the expected use of that taxiway/taxilane by the design aircraft. See **Exhibit 4-6** for TDG standards.

Exhibit 4-6 – Taxiway Design Group

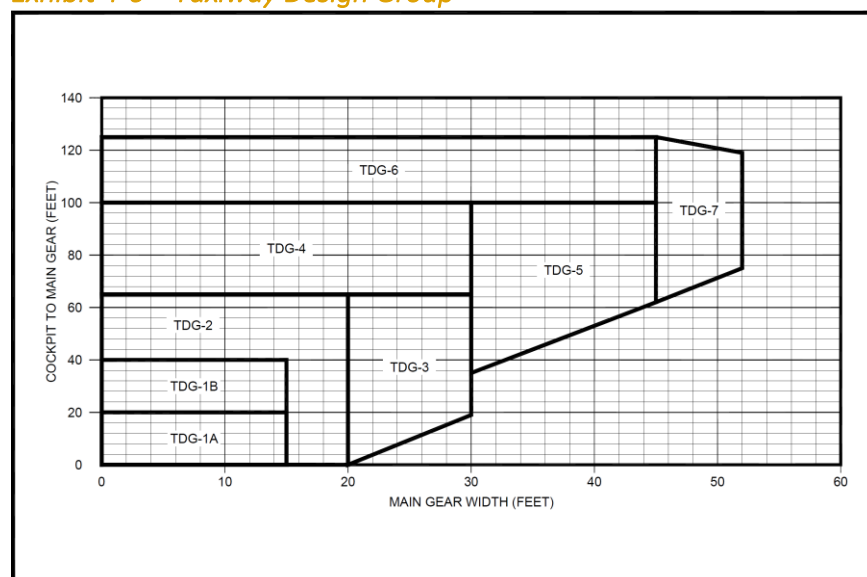

Source: [FAA AC 150/5300-13A - Change 1, Airport Design](#)



OTHER DESIGN CONSIDERATIONS

Other airport design principles are important to consider for a safe and efficient airport design:

- **Runway/Taxiway Configuration:** The configuration of runways and taxiways affects the airport's capacity/delay, risk of incursions with other aircraft on the runway and overall operational safety. Location of and type of taxiways connecting with runways correlates to runway occupancy time. The design of taxiway infrastructure should promote safety by minimizing confusing or complex geometry to reduce risk of an aircraft inadvertently entering the runway environment.
- **Approach and Departure Airspace & Land Use:** Runways each have imaginary surfaces that extend upward and outward from the runway end to protect normal flight operations. Runways also have land use standards beyond the runway end to protect the flying public as well as persons and property on the ground from potential operational hazards. Runways must meet grading and clearance standards considering natural and man-made obstacles that may obstruct these airspace surfaces. Surrounding land use should be compatible with airport operations. Airports should develop comprehensive land use controls to prevent new hazards outside the airport property line. Obstructions can limit the utility of a runway.
- **Meteorological Conditions:** An airport's runways should be designed so that aircraft land and takeoff into the prevailing wind. As wind conditions change, the addition of an additional runway may be needed to mitigate the effects of significant crosswind conditions that occur more than five percent of the year. Airports that experience lower cloud ceiling and/or visibility should also consider implementing an instrument procedures and related navigational aids to runways to maximize airport utility.
- **Controller Line of Sight:** The local Airport Traffic Control Tower (ATCT) relies on a clear line of sight from the controller cab to the airport's movement areas which includes the runways, taxiways, aprons, and arrival/departure corridors. Structures on an airport need to consider this design standard, and in some cases, require the completion of a shadow study to demonstrate no adverse impact.
- **Navigation Aids & Critical Areas:** Visual navigational aids (NAVAIDs) to a runway or the airfield require necessary clear areas for these NAVAIDs to be effective for pilots. Instrument NAVAIDs on an airport require sufficient clear areas for the NAVAID to properly function without interference to provide guidance to pilots. These NAVAID protection areas restrict development.
- **Airfield Line of Sight:** Runways need to meet grading standards so that objects and aircraft can be seen along the entire runway. A clear line of sight is also required for intersecting runways within the Runway Visibility Zone to allow pilots to maintain visual contact with other objects and/or aircraft that may pose a hazard.
- **Interface with Landside:** The airfield configuration should be designed to provide for the safe and efficient operation of aircraft as they transition from the airfield to landside facilities such as hangars and terminals.
- **Environmental Factors:** Airport development must consider potential impacts in and around the airport environs through the National Environmental Policy Act (NEPA). Additionally, development should also reduce the risk of potential wildlife hazards such as deer and birds that may cause hazards to flight operations.

Critical Design Aircraft

The critical design aircraft types must be identified to determine the appropriate airport design standards to incorporate into airport planning. The existing and future critical design aircraft characteristics at GFK are summarized in the following sections. **Exhibit 4-9** provides a breakdown of examples aircraft types and Airport Reference Code (ARC) characteristics.



OPERATIONAL BREAKDOWN

Passenger Airlines

Table 4-7 summarizes GFK scheduled passenger design aircraft operations. The design aircraft for scheduled & unscheduled passenger aircraft is currently an ARC D-III, TDG-4 airplane transitioning to an ARC C-III, TDG-3 airplane in the future. The heaviest aircraft to regularly use the airport will transition from a maximum aircraft weight of 166,000 pounds to 172,000 (dual wheel) pounds in the future.

Table 4-7 – Scheduled Passenger Design Aircraft Operations Breakdown

Representative Aircraft	Design	Base	PAL 1	PAL 2	PAL 3	PAL 4
Boeing MD-83 (Allegiant)	ARC D-III, TDG-4	456	416	286	0	0
CRJ-200 (Delta)	ARC D-II, TDG-3	3,526	1,716	624	0	0
Boeing 757-200 (Allegiant)	ARC C-IV, TDG-4	60	31	31	0	0
Airbus A319/A320 (Allegiant)	ARC C-III, TDG-3	326	416	858	1,196	1,248
Boeing 717-200 (Delta)	ARC C-III, TDG-3	0	10	10	10	530
CRJ-900 (Delta)	ARC C-III, TDG-3	320	1,664	2,392	3,432	3,328
Aircraft Approach Category	Total AAC D	3,982	2,132	910	0	0
	Total AAC C	706	2,122	3,292	4,638	5,106
Airplane Design Group	Total ADG-III	1,102	2,506	3,546	4,638	5,106
Taxiway Design Group	Total TDG-4	516	447	317	0	0
	Total TDG-3	4,172	3,806	3,884	4,638	5,106

Source: KLJ Analysis, FAA Traffic Flow Management System (2014)

Aircraft operations exceeding FAA regular use threshold are shown in **Green**

Design characteristics from FAA Advisory Circular 150/5300-13A

Calendar Year 2015 FAA Traffic Flow Management System (TFMSC) data confirms the existing passenger design aircraft fleet mix. The MD-83/88 airplane (ARC D-III) operated by Allegiant Airlines performed 502 annual operations alone. The CRJ-900 (ARC C-III) aircraft grew in operations with 1,102 annually compared to 2,746 in the smaller CRJ-200 (ARC D-II).

Air Cargo

In 2014, the air cargo design aircraft was an ARC C-IV, TDG-5 airplane. The heaviest mainline aircraft to regularly use the airport has maximum aircraft weight of 376,000 pounds (dual tandem wheel). Feeder aircraft to support mainline cargo operations have been ADG-II, TDG-2 aircraft up to 18,000 pounds (dual wheel).

At the end of 2016, mainline and feeder air cargo aircraft decreased dramatically as FedEx moved its air cargo base from GFK to Fargo. Feeder aircraft that continue to use GFK are associated with UPS feeder operations to/from their regional hub in Sioux Falls. Other occasional air cargo operations are expected. The air cargo design aircraft has changed to an ARC B-II, TDG-2 airplane such as the Swearingen Metroliner III with a maximum takeoff weight of 16,000 pounds (dual wheel).

Table 4-8 summarizes the air cargo design aircraft operations.

Table 4-8 – Air Cargo Design Aircraft Operations Breakdown











Representative Aircraft	Design	Base	PAL 1	PAL 2	PAL 3	PAL 4
Airbus A300 (FedEx)	ARC C-IV, TDG-5	396	0	0	0	0
Airbus A310 (FedEx)	ARC C-IV, TDG-5	236	0	0	0	0
Boeing 757-200 (FedEx)	ARC C-IV, TDG-4	324	10	10	10	10
Cessna 208 Caravan	ARC A-II, TDG 1A	6,503*	0	0	0	0
Swearingen Metroliner III	ARC B-II, TDG 2	572*	634	656	680	704
Aerospatiale ATR-42	ARC B-III, TDG-2	54*	0	0	0	0
Aerospatiale ATR-72	ARC B-III, TDG-3	32*	0	0	0	0
Beechcraft 1900D	ARC B-II, TDG-2	87*	51	53	54	56
Turbojet (FA20)	ARC B-II, TDG-2	135*	127	131	136	141

Source: KLJ Analysis, FAA Traffic Flow Management System (2014, 2015*)

Aircraft operations exceeding FAA regular use threshold are shown in **Green**



Exhibit 4-9 – Example ARC Aircraft

ARC A-I/Small Aircraft		ARC A-II/Small Aircraft	
Cessna 150 Cessna 182 Piper Archer Piper Seneca		Cessna 208 Pilatus PC-12 Aero Commander	
ARC B-I/Small Aircraft		ARC B-II/Small Aircraft	
Beech Baron 58 Cessna 421 Beech King Air 100		Beech King Air 90 Beech King Air 200	
ARC B-II		ARC B-III	
Beech King Air 350 Cessna Citation CJ2 Swearingen Metro III		ATR-42, ATR-72 Bombardier Q-400	
ARC C-I, C-II, D-II		ARC C-III, D-III	
CRJ-200/700 Cessna Citation X Embraer 145 Learjet 35		CRJ-900 Airbus A319/A320 Embraer 170/190 Boeing MD-83	
ARC C-IV, D-IV		ARC D-V, D-IV	
Airbus A300/A310 Boeing 757/767 C-130 Douglas DC-10		Boeing 747 Boeing 777 Airbus A340 Airbus A380	

Source: KLJ Analysis, Airliners.net



General Aviation

The general aviation design aircraft fleet mix is currently an ARC B-II, TDG-2 turbojet airplane. The heaviest aircraft to regularly use the airport is approximately up to 60,000 pounds maximum aircraft weight (dual wheel). A full breakdown is available in **Table 4-11**.

In the long-term the design aircraft AAC may see an increase from AAC-B to AAC-C. An increase from ADG-II to ADG-III is unlikely, but occasional operations including large charter aircraft do utilize this general aviation area. Airport operations should be monitored regularly using available FAA data.

Future general aviation development is planned on the east side of the airport for up to ADG-II, TDG-2 aircraft such as Beechcraft King Air B200 turboprop up to 12,500 pounds. This along with existing activity supports the future ARC B-II, small design aircraft for Runway 17L-35R also on the east side of the airfield.

University of North Dakota

University of North Dakota flight training operations currently utilize small single-engine and multi-engine aircraft with ARC A-I design. The aircraft fleet makeup was estimated to be 80 percent single-engine, 15 percent multi-engine and 5 percent helicopter. This fleet mix applied to the 2015 UND Total Operations is summarized below in **Table 4-10**. These aircraft are considered the critical design aircraft fleet for Runway 9R-27L.

Table 4-10 – UND Design Aircraft Operations Breakdown

Aircraft Type	2015 UND Operations	FAA AAC	FAA ADG	FAA TDG
Single-Engine Piston (80%)	218,225	A	I	1A
Multi-Engine Piston (15%)	40,917	A	I	1A
Helicopter (5%)	13,639	-	-	-
Total	272,782	A	I	1A

Source: KLJ Analysis, University of North Dakota



Table 4-11 – General Aviation Design Aircraft IFR Operations Breakdown

Aircraft Type	2015 IFR Operations	FAA AAC	FAA ADG	FAA TDG
Pilatus PC-12	1,116	A	II	-
Raytheon Premier I	76	B	I	-
Beechjet 400	49	B	I	-
Cessna Citation Mustang	20	B	I	2
Cessna Citation CJ2	32	B	II	2
Cessna Citation CJ3	24	B	II	2
Cessna Citation CJ4	124	B	II	1B
Cessna CitationJet	118	B	II	2
Beechcraft King Air 90	1,592	B	II	-
Beechcraft King Air 200	585	B	II	2
Beechcraft Super King Air 300/350	49	B	II	2
Cessna Citation II	92	B	II	2
Cessna Citation V	52	B	II	2
Cessna Citation XLS+	55	B	II	2
Cessna Citation III/VI/VII	12	B	II	1B
Cessna Citation Sovereign	24	B	II	1B
Bombardier Challenger 300	47	B	II	1B
Embraer Phenom 100/300	24	B	II	-
Dassault Falcon 2000	8	B	II	2
Dassault Falcon 900	2	B	II	2
Dassault Falcon 10	6	B	I	-
Dassault Falcon 20	109	B	II	1B
Dassault Falcon 50	8	B	II	2
Hawker 800	16	B	II	1B
Hawker 1000	2	B	II	1B
Learjet 35	28	C	I	-
Learjet 40	6	C	I	-
Learjet 45	40	C	I	1B
Learjet 55	4	C	I	-
Learjet 60	20	C	I	1B
Learjet 75	2	C	II	-
IAI Astra 1125	2	C	II	-
Gulfstream G200	8	C	II	1B
Gulfstream G400	2	C	II	2
Cessna Citation X	10	C	II	1B
Bombardier Challenger 600	26	C	II	-
Bombardier Global 5000	4	C	III	2
Gulfstream G500	2	C	III	2
Total AAC-B		3,126	-	-
Total AAC-C		154	-	-
Total ADG-II		-	4,141	-
Total ADG-III		-	6	-
Total TDG-2		-	-	1,053

Source: KLJ Analysis, FAA Traffic Flow Management System (2015)

Aircraft operations exceeding FAA regular use threshold are shown in **Green**

Note: Representative airplanes identified.



Overall

Air cargo operations drove the overall design airplane type at GFK in 2014 with an ARC D-IV with a TDG-5 classification. In 2017, as air cargo operations sharply declined at GFK, and the classification changed to ARC D-III, TDG-4, which is driven by Boeing 757, MD-80, and CRJ-200 passenger airline operations. In the future, the critical design airplane is expected to change to ARC C-III, TDG -3. The tabulation of forecast design aircraft operations is shown in Table 4-12.

Table 4-12 – Design Aircraft Operations

Metric	Base	PAL 1	PAL 2	PAL 3	PAL 4
Aircraft Approach Category (AAC)					
Aircraft Approach Category D	3,982	2,132	910	0	0
Aircraft Approach Category C	1,662	2,132	3,302	4,648	5,116
Airplane Design Group (ADG)					
Airplane Design Group IV	1,016	41	41	10	10
Airplane Design Group III	1,102	2,506	3,546	4,638	5,106
Taxiway Design Group (TDG)					
Taxiway Design Group 5	632	0	0	0	0
Taxiway Design Group 4	840	457	327	10	10
Taxiway Design Group 3	4,172	3,806	3,884	4,638	5,106
Overall Design Aircraft					
AAC-ADG-TDG	D-IV-5	D-III-3	D-III-3	C-III-3	C-III-3

Source: KLJ Analysis. Green highlight depicts substantial use of the design aircraft category.

SUMMARY

The existing design airplane characteristics for each air carrier runway is described in Table 4-13.

Table 4-13 – Existing Airfield Design Aircraft Fleet Mix Summary – Air Carrier

Design Characteristics	Runway 17R-35L	Runway 9L-27R
Planning Period	Existing	Existing
Representative Aircraft Make(s)/Model(s)	Airbus A-300F4-600R Boeing MD-83	Cessna Citation XLS+
Airplane Approach Category	D	B
Airplane Design Group	IV	II
Taxiway Design Group	5	2
Wingspan	147.1 feet	56.3 feet
Length	177.0 feet	52.5 feet
Tail Height	55.0 feet	17.2 feet
Cockpit to Main Gear	75.0 feet	18.6 feet
Main Gear Width	35.7 feet	15.5 feet
Approach Speed (1.3 x Stall)	144 knots	117 knots
Maximum Takeoff Weight	363,763 lbs.	20,200 lbs.
Landing Gear Configuration	Dual Tandem (DTW)	Dual Wheel (DW)
Aircraft Classification Number	71	6

Source: Airbus, Boeing, Cessna, Piper, Transport Canada, [FAA AC 150/5300-13A](#), KLJ Analysis

The future design airplane will change from an AAC-D to AAC-C airplane. Other airfield safety and capacity factors may drive the secondary runway to accommodate ARC C-III, TDG-3 air carrier aircraft in the future. Table 4-14 summarizes the future design airplane characteristics for each air carrier runway.



Table 4-14 – Future Airfield Design Aircraft Fleet Mix Summary – Air Carrier Runways

Design Characteristics	Runway 17R-35L	Runway 9L-27R*
Planning Period	Future	Future
Representative Aircraft Make(s)/Model(s)	Airbus A320-200 Bombardier CRJ-900LR	Airbus A320-200 Bombardier CRJ-900LR
Airplane Approach Category	C	C
Airplane Design Group	III	III
Taxiway Design Group	3	3
Wingspan	111.9 feet	111.9 feet
Length	123.3 feet	123.3 feet
Tail Height	39.6 feet	39.6 feet
Cockpit to Main Gear	55.7 feet	55.7 feet
Main Gear Width	29.4 feet	29.4 feet
Approach Speed (1.3 x Stall)	140 knots	140 knots
Maximum Takeoff Weight	171,961 lbs.	171,961 lbs.
Landing Gear Configuration	Dual Wheel (DW)	Dual Wheel (DW)
Aircraft Classification Number	51	51

Source: Airbus, Bombardier, Transport Canada, [FAA AC 150/5300-13A](#), KLJ Analysis

Blue highlight represents a change from existing configuration.

*Further discussion contained in this study to support air carrier use on crosswind runway
Design characteristics from FAA Advisory Circular 150/5300-13A

For the non-air carrier runways, the existing and future design standards will remain the same for each of the two runways (see **Table 4-15**). Runway 17L-35R should be designed for small general aviation based aircraft up to a Beechcraft King Air B200. This is supported by ADG-II general aviation infrastructure being constructed on the east side of the terminal area. Runway 9R-27L will continue to be designed for small general aviation flight training aircraft.

Table 4-15 – Airfield Design Aircraft Fleet Mix Summary – Non-Air Carrier Runways

Design Characteristics	Runway 17L-35R	Runway 9R-27L
Planning Period	Existing/Future	Existing/Future
Representative Aircraft Make(s)/Model(s)	Beechcraft King Air B200	Piper Seminole
Airplane Approach Category	B	A
Airplane Design Group	II (Small)	I (Small)
Taxiway Design Group	2	1A
Wingspan	54.5 feet	38.9 feet
Length	43.9 feet	28.5 feet
Tail Height	14.8 feet	8.5 feet
Cockpit to Main Gear	8.4 feet	2.6 feet
Main Gear Width	18.6 feet	11.6 feet
Approach Speed (1.3 x Stall)	98 knots	72 knots
Maximum Takeoff Weight	12,500 lbs.	3,800 lbs.
Landing Gear Configuration	Single (SW)	Single (SW)
Aircraft Classification Number	4	N/A

Source: Airbus, Boeing, Cessna, Piper, Transport Canada, [FAA AC 150/5300-13A](#), KLJ Analysis



Meteorological Considerations

Meteorological conditions that affect the facility requirements of an airport include but are not limited to wind direction, wind speed, cloud ceiling, visibility, and temperature. Hourly meteorological data was reviewed data from the GFK Automated Surface Observation System (ASOS) facility available from the National Climatic Data Center (NCDC). Periodic “special” weather observations within each hour were removed. This method provides considers the average weather trends at an airport without skewing conditions where multiple observations may be taken each hour due to changing conditions.

Wind coverage and weather conditions are evaluated based on the two different flight rules, VFR and IFR. Visual Meteorological Conditions (VMC) are encountered when the visibility is 3 nautical miles or greater, and the cloud ceiling height is 1,000 feet or greater. Conditions less than these weather minimums are considered Instrument Meteorological Conditions (IMC) requiring all flights to be operated under IFR.

WIND COVERAGE

Wind coverage is important to airfield configuration and utilization. Aircraft ideally takeoff and land into a headwind aligned with the runway orientation. Aircraft are designed and pilots are trained to land aircraft during limited crosswind conditions. Small, light aircraft are most affected by crosswinds. To mitigate the effect of crosswinds, FAA recommends runways be aligned so that excessive crosswind conditions are encountered at most 5 percent of the time. This is known as a “95 percent wind coverage” standard. Each aircraft’s ADG-ADG combination corresponds to a maximum crosswind wind speed component. Regular use is required to justify FAA funding for crosswind runways.



*Small Aircraft Crosswind Landing Diagram
(faasafety.gov)*

Even when the 95 percent wind coverage standard is achieved for the design airplane or airplane design group, cases arise where certain airplanes with lower crosswind capabilities are unable to utilize the primary runway. The maximum crosswind component for different aircraft sizes and speeds are shown in **Table 4-16**.

Table 4-16 – FAA Wind Coverage Standards

AAC-ADG	Maximum Crosswind Component	Applicable Runway(s)
A-I & B-I	10.5 knots	Runway 9R-27L
A-II & B-II	13.0 knots	Runway 9L-27R (Existing) Runway 17L-35R
A-III, B-III, C-I through D-III	16.0 knots	Runway 17R-35L (Future) Runway 9L-27R (Future)
A-IV through D-VI	20.0 knots	Runway 17R-35L (Existing)

Source: [FAA AC 150/5300-13A - Change 1, Airport Design](#)

Wind coverage for the airport is separated into all-weather, VMC and IMC alone. An all-weather analysis helps determine runway orientation and use. VMC is when most flight training operations occur. Local weather patterns commonly change in IMC. An IMC review helps determine the runway configuration for establishing instrument approaches.

Wind Analysis

An updated 10-year data set with hourly observations from 2007-2016 was used for overall GFK wind coverage calculations. The all-weather wind analysis for GFK is summarized in **Table 4-17**.



Table 4-17 – All-Weather Wind Analysis

Runway	AAC-ADG	Crosswind Component (Wind Speed)			
		10.5 knots	13.0 knots	16.0 knots	20.0 knots
Runway 17-35	D-IV	90.98%	94.95%	98.05%	99.43%
Runway 9-27	B-II	75.72%	83.55%	92.16%	97.01%
Combined*	-	97.59%	99.20%	-	-

*Combined assumes up to maximum common design aircraft crosswind component for all runways

Source: [National Climatic Data Center](#) data from GFK ASOS (2007-2016; 91,416 observations), KLJ Analysis

The existing and future design aircraft crosswind component (20 -> 16 knots) is accommodated on Runway 17-35 during all-weather conditions with the wind coverage exceeding 95 percent.

Runway 17-35 alone does not provide adequate all-weather wind coverage for up to a 13-knot crosswind component. A crosswind runway is needed to achieve 95 percent all-weather wind coverage for up to ARC A-II and B-II aircraft types. The addition of a crosswind runway provides a 4.25% increase in wind coverage over Runway 17-35 runway alone.



*Large Airplane Crosswind Landing
(YouTube)*

Due to the high volume of flight training activity primarily conducted during VMC, a VMC-only wind analysis was completed at GFK with results in **Table 4-18**.

Table 4-18 – VMC Wind Analysis

Runway	AAC-ADG	Crosswind Component (Wind Speed)			
		10.5 knots	13.0 knots	16.0 knots	20.0 knots
Runway 17-35	D-IV	90.88%	94.89%	98.04%	99.45%
Runway 9-27	B-II	77.55%	85.15%	93.42%	97.81%
Combined*	-	97.74%	99.28%	-	-

*Combined assumes up to maximum common design aircraft crosswind component for all runways

Source: [National Climatic Data Center](#) data from GFK ASOS (2017-2016; 82,704 observations), KLJ Analysis

Runway 17-35 alone does not provide recommended 95 percent for a 13-knot crosswind component. A crosswind runway is needed to achieve 95 percent VMC wind coverage for up to ARC A-II and B-II aircraft types, which includes small ARC A-I and B-I aircraft types. The currently runway length does not accommodate all ARC A-II or B-II aircraft.

Table 4-19 summarizes the IMC wind coverage by runway and by runway end. Runway 17-35 alone does not provide recommended IMC wind coverage for a 10.5 crosswind component. A crosswind runway is needed to achieve 95 percent IMC wind coverage for up to ARC A-I and B-I aircraft types.

Table 4-19 – IMC Wind Analysis

Runway	AAC-ADG	Crosswind Component (Wind Speed)			
		10.5 knots	13.0 knots	16.0 knots	20.0 knots
Runway 17-35	D-IV	91.88%	95.51%	98.07%	99.19%
Runway 9-27	B-II	59.68%	69.46%	81.13%	90.02%
Combined*	-	96.32%	98.58%	-	-

*Combined assumes up to maximum common design aircraft crosswind component for all runways

Source: [National Climatic Data Center](#) data from GFK ASOS (2007-2016; 9,342 observations), KLJ Analysis

Table 4-20 summarizes the IMC wind coverage by runway end. When reviewing each runway end, the Runway 35 end clearly accommodates the highest percentage of aircraft given the prevailing wind conditions during IMC. Runway 35L captures aircraft during the lowest weather minimums with a



published precision instrument approach. Runway 17R, 9L and 27L have published non-precision instrument approach procedures.

Table 4-20 – IMC Wind Analysis by Runway End

Runway	AAC-ADG	Crosswind Component (Wind Speed)			
		10.5 knots	13.0 knots	16.0 knots	20.0 knots
Runway 35 End	D-IV	61.94%	64.43%	66.08%	66.84%
Runway 17 End	D-IV	38.32%	39.47%	40.30%	40.48%
Runway 9 End	B-II	36.94%	40.90%	45.12%	47.79%
Runway 27 End	B-II	32.13%	37.38%	43.89%	49.97%

**Combined assumes up to maximum design aircraft crosswind component for each runway*

Source: [National Climatic Data Center](#) data from GFK ASOS (2005-2014; hourly)

Crosswind Runway Justification

At GFK, Runway 9L-27R is needed to provide at least 95 percent wind coverage for ARC A-II and B-II aircraft types with up to a 13-knot crosswind component. The current wind coverage is 93.52%. There were 4,357 documented IFR arrivals and departures in ARC A-II and B-II aircraft (non-FedEx) in 2016. The wind coverage “gap” between the primary runway and the crosswind runway at a 13-knot crosswind component is 4.25%. This yields 185 annual operations that would need the crosswind runway annually, which is less than the FAA’s regular use threshold of 500 annual operations.

Using the next lower crosswind category encompasses ARC A-I and B-I aircraft. The wind coverage “gap” between the primary runway and the crosswind runway at a 10.5-knot crosswind component is 6.61%. Annual operations in ARC A-I and B-I aircraft are estimated at over 290,449 annually, which yields over 19,000 operations requiring a crosswind runway exceeding the FAA’s regular use threshold.


WEATHER CONDITIONS

Cloud Ceiling & Visibility

When IMC weather conditions occur, aircraft must operate under IFR and utilize instrument approach procedures to land. IMC conditions drive the need for instrument approach procedures with sufficient weather minimums to enhance airport utilization.

The existing Runway 35L Instrument Landing System (ILS) approach weather minimums are 200-foot cloud ceiling and ½ mile flight visibility. Runway 17R has a vertically-guided GPS approach with minimums of 264-foot cloud ceiling and 1-mile flight visibility. Runways 9L and 27R both have vertically-guided GPS approaches approach weather minimums of 250-foot cloud ceiling and 1-mile flight visibility. Airlines operating at GFK are not currently equipped to fly vertically guided LPV approaches.

Weather conditions are broken down into occurrence percentages based on current instrument approach minimums in **Table 4-21**.

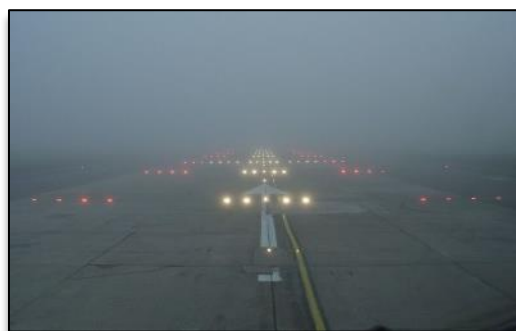

*Low Visibility Airport Operations
(skybrary.aero)*



Table 4-21 – Meteorological Analysis

Minimum Weather Condition	Cloud Ceiling Minimum	Visibility Minimum	Annual Hours	Total Observation Percentage
Above Marginal VMC	3,000 feet	5 miles	6,960	79.45%
Marginal VMC	1,000 feet	3 miles	1,080	12.33%
IMC as low as Category I	200 feet	½ mile	638	7.28%
IMC as low as Category II	100 feet	¼ mile	62	0.71%
IMC Category III & Below	< 100 feet	< ¼ mile	20	0.23%

Source: [National Climatic Data Center](#) data from GFK ASOS (2005-2014; hourly), KLJ Analysis

Based on cloud ceiling and visibility observations, GFK can be accessed 99.06% of the time with the current Category I (CAT-I) ILS approach. This equates to 82 hours per year or the equivalent of 3.4 days annually where the airport cannot operate.

An approach procedure with Category II (CAT-II) minimums could provide as much as another 62 hours or 2.5 days of accessibility per year. This could reduce the meteorological inaccessibility by over 75 percent. Implementing a CAT-II ILS requires additional airfield infrastructure and lighting equipment.

Achieving lower instrument approach weather minimums would increase airport utilization by reducing the frequency of diversions to alternative airports (or cancellations) during poor weather conditions. This is especially important for scheduled and on-demand passenger airline flights, air cargo, air ambulance and corporate operators that do not have the flexibility of scheduling flights around local weather conditions. Diversions result in significant lost business productivity, additional costs and a general inconvenience.

Each runway end was reviewed to quantify the benefit of lower approach minimums with results summarized in **Table 4-18**. Lowering minimums to ¾ mile visibility for Runway 17R, 9L and 27R each provided at most 0.12% net benefit or 10 total hours per year.

Table 4-22 – Additional Capture Meteorological Analysis

Runway End	Approach Type	Proposed Minimums	Additional Capture	Additional Capture Wind Coverage*	Net Additional Capture	Net Additional Utility
35L	PA (CAT-II)	100 feet, 1200 RVR	0.71%	69.23%	0.49%	52.1%
17R	PA (CAT-I)	200 feet, ½ mile	1.09%	35.34%	0.38%	19.0%
9L	APV	250 feet, ¾ mile	0.38%	30.69%	0.12%	6.3%
17R	APV	250 feet, ¾ mile	0.38%	25.83%	0.10%	4.8%
27R	APV	250 feet, ¾ mile	0.38%	11.72%	0.04%	2.7%

Source: [National Climatic Data Center](#) data from GFK ASOS (2005-2014; hourly), KLJ Analysis

RVR = Runway Visual Range, n.m. = statute miles (reported), APV = Approach with Vertical Guidance, PA = Precision Approach

*Wind coverage by runway end only using maximum crosswind components per [FAA AC 150/5300-13A](#).

Lowering approach minimums for Runway 35L to a CAT-II ILS would have the most net benefit by providing an additional 52.1% of additional utility or 43 total additional hours per year (2 days). This could reduce the inaccessibility of the airport due to meteorological conditions by half. A CAT-II ILS system is difficult to justify for FAA funding as a stand-alone project. An interim improvement of lowering visibility minimum to 1800 RVR (3/8 mile) is possible by installing in-pavement runway lighting however.

Lower minimums on Runway 17R to 200-foot cloud ceiling and ½ mile visibility (precision approach) would provide 19.0% of additional airport utility or 33 total hours per year. It is recommended the airport pursue lower approach minimums on Runway 17R through GPS technology and the establishment of an approach lighting system. GPS currently can provide minimums nearly equivalent to CAT-I precision approaches. Further coordination with FAA is required to conduct a feasibility study for the lowest weather minimums to runway ends.



Significant infrastructure improvements to lower instrument approach minimums to other runway ends is not recommended because of the low additional net utility.

Lowering approach weather minimums however requires additional airfield infrastructure and safety areas of varying degrees that will be covered in the Instrument Procedures section. **It is recommended GFK explore the following approach procedure enhancements:**

- **Accommodate a future GPS precision approach (1/2 mile) to Runway 17R.**
- **Plan to accommodate CAT-II ILS approach (1600 RVR, 1/4 mile) to Runway 35L ultimately with an interim improvement to 1800 RVR.**
- **Upgrade all runway ends to achieve the lowest minimums without substantial improvements or airfield design impacts. Coordinate with FAA Flight Procedures Office.**

Infrastructure and navigational aid standards for improvements are outlined further in this chapter. Options for improvements will be evaluated in **Chapter 5: Alternatives Analysis**.

Temperature

Average high temperature data for the hottest month was reviewed from climate data available from the NCDC for GFK. Using locally available data from Grand Forks, the average high temperature in the hottest month from 2006-2015 was 82.6 degrees Fahrenheit. On average, there are 9.5 days per year where the high temperature is at or above 90 degrees. This NCDC data from 1981-2012 indicates the average high temperature in July to be 81.0 degrees Fahrenheit. Temperature affects recommended runway lengths.

Airfield Capacity

LOCAL & NATIONAL CONSIDERATIONS

UND Aerospace has the world's largest flight training program - based at GFK. UND contributes approximately 90 percent of the total annual operations at GFK, virtually all of which is for flight training with student pilots. There is currently a national pilot shortage that is forecast to worsen in part because of 2013 legislation to increase minimum hours to obtain an Air Transport Pilot certificate. There are not enough new pilots in the pipeline to replace retiring pilots, which will lead to reduced flights if not solved. UND's ability to train new pilots will have a significant impact in solving the pilot shortage. UND flight program enrollment is increasing; however, the staff has expressed they will reach capacity by 2019 because of airfield and airspace limitations. Capacity improvements become an issue of national importance.

BACKGROUND

A master planning-level airfield capacity analysis was completed using the methods outlined in [FAA AC 150/5060-5, Airport Capacity and Delay](#) and [Airport Cooperative Research Program \(ACRP\) Report 79: Evaluating Airport Capacity](#). Due to the unique operations at GFK and the increased activity, an update review was completed using the Spreadsheet Capacity Model available from [ACRP Report 79](#). Additional technical information on airfield capacity calculations can be found in **Appendix G: Airfield Capacity Analysis**.

FAA has historically defined total capacity of the airfield as the measure of the maximum number of annual aircraft arrivals and departures capable of being accommodated for a runway and taxiway configuration. Delay occurs when operations exceed the available capacity at an airport. Airports should plan to provide capacity enhancements well in advance to avoid unacceptable operational delays.

Airfield capacity is measured using various metrics as defined by FAA:

- **Hourly Capacity:** The maximum number of aircraft operations that can take place on a runway system with a specific runway use configuration in a 1-hour period.



- **Annual Service Volume (ASV):** The reasonable (practical) estimate of an airport's annual capacity accounting for differences in runway use, aircraft mix, weather conditions, etc. that would be encountered over a year's time.
- **Delay:** The added trip time attributable to congestion at the study airport, where congestion constitutes any impediment to the free flow of aircraft and/or people through the system.

Annual capacity estimates determine the number of operations at which new airfield infrastructure would be needed to accommodate demand.

INPUT FACTORS

Aircraft Fleet Mix

Different types of aircraft operating on an airport impacts airport capacity. In addition to required arrival and departure flow separation requirements between similar aircraft types, aircraft with different speeds require additional spacing requirements to maintain minimum separation. Greater spacing is also required for small aircraft to avoid wake turbulence created by larger aircraft. The airport's fleet mix index is established using guidelines established in [ACRP Report 79](#) identified in Table 4-23.

Table 4-23 – Aircraft Fleet Mix Classifications

Aircraft Classification	Characteristics
Small - S	Less than 12,500 lbs. (Single Engine)
Small - T	Less than 12,500 lbs. (Twin Engine)
Small +	Corporate airplanes between 12,500 lbs. and 41,000 lbs.
Large - TP	Turboprop between 12,500 lbs. and 255,000 lbs.
Large - Jet	Jet between 41,000 lbs. and 300,000 lbs.
Large - 757	Boeing 757 series
Heavy	More than 300,000 lbs.

Source: [ACRP Report 79](#)

The aircraft fleet mix percentage for capacity calculations is based on the aviation activity forecasts. Overall fleet mix assumptions for GFK are summarized in Table 4-24.

Table 4-24 – Aircraft Fleet Mix Assumptions

Aircraft Classification	Base	PAL 3	PAL 4
Small - S	80.1%	81.7%	82.0%
Small - T	16.6%	15.8%	15.7%
Small +	1.5%	1.0%	0.9%
Large - TP	0.0%	0.0%	0.0%
Large - Jet	1.5%	1.2%	1.1%
Large - 757	0.1%	0.4%	0.3%
Heavy	0.2%	0.0%	0.0%
Total Annual Operations	324,196	350,477	383,247

Source: [ACRP Report 79](#), KLJ Analysis

Meteorological Conditions

GFK meteorological data was analyzed to determine how often the airfield is operational. This affects the overall capacity of the airfield as runway fleet mix and hourly are affected by the prevailing weather. Conditions are split into VMC, IMC and periods when the airport is unusable due to weather below minimums. As shown in Table 4-25, the clear majority of flight operations are conducted in VMC.



Table 4-25 – Airport Meteorological Conditions

Weather Condition	Percent of Year
Visual Meteorological Conditions (VMC)	91.78%
Instrument Meteorological Conditions (IMC)	7.28%
Below IMC (Closed)	0.94%

Source: [National Climatic Data Center](#) data from GFK ASOS (2005-2014; hourly), KLJ Analysis

Runway Use

Each GFK airfield traffic flow pattern has a set of two independent runways that remain operational for small aircraft. Primary Runway 17R-35L is the only runway that can consistently accommodate large aircraft because of its length. Because Runway 17R-35L and secondary Runway 9L-27R intersect, all east-west runway operations must cease when Runway 17R-35L is in use by large aircraft. Delays are extended to mitigate the effects of wake turbulence created by the departure of the larger aircraft.

GFK has five non-intersecting, converging runways configurations as identified by FAA¹. GFK ATCT has implemented several mitigation measures to maintain safety, which result in reduced capacity and increased delays. **Converging runway operations at GFK need to be addressed given the total volume of traffic.**

Local GFK ATCT prefers to use a north-south flow pattern, with an east-west flow only used when a crosswind component on the north-south runway is 13 knots or greater to minimize and mitigate the safety risks of converging traffic. FAA standards² indicate that the active runway is selected most nearly aligned with the wind at a speed of 5 knots or more. The base scenario of this capacity review assumes small aircraft utilize the runway best oriented into the wind at wind speeds of 5 knots or greater. Please see **Appendix G: Airfield Capacity Analysis** for details on runway use calculations.

Using historical VMC and IMC weather observations, a north-south traffic flow scenario is preferred 262 days per year, or 71.99% of the time. An east-west flow is preferred 99 days per year, or 27.07% of the time. This is a significant increase over the current north-south traffic flow used 95.91% of the time with a maximum 13-knot crosswind component.

Other Modeling Considerations

GFK ATCT staff provided runway occupancy time information used for the [ACRP Report 79](#) Spreadsheet Capacity Model. A “stop-and-go” operation conducted by UND on average results in a 15 percent decrease in runway occupancy time over a traditional full-stop landing. This occurs approximately 50 percent of the time in flight training aircraft.

Based on input from local ATCT staff, runway crossing delays occur 2 times during the peak hour when the airport was in an east-west flow. The average total crossing delay was assumed to be five minutes each time to allow wake turbulence to dissipate. Other demand and operational inputs were used from the Aviation Forecasts and GFK ATCT staff interviews.

HOURLY CAPACITY


Using the factors described above, the hourly capacity is calculated for different airfield operational scenarios using the guidance in [ACRP Report 79](#). A summary of the calculated hourly capacity figures is shown in **Exhibit 4-26**. **The calculated current design hourly volume exceeds the available capacity for each individual runway scenario.**

¹ *Safety Guidance, ATO-SG-14-04, Non-Intersecting Converging Runway Operations with extended Centerlines that Intersect within 1 NM of Either Departure End for Phase III Airports (April 28, 2014)*

² *FAA Order JO 7110.65 - Air Traffic Control, Section 5, Paragraph 3-5-1.*



Exhibit 4-26 – Runway Hourly Capacity

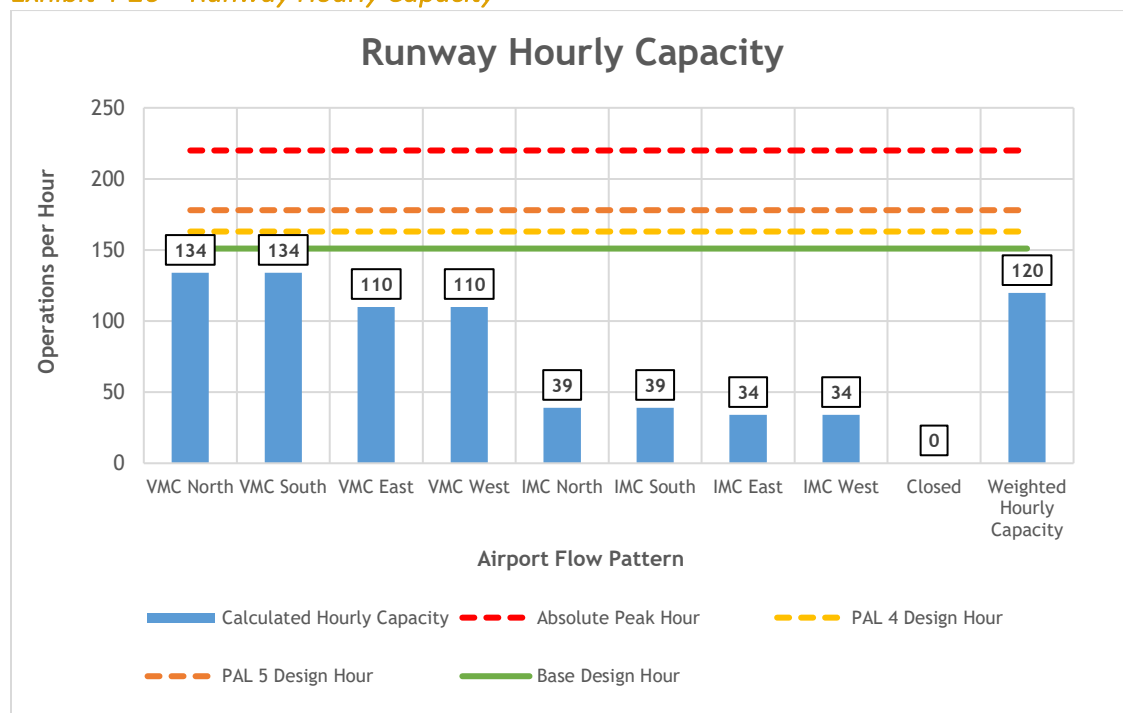

Source: [National Climatic Data Center](#) data from GFK ASOS (2005-2014; hourly), [ACRP Report 79 Spreadsheet Capacity Model](#), KLJ Analysis

IMC = Instrument Meteorological Conditions, VMC = Visual Meteorological Conditions

ANNUAL SERVICE VOLUME

Annual Service Volume (ASV) is the estimate of the airport's annual capacity to accommodate aircraft operations considering the variations in a demand. ASV is intended to identify a threshold to which additional aircraft operations would result in a disproportionate increase in average aircraft delays.

ASV is calculated based on the weighted hourly capacity multiplied by hourly and daily demand ratios. The ratio of the total operations to an airport's ASV determines when an airport should plan for capacity improvements to increase overall capacity. **Table 4-27** summarizes the ASV calculations at GFK.

Table 4-27 – Annual Service Volume (ASV)

Metric	2008	Base (2014)	PAL 3	PAL 4
Annual Operations	230,220	324,196	350,477	383,248
Annual Service Volume	341,250*	392,519	392,519	392,519
Overall Capacity Level	67.6%	82.6%	89.3%	97.6%

Source: [FAA AC 150/5060-5, Airport Capacity and Delay](#), [ACRP Report 79](#), KLJ Analysis

*Calculated per 2008 Airport Master Plan prior to Runway 9R-27L construction

The existing airport has reached over 82 percent of its overall airfield capacity. GFK ATCT safety mitigation measures increases ASV by 4.4 percent to 410,039, but requires a much higher crosswind component for student pilots which is not ideal in a flight training environment.

[FAA Order 5090.3C, Field Formulation of the NPIAS](#) recommends airports plan for capacity development such as a new runway once capacity levels have reached 60 to 75 percent of annual capacity. Typically, airports plan for capacity enhancement projects at 60 percent of its annual capacity with implementation or demand management strategies occurring at 80 percent.

The lack of available GFK operational capacity (ground infrastructure and available airspace) and a subsequent increase in flight delays has led UND Aerospace to limit total annual flight training hours for



safety and efficiency. UND has noted their operation is at capacity and will not be able to accommodate any new pilots into the training program as soon as 2019. Flight training students are very sensitive to unproductive delays as they increase the student flight costs. **GFK is capacity constrained and should take steps to increase overall airfield capacity.**

AIRCRAFT DELAY

Aircraft delay exists because of the sheer volume of traffic at GFK and limitations to total throughput to maintain safety standards. Delay is measured in minutes per aircraft and hours per year. The FAA's assumptions identified in [FAA AC 150/5060-5, Airport Capacity and Delay](#) are used to develop delay measures and identify cost. In general, as the demand approaches ASV capacity so does delay.

Airfield Infrastructure

The runway/taxiway configuration provides capacity and limitations to the total number of takeoffs and landings. Limitations can create delays. Average delays for all flow patterns are summarized in **Table 4-28**. The highest existing delay occurs when in the east-west VMC flow pattern where calculated delays currently range between 0.6 and 2.1 minutes per aircraft (90% ASV).

Table 4-28 – Aircraft Delay

Factors	Base	PAL 3	PAL 4
Capacity Level	82.6%	89.3%	97.6%
Single Aircraft Delay (Minutes)			
Avg. Aircraft Delay Range	0.5 -> 1.7	0.6 -> 2.1	0.9 -> 3.0
Average Aircraft Delay	1.1	1.4	2.0
Annual Delay (1,000s Minutes)			
Average Aircraft Delays	357	491	766
Annual Delay Cost (2015 dollars)			
Average Aircraft Delays	\$1,592,000	\$2,090,000	\$3,233,000

Source: [FAA AC 150/5060-5, Airport Capacity and Delay](#), KLJ Analysis

Without airfield capacity improvements, overall peak average delays in the future are calculated to approach 2.5 minutes per aircraft by PAL 4. When GFK is operating in an east-west flow with reduced capacity, peak average delays increase to 5.5 minutes per aircraft by PAL 4 (106% ASV).

Airspace

Additional delays occur because of airspace limitations within the airport traffic pattern. The traffic pattern is a rectangular aircraft sequence around a runway to perform takeoffs and landings. When the traffic pattern becomes congested with airplanes, aircraft are asked to extend their traffic pattern to accommodate more aircraft. This requires more flying time. Both factors result in individual airplane delays. Airspace delays occur even though the runway may be operating at peak efficient operational capacity for total takeoffs and landings. Airspace delays are summarized in **Table 4-29**.

Table 4-29 – Traffic Pattern Aircraft Delay

Factors	Standard	Busy	Congested
Total Aircraft in Traffic Pattern At One Time	4	6	8
Airspace Delay Per Aircraft In Circuit	0 minutes	2.6 minutes	5.2 minutes
Delay Per Aircraft Operation for Large Aircraft ³	0.4 minutes	0.6 minutes	0.8 minutes
Total Additional Time Per Aircraft for 6 Circuits	4 minutes	22 minutes	40 minutes
Average Annual Aircraft Delays (1,000s of Minutes)	12	65	117
Average Annual Aircraft Delay Costs	\$166,000	\$1,301,000	\$3,316,000

Source: [FAA Order 7400.2, Procedures for Handling Airspace Matters](#), KLJ Analysis

³ Large aircraft delays currently occur on Runway 17L-35R and 9L-27R only due to concurrent or crossing aircraft operations.



SUMMARY & RECOMMENDATIONS


The purpose of this review is to provide a master planning-level review of airport capacity for long-range planning. **Exhibit 4-31** graphically summarizes the capacity analysis.

Total airfield capacity improvements to improve overall airfield capacity should be planned now and implemented as soon as possible as the current Annual Service Volume exceeds 80 percent. UND Aerospace has already restricted capacity to reduce flight training delays, and cannot increase student pilot enrollment to meet demand.

Recommendations to address airfield capacity at GFK include:

- **Extend Runway 9L-27R to accommodate regular use of large aircraft and eliminate converging operations, thus enhancing safety.** This improvement would allow for independent operations on east-west runways, decreasing the average delays for this VMC traffic flow pattern. Overall airfield capacity would marginally improve. Operational safety risks would be reduced by eliminating converging operations and current ATCT mitigation measures.
- **Construct a north-south capacity runway for flight training aircraft.** Two dedicated GA training runways in a north-south flow pattern would reduce delays by over 3 minutes per aircraft hour at a minimum at unconstrained capacity levels. ASV would increase by 36 percent to 537,245 annual operations, accommodating unconstrained PAL 4 operations at a 71 percent capacity level. It would also free up additional airspace to conduct simultaneous uninterrupted traffic pattern operations in similar class aircraft, reducing the need to expand the traffic pattern size as often.

Exhibit 4-30 – Airfield Capacity Summary

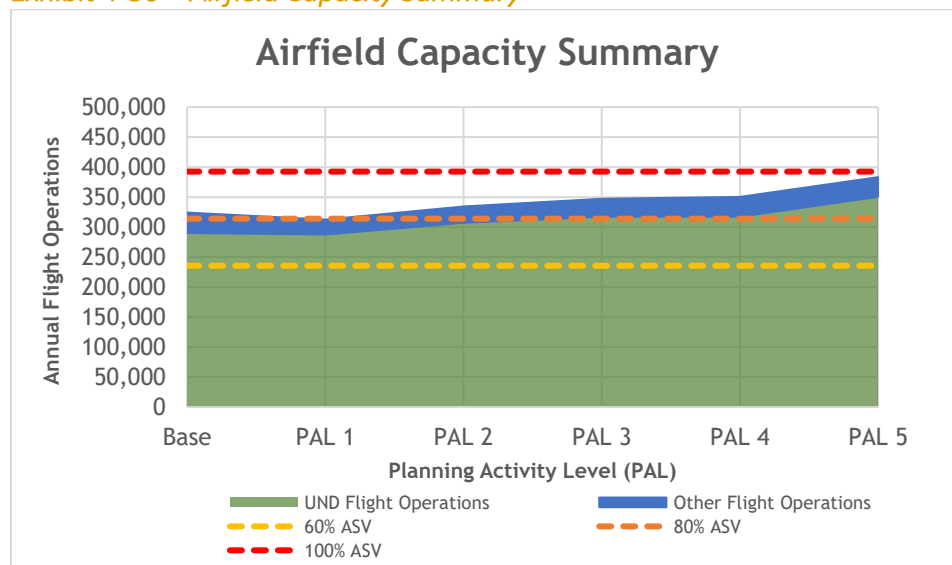

Source: KLJ Analysis

Runways

OVERVIEW

GFK has four (4) runways. Runway 17R-35L is the airport's primary runway and currently serves all GFK air carrier traffic. Both Runway 17R-35L and 9L-27R are maintained by the airport to FAR Part 139 standards.



Runway 17R-35L: GFK's primary runway is 7,351 feet long and 150 feet wide. This runway is currently designed to accommodate precision instrument approaches and aircraft weights up to 270,000 pounds dual-tandem wheel. The runway pavement is in good condition with its last major rehabilitation in 2001. This runway is equipped with High Intensity Runway Lighting (HIRL), and has precision pavement markings.

Runway 9L-27R: GFK's crosswind runway is 4,206 feet long and 100 feet wide. This runway is currently designed to accommodate non-precision instrument approaches with vertical guidance and aircraft weights up to 55,000 pounds dual-wheel. This pavement condition is in very good condition. This runway is equipped with Medium Intensity Runway Lighting (MIRL), and has non-precision pavement markings.

The other two runways (17L-35R and 9R-27L) are used exclusively for small general aviation traffic, primarily for University of North Dakota flight training operations.

Runway 17L-35R: This general aviation runway is 3,901 feet long and 75 feet wide. This runway is currently designed to accommodate visual approaches and aircraft weights not exceeding 12,500 pounds. The runway's pavement is in good condition. Last major reconstruction/rehabilitation took place in 1988. This runway is equipped with Medium Intensity Runway Lighting (MIRL) and has visual pavement markings.

Runway 9R-27L: This general aviation crosswind runway is 3,300 feet long and 60 feet wide. This runway is currently designed to accommodate visual approaches and aircraft weights not exceeding 12,500 pounds. The runway's pavement is in very good condition and was constructed in 2009. This runway is equipped with Medium Intensity Runway Lighting (MIRL) and has visual pavement markings.

Helipads (H1 - H12): Twelve (12) helipads were designated as official landing areas in 2015. Each helipad has dimensions of 60 feet by 60 feet and is a turf surface. Helipads are located on the east quadrant of the airport and depicted on the ALP, primarily used for helicopter flight training activity.

CONFIGURATION


Runway 17R-35L and 17L-35R are parallel north-south runways with runway centerline separation distance of 3,680 feet. Runway 9R-27L and 9L-27R are parallel east-west runways and have a separation distance of 5,200 feet. Runway 17R/35L and 9L/27R are intersecting runways.

A minimum separation distance of 700 feet is needed for visual operations. Simultaneous radar departures require a distance of at least 3,500 feet. Simultaneous approaches (non-precision) require a minimum separation distance of 2,500 feet when runway thresholds are not staggered.

Although operations are conducted safely, the Grand Forks Air Traffic Control Tower (ATCT) identified systemic safety issues associated with Runway 9L-27R. In a memorandum prepared October 22, 2015 and at a Safety Risk Management (SRM) Panel conducted on May 23, 2017 (see Appendix X), the following issues are present with the current airfield configuration:

- **ATCT Memorandum**

- GFK has one of the highest volumes of training students and traffic volumes in the nation.
- A north-south traffic runway configuration allows GFK ATCT to work an optimal flow of traffic.
- When weather conditions dictate otherwise, an east-west traffic flow is utilized.
- The dimensions of the east-west runways limit operations to mainly small aircraft.
- Larger aircraft including business jets, passenger carrying air taxi aircraft and air carriers require the use of Runway 17R-35L.

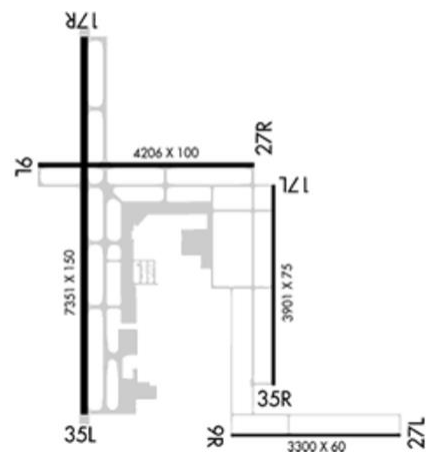



- The use of Runway 17R-35L during an east-west traffic flow creates an intersecting runway, converging traffic patterns, and converging non-intersecting runway operations.
- Most simultaneous independent operations are no longer permitted with non-intersecting converging runways at GFK, requiring more ATCT effort to achieve required aircraft spacing for east-west traffic flow operations.
- The large volume of flight training traffic increases complexity of east-west traffic flow configurations resulting in the loss of pilot situational awareness, creating a rushed atmosphere for inexperienced pilots, increasing delays and creating wake turbulence concerns.
- A near mid-air collision occurred in May 2015 in a west traffic configuration⁶.
- **SRM Panel Discussion**
 - GFK ATCT is constantly monitoring the runway environment in the GFK ATCT. The staff is assessing all information available, developing operational mitigations or adjustments, and training controllers to keep pace with GFK's operations.
 - ATCT will react to the fluid environment to maintain safety. Current mitigations and operational forecasts suggest the airfield is approaching a saturation point that could ultimately require capacity-limited operations.
 - ATCT mitigation increases from 3 to as many as 11 with student traffic operating on the parallel Runway 9-27 patterns, depending on traffic departing or arriving on Runway 17R-35L. These mitigations increase workload and complexity in the airfield environment.
 - GFK ATCT staff supports the option to extend Runway 9L-27R as staff believe the additional runway surface will add flexibility to mitigate operational challenges during east-west traffic flow with air carrier operations on Runway 17R-35L.
 - According to GFK ATCT, by reducing density of the traffic pattern, smaller aircraft will be easier to follow visually, and provide more taxiing area to help improve runway safety.

In summary, upgrading Runway 9L/27R is crucial in mitigating the operational challenges and complexity present at GFK during east-west traffic flow configuration.

RUNWAY DESIGN CODE

Per FAA design standards, the design aircraft and instrument approach minimums dictate Runway Design Code (RDC) standards for each runway end in both the existing and future planned elements. The RDC helps drive the framework for identifying any existing deficiencies and assists the airport in planning for future projects. Based on [FAA AC 150/5300-13A](#), individual RDCs are assigned to each runway end.

Runway 17R-35L: The existing RDC for Runway 17R is D-IV-5000 (not lower than 1 mile) and Runway 35L is D-IV-2400 (½ mile). **The recommended future RDC code for Runway 17R is C-III-4000 (not less than ¾ mile) and 35L's recommended future RDC is C-III-1200 (not lower than ¼ mile).** Factors involving the recommended changes include the change in design aircraft over time. Runway 17R's lower visibility minimums (not lower than ¾ mile) are based off a planned enhancement to that runway end. Runway 35L's lowered approach minimums are based off an ultimate CAT-II precision approach.

Runway 17L-35R: The existing RDC is B-II(Small)-VIS for both runway ends. **Recommended future RDC for both runway ends is B-II(Small)-5000 (Not lower than 1 mile).** It is not anticipated Runway 17L/35R will need to accommodate larger or heavier aircraft greater than 12,500 pounds in the future. However, planning for RNAV (GPS) approaches for both runway ends with vertical guidance will increase usability of the runway and provide flexibility of runway utilization during IMC. Runway 17L/35R and 17R/35L have a centerline separation distance to provide independent instrument

⁶ Small aircraft conducting go-around on Runway 27L came near a twin-engine turboprop powered aircraft arriving Runway 35L. Source: NASA Aviation Safety Reporting System (ACN: 1260126)



approaches and radar departures. This improvement will provide added benefit for those users located on the east side of the airport.

Runway 9L-27R: The existing RDC is B-II-5000 (not lower than 1 mile) for both runway ends. **Recommended future RDC is C-III-5000 (not lower than 1 mile) for the Runway 27R end, and C-III-4000 for the Runway 9L end.** Crossing delays are experienced twice per peak hour causing a 5-minute delay. Upgrading Runway 9L/27R for air carrier traffic is needed to increase airfield capacity, reduce delays, and eliminate converging traffic operations.

Runway 9R-27L: The existing RDC is B-I(Small)-VIS for both runway ends. **Recommended future RDC for both runway ends is to remain B-I(Small)-VIS.** It is not anticipated Runway 9R/27L will need to accommodate instrument approaches, larger or heavier aircraft in the future.

RUNWAY REFERENCE CODES

Runway Reference Codes (RRCs) indicate current operational capabilities where no special operations procedures are necessary, and without consideration of the actual runway length. The existing operational capabilities of the runway is identified based on a taxiway separation distance. Runway Reference Codes (RRCs) include an Approach Reference Code (APRC) and Departure Reference Code (DPRC). Also, multiple codes are possible for each runway end with an APRC.

At GFK, the current runway to parallel taxiway separation distance is 400 feet for all runways. **The runway and taxiway infrastructure does not limit existing, future, or ultimate RDC classifications at GFK.**

Runway 17R-35L: The existing APRCs for Runway 17R are D-IV-5000 and D-V-5000 (not lower than 1 mile). Runway 35L's existing APRC codes are D-IV-2400 and D-V-2400 (not lower than ½ mile). The existing DPRCs are D-IV and D-V for both runway ends. Future APRCs for Runway 17R are D-IV-4000 and D-V-4000 (not lower than ¾ mile). Runway 35L's future APRC codes are D-IV-1600 (not lower than ¼ mile) and D-V-2400 (not lower than ½ mile). Future DPRC codes remain the same (D-IV and D-V).

Runway 17L-35R: Existing APRCs for both Runway 17L and 35R are D-IV-VIS and D-V-VIS. The existing DPRCs are D-IV and D-V for both runway ends. Future APRCs for both Runway 17R and 35L are D-IV-5000 and D-V-5000 (not lower than 1 mile). Future DPRC codes for both Runway 17R and 35L are D-IV and D-V.

Runway 9L-27R: The existing APRCs for both runway ends are D-IV-5000 and D-V-5000 (not lower than 1 mile). Existing DPRCs are D-IV and D-V for both runway ends. Future APRC and DPRC codes remain the same in the future.

Runway 9R-27L: Existing APRCs for both 9R and 27L are D-IV-VIS and D-V-VIS. The existing DPRCs are D-IV and D-V for both runway ends. Future APRCs for both Runway 9R and 27L are D-IV-VIS and D-V-VIS. Future DPRC codes for both runway ends are D-IV and D-V.

DESIGN STANDARDS

Basic Safety Standards

One primary purpose of this master plan is to review and achieve compliance with all FAA safety and design standards. The design standards vary based on the RDC and RRC as established by the design aircraft. In addition to the runway pavement width, some of the safety standards include:

- **Runway Safety Area (RSA):** A defined graded surface surrounding the runway prepared or suitable for reducing the risk of damage to aircraft in the event of an undershoot, overshoot or excursion from the runway. The RSA must be free of objects, except those required to be in the RSA to serve their function. The RSA should also be capable to supporting airport equipment and the occasional passage of aircraft.
- **Runway Object Free Area (ROFA):** An area centered on the ground on a runway provided to enhance the safety of aircraft operations by remaining clear of objects, except for objects that need to be in the OFA for air navigation or aircraft ground maneuvering purposes.



- **Runway Obstacle Free Zone (ROFZ):** The OFZ is the three-dimensional volume of airspace along the runway and extended runway centerline that is required to be clear of taxiing or parked aircraft as well as other obstacles that do not need to be within the OFZ to function. The purpose of the OFZ is for protection of aircraft landing or taking off from the runway and for missed approaches.

Other basic design standards include runway surface gradient, runway shoulder width to prevent soil erosion or debris ingestion for jet engines, blast pad to prevent soil erosion from jet blast, and required separation distances to markings, objects, and other infrastructure for safety. Critical areas associated with navigational aids as well as airspace requirements are described further in this chapter.

Other Design Standards

Runways must meet line-of-sight requirements. Along individual runways, a point 5 feet above the runway must be mutually visible with any other point 5 feet above the runway centerline. For intersecting runways, Runway Visibility Zone (RVZ) standards require a clear visible 5-foot high line-of-sight to enhance safety amongst airport users when runways intersect. This is applicable at GFK as Runway 17R-35R and Runway 9L-27R intersect. Portions of the old air carrier apron are in the RVZ.

LAND USE CONTROL

Runway Protection Zone

The Runway Protection Zone (RPZ) is a trapezoidal land use area at ground level prior to the landing threshold or beyond the runway end. The RPZ's function is to enhance the protection of people and property on the ground. The RPZ size varies based on the runway's RDC. The RPZ is further broken down into two types and two areas:



- **Approach RPZ:** Approach RPZ begins 200 feet from the runway threshold.
- **Departures RPZ:** Departure RPZ begins 200 feet from the runway end or claimed Takeoff Runway Available (TORA).
- **Central Portion:** Land within the RPZ centered on runway centerline with a width matching the width of the ROFA.
- **Controlled Activity Area:** Land with the RPZ on the sides of the central portion.

FAA permissible land uses without further evaluation include farming that meets airport design standards, irrigation channels that do not attract wildlife, controlled airport service roads, underground facilities and unstaffed NAVAIDs that are required to be within the RPZ. Airport owners should, at a minimum, maintain the RPZ clear of all facilities supporting incompatible activities. It is desirable to clear all above-ground objects from the RPZ.

Exhibit 4-31 graphically depicts the characteristics of an RPZ.



Exhibit 4-31 – FAA Runway Protection Zone

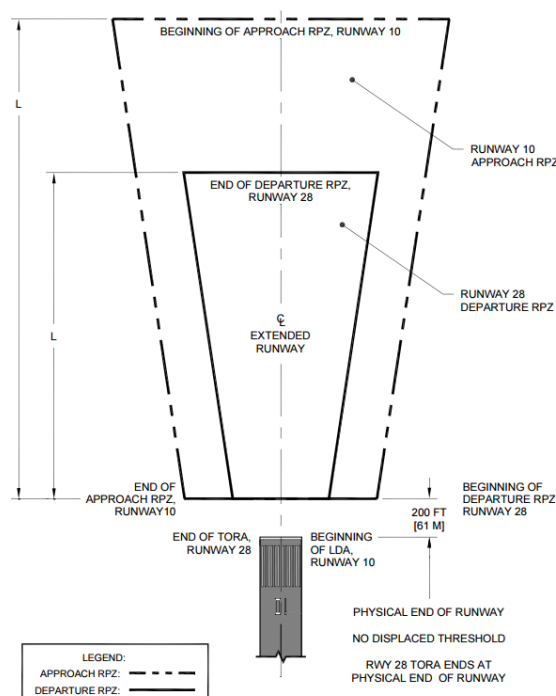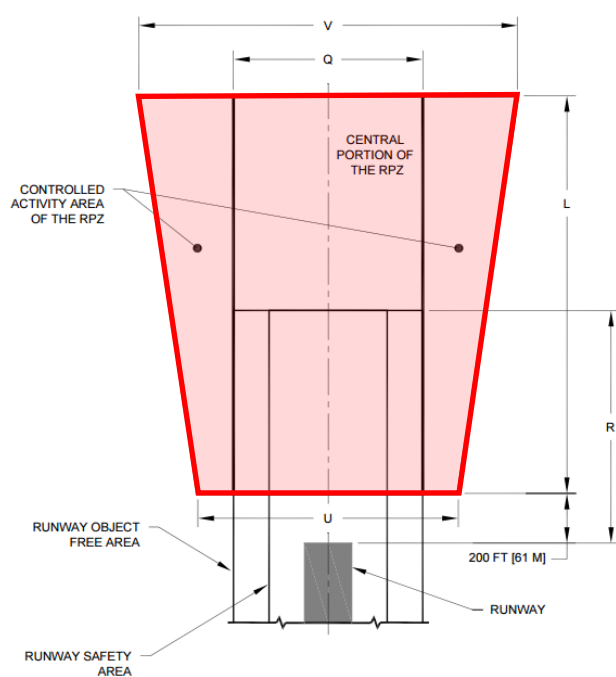

Source: [FAA AC 150/5300-13A, Change 1 \(Airport Design\)](#)

RPZs and the effort to ensure compatible land use within them are currently a high priority for the FAA. Protection of the RPZ is achieved through airport control over RPZs including fee title ownership or clear zone easement. The increased emphasis has resulted in additional requirements to monitor and analyze RPZs for conformance to established policies and standards.

In September 2012, FAA issued an [interim policy](#) on activities within an RPZ providing airports with guidance on land use compatibility standards. The standards from the interim guidance are summarized below:

- **New or Modified Land Uses:** FAA coordination is required for new or modified land uses within the RPZ because of an airfield project, change in RPZ dimensions or local development proposal.
- **Land Uses Requiring FAA Coordination:** Building and structures, recreational land uses, transportation facilities (i.e. roads, parking, rail), fuel storage, hazardous material storage, wastewater treatment, above-ground utility infrastructure
- **Alternatives Analysis:** A full range of alternatives must be evaluated prior to FAA coordination that avoid introducing the land use into the RPZ, minimize the impact of the land use in the RPZ and mitigate risk to people and property on the ground.
- **Existing Land Uses in the RPZ:** No change in policy, airports should work with FAA to remove or mitigate the risk of any existing incompatible land uses in the RPZ. Incompatible land uses in the RPZ from previous FAA guidance include but are not limited to residences, places of public assembly (i.e. uses with high concentration of persons), fuel storage facilities and wildlife attractants.

The following roadways and other significant man-made land uses are within the existing approach RPZs at GFK:

- **Runway 35L:** Public east-west road (U.S. Highway 2) is located 2,160 feet from runway threshold and traverses approximately 1,600 feet through the RPZ. In 2013 the Average Daily Traffic count was approximately 10,000 cars per day.



- **Runway 27L:** A storm water drainage-way located 550 feet from runway threshold and traverses 350 feet through the RPZ. Public north-south road (83rd St N) is located 780 feet from runway threshold and traverses approximately 400 feet through the RPZ. Approximately 4 acres of a private auto-parts salvage lot (vehicular parking facility) is also located within the RPZ beginning 800 feet from the runway threshold.

The land uses in the existing RPZs appear to be acceptable now. Further review is required if new land uses, runway end locations or a change in the size of the RPZ is proposed and a land use requiring FAA coordination is in the RPZ.

GFK should consider acquiring land to control all existing, future, and ultimate RPZs in fee simple or land use easement.

Land Acquisition

Per FAA, off-airport development has a negative impact on current and future airport operations when it creates obstacles to airport design, land use and airspace standards surrounding the airport. Land acquisition allows the airport to protect airspace and land use areas from possible intrusions. Acquiring all land is generally not feasible, and is usually supplemented by local zoning and easements to mitigate potential incompatible land uses and potential obstacle conflicts.

FAA encourages the airport sponsor to own the following land for existing and planned airport configuration:

- Airport Infrastructure
- Runway and Taxiway Object Free Areas
- Runway Protection Zones
- Building Restriction Line
- Navigational Aid Critical Areas
- Airspace Protection

Identified land acquisition areas to help meet current standards include acquiring remaining land use control within the Runway 27L RPZ. Land required for future development will be identified in **Chapter 5: Alternatives Analysis.**

Airport Zoning

FAA recommends airport sponsors protect airport land use and airspace through local zoning. Owners of public airports are encouraged to enact airport overlay zoning to protect airspace and surrounding land use for public safety. The intent of zoning is to:

- Protect the airport from incompatible land uses that could interfere with the safety operation of the airport,
- Protect public safety by reducing the potential for fatalities, property damage or noise complaints within the vicinity of the airport, and
- Protect the public investment made by taxpayers in the airport and the economic benefits it provides to the region restrict land uses

The procedural steps to enact an airport zoning ordinance are outlined in Chapter 2-04 of the North Dakota Century Code. This chapter, referred to as the “Airport Zoning Act”, is in **Appendix X: Airport Zoning**. GFK is located within city limits of Grand Forks surrounded by Rye and Brenna Townships in Grand Forks County.

GFK has an Airport Land Use Compatibility Plan (ALUCP) but it has not been adopted by surrounding jurisdictions. There is also no adopted height hazard zoning outside of airport property except for some restrictions in Airfield Preserve District south of the airport. **A new comprehensive airport land use compatibility/safety zoning ordinance is recommended for GFK to preserve and enhance compatible land use around GFK. FAA strongly encourages its implementation.** It must be adopted and enforced by all affected jurisdictions for it to be effective. More information can be found in **Chapter 6: Implementation.**



RUNWAY LENGTH

Sufficient runway length is important for the airport to maintain operational capability. It allows an aircraft operator to adequately serve their destinations with the appropriate payload (i.e. passengers & cargo). Restrictions on runway length may lead to reduced weight on a flight, which then translates in reduced fuel, passenger and/or cargo loads.

It is vital for airports to adequately plan for a future runway configuration as these projects tend to affect the community beyond the property line. Projects of these magnitude require many resources and long lead times for planning, environmental review, and funding allocation.

The recommended runway length for an airport facility varies widely based on runway usage (operational frequency), specific aircraft operational demands (aircraft type, weight/load), configuration (elevation, gradient) and meteorological conditions (temperature, runway surface condition). Runway surface condition is classified by Runway Condition Code (RCC) per the FAA's [Takeoff and Landing Performance Assessment \(TALPA\)](#) initiative implemented in 2016. An airport's runway length should be suitable to accommodate the forecasted design aircraft fleet.

Runway 17L-35R is the longest runway at GFK with a length of 7,351 feet. This runway was extended from 6,500 feet to its current length in 1970 to accommodate regular use of the Boeing 727 jet operated by Northwest Airlines at the time.

As of the date this Master Plan study was initiated, [FAA AC 150/5325-4B, Runway Length Requirements for Airport Design](#) was the current guidance for determining runway lengths at airports. Additional detail on the GFK runway length analysis is in **Appendix X: Runway Length Evaluation**.

Small Airplanes Up to 12,500 Pounds

The FAA design approach to determine recommended runway length in small aircraft is identified in Chapter 2 of [FAA AC 150/5325-4B](#). The method requires several steps to be performed including identifying percentage of fleet and using airport data to calculate runway length based on curves. Calculations for GFK are identified in **Table 4-32**.

Table 4-32 – FAA AC 150/5345-4B Runway Length Requirements ($\leq 12,500$ lbs.)

Airport and Runway Data	
Airport Elevation	845 feet
Mean Daily Maximum Temperature of Hottest Month	81.0°F
Aircraft Classification	Recommended Runway Length
Small Airplanes 12,500 Pounds or less	
10 or more passenger seats	4,200 feet
Less than 10 passenger seats at 100 percent of fleet	3,900 feet
Less than 10 passenger seats at 95 percent of fleet	3,300 feet

Source: [FAA AC 150/5325-4B](#), KLJ Analysis

Note: Runway length requirements estimated based on charts for airport planning purposes only.

For small general aviation aircraft, the FAA runway length requirements of 100 percent of fleet would apply at GFK due to its metropolitan location. **The recommended runway length for small general aviation aircraft is 3,900 feet.** This matches the existing runway length for Runway 17L-35R. This standard applies to Runway 17L-35R as new east-side general aviation hangar development in small aircraft will use this runway.

Small turbojet aircraft operated under [FAR Part 135, Operating Requirements: Commuter and On-Demand Operations](#) require additional runway length for landing operations. This standard requires a full-stop landing within 60 percent of the effective length of the runway. For a wet or slippery runway, an additional 15 percent factor is added. This calculation for small business jets yields a recommended runway length of 4,500 feet for a dry runway and 5,200 feet for a wet runway.



For small general aviation flight training aircraft, the FAA runway length requirements of 95 percent of fleet would apply at GFK. **The recommended runway length to accommodate flight training aircraft is 3,300 feet.** This matches the existing runway length for Runway 9R-27L.

Large Airplanes Up to 60,000 Pounds

The FAA design approach to determine recommended runway length in large aircraft greater than 12,500 pounds up to 60,000 pounds is identified in Chapter 3 of [FAA AC 150/5325-4B](#). The method requires several steps to be performed including identifying percentage of fleet, useful load factor and using airport data to calculate runway length based on curves.

The recommended runway length calculations at GFK for large aircraft up to 60,000 pounds are summarized in **Table 4-33**.

Exhibit 4-33 – FAA AC 150/5345-4B Runway Length Requirements (>12,500 but ≤ 60,000 lbs.)

Airport and Runway Data	
Airport Elevation	845 feet
Mean Daily Maximum Temperature of Hottest Month	81.0°F
Maximum Difference in Runway Centerline Elevation	2 feet (+20 feet)
Runway Condition	Wet and Slippery Runways
Aircraft Classification	Recommended Runway Length
Large Airplanes more than 12,500 Pounds but less than 60,000 Pounds	
100 percent of fleet at 90 percent useful load (Wet)	8,000 feet
100 percent of fleet at 90 percent useful load (Dry)	7,940 feet
100 percent of fleet at 60 percent useful load (Wet)	5,500 feet
100 percent of fleet at 60 percent useful load (Dry)	5,340 feet
75 percent of fleet at 90 percent useful load (Wet)	7,000 feet
75 percent of fleet at 90 percent useful load (Dry)	6,240 feet
75 percent of fleet at 60 percent useful load (Wet)	5,500 feet
75 percent of fleet at 60 percent useful load (Dry)	4,720 feet

Source: [FAA AC 150/5325-4B](#), KLJ Analysis

Note: Runway length requirements estimated based on charts for airport planning purposes only.

The 2016 IFR traffic operations from FAA Traffic Flow Management System Counts (TFMSC) was used to determine the design aircraft for large aircraft greater than 12,500 pounds up to 60,000 pounds. A total of 753 operations at GFK were performed in aircraft classified as 75 percent of fleet, meeting the FAA's regular use threshold. A total of 337 annual operations were conducted to destinations further than 500 miles away representing 90 percent useful load, however this does not meet FAA's regular use threshold. **The recommended existing runway length for 75 percent of the large business jet fleet aircraft at 60 percent useful load is 5,500 feet.** This length corresponds to the individual business jet runway length requirements landing on a wet runway when operated under FAR Part 135. **The recommended future runway length is 7,000 feet to accommodate 75 percent of the large business jet fleet at 90 percent useful load.**

FAA data from 2016 shows 232 business jet operations in 100 percent of fleet aircraft or greater were performed at GFK, requiring 5,500 feet of runway. About one-third of these operations were performed to destinations further than 500 nautical miles representing 90 percent useful load. If these aircraft operations continue to increase in numbers beyond 500 annually, then **the recommended ultimate runway length is 8,000 feet for 100 percent of business jet aircraft at 90 percent useful load.**



Aircraft Greater than 60,000 pounds

Existing

The FAA design approach identified in Chapter 4 of [FAA AC 150/5325-4B](#) for aircraft greater than 60,000 pounds requires reviewing the individual aircraft performance based on how the aircraft actually operates at the airport.

FAA data was used to determine design aircraft at GFK. In 2015, the existing design aircraft was the McDonnell Douglas (Boeing) MD-83 aircraft operated by Allegiant Airlines, with 502 annual operations. Staff from Allegiant Airlines report that on a summer day with a wet runway, the MD-83 requires 8,400 feet for takeoff to Orlando/Sanford, FL or Phoenix/Mesa, AZ, and 8,200 feet for a flight to Las Vegas, NV. These flights are currently weight-restricted or cancelled if the runway is wet or contaminated (RCC: 5, 4 or 3).



Delta Air Lines CRJ-900
(Airliners.net)

In 2016, Allegiant Airlines operated 416 annual operations at GFK. When combined 100% of fleet business jet that operate more than 500 nautical miles (90 percent useful load), **the existing recommended runway length is 8,000 feet for the primary runway.** A runway length of at least 7,350 feet (existing primary runway length) is needed for 609 operations annually when accounting for Boeing 737 operations by non-scheduled air carriers.

Table 4-34 identifies the recommended runway lengths for existing design aircraft, which includes critical business jet operations. Air cargo aircraft have been removed as mainline flights ceased in October 2016. More detailed information is in **Appendix H: Runway Length Calculations.**

Table 4-34 – Existing Runway Length Requirements (> 12,500 and 60,000 lbs.)

Aircraft Type	Operator	Destinations	Useful Load Factor	Runway Length	Condition	2016 Ops.
Boeing MD-83 / MD-88	Allegiant	IWA/SFB/LAS	90%	8,200 feet	Wet Takeoff	416
100% of Business Jet Fleet	Various	> 500 nm	90%	8,000 feet	Wet Runway	88
Recommended Existing Runway Length:				8,000 feet		504
Boeing 737 Series	Various	Various	90%	7,500 feet	Takeoff	105
Actual Existing Runway Length:				7,350 feet		609
Bombardier CRJ-900	Delta	GFK	MLW	7,300 feet*	Snow Landing	941
Bombardier CRJ-200	Delta	GFK	MLW	7,000 feet*	Snow Landing	3,004
75% of Business Jet Fleet	Various	> 500 nm	90%	7,000 feet	Wet Runway	249
Airbus A319 / A320	Allegiant	IWA/SFB/LAS	82%	6,700 feet	Wet or Snow Landing	339

Source: FAA Traffic Flow Management System, Delta Air Lines, Allegiant Airlines, Airbus, Boeing, Embraer, Bombardier, KLJ Analysis

*Scenario assumed Maximum Landing Weight (MLW)

Future

The future design aircraft for runway length calculations is expected to evolve. Allegiant Airlines is expected to phase out the MD-83 aircraft by 2019 and replace it with the Airbus A319 or A320 on existing routes. The Airbus A319/A320 requires 6,700 feet of runway for landing operations with a wet or contaminated runway (RCC: 5, 4 or 3) in the summer or winter per Allegiant Airlines.

After the retirement of the MD-83, the future design aircraft for runway length would evolve to be the Bombardier CRJ-900 operated by Delta Air Lines regional carriers. At Maximum Landing Weight, this aircraft demands a runway length of 7,300 feet to land on a contaminated runway (RCC: 3) which occurs frequently during the winter months at GFK. **The recommended future runway length to support CRJ-900 service is 7,300 feet based on manufacturer performance data.**



Potential new routes that would also influence runway length needs. One example is a new CRJ-900 flight from GFK to Denver, CO or Chicago, IL. These routes are more than double the current CRJ-900 stage length to MSP. It is possible this airplane would be operated at maximum takeoff weight for this stage length. The calculated runway length is 7,500 feet for a CRJ-900 and 7,400 feet for a CRJ-200 at 100 percent useful load. **The recommended future primary runway length is 7,500 feet to accommodate a fully loaded CRJ-900 departing for Chicago or Denver based on manufacturer airport planning manual data.**

Table 4-35 identifies the recommended runway lengths for future design aircraft types.

Table 4-35 – Future Runway Length Requirements (> 12,500 and 60,000 lbs.)

Aircraft Type	Operator	Destinations	Useful Load Factor	Runway Length	Condition	Fut. Ops
100% of Business Jet Fleet	Various	> 500 nm	90%	8,000 feet	Wet Runway	100
Boeing 737 Series	Various	Various	90%	7,500 feet	Takeoff	125
<i>Bombardier CRJ-900</i>	<i>UA or AA</i>	<i>DEN/ORD</i>	<i>100%</i>	<i>7,500 feet</i>	<i>Takeoff</i>	<i>730</i>
Recommended Future Runway Length (w/ New Service):				7,500 feet		955
Bombardier CRJ-900	Delta	GFK	MLW	7,300 feet*	Snow Landing	1,716
Recommended Future Runway Length (Existing Fleet):				7,300 feet		1,941
Bombardier CRJ-200	Delta	GFK	MLW	7,000 feet*	Snow Landing	1,664
75% of Business Jet Fleet	Various	> 500 nm	90%	7,000 feet	Wet Runway	300
Airbus A319 / A320	Allegiant	IWA/SFB/LAS	90%	6,700 feet	Wet or Snow Landing	1,196
Bombardier CRJ-900	Delta	MSP	90%	6,700 feet	Wet Landing	1,716
Bombardier CRJ-200	Delta	MSP	85%	6,500 feet	Wet Landing	1,664

Source: Delta Air Lines, Allegiant Airlines, Airbus, Boeing, Bombardier, KLJ Analysis

Yellow indicates forecast new service.

Ultimate

Ultimate runway length planning includes considering new routes, aircraft types and/or loading characteristics that require longer runway lengths. This assumes the 50-seat regional jets (e.g. CRJ-200, E145) and MD-83 aircraft are retired from airline service at GFK.

Many different aircraft types would require a runway length of 8,000 feet. An Airbus A320 would require 8,000 feet with a 100% departure load factor. These flights could be seen at GFK with an airline serving a southern destination with high load factors, although current A320 flights operate with lower load factors. Large business jets that operate with 90 percent useful loads would also require 8,000 feet. Although expected to occur infrequently, a Boeing 737-800 could require up to 8,500 feet for a fully-loaded flight at a 100% departure load factor. Any of these scenarios could trigger the need for additional runway length. **The recommended ultimate primary runway length is 8,000 feet.**

The summary of the forecasted ultimate runway length requirements is identified Table 4-36.



Table 4-36 – Ultimate Runway Length Requirements (> 12,500 and 60,000 lbs.)

Aircraft Type	Operator	Destinations	Useful Load Factor	Runway Length	Condition	Ult. Ops.
Boeing 737-800	Various	Varies	100%	8,500 feet	Takeoff	100
Airbus A320	Various	Varies	100%	8,000 feet	Takeoff	500
100% of Business Jet Fleet	Various	> 500 nm	90%	8,000 feet	Wet Runway	500
Recommended Ultimate Runway Length:				8,000 feet		1,600
Embraer E175	Various	MSP/DEN/ORD	N/A	7,800 feet	Snow Landing	-
Boeing 737 Series	Various	Various	90%	7,500 feet	Takeoff	125
Bombardier CRJ-900	DL or AA	DEN/ORD	100%	7,500 feet	Takeoff	730
Bombardier CRJ-900	Various	GFK	MLW	7,300 feet	Snow Landing	3,328
75% of Business Jet Fleet	Various	> 500 nm	90%	7,000 feet	Wet Runway	500
Boeing 717	Delta	MSP	80%	7,000 feet	Takeoff	530
Bombardier CRJ-900	Delta	MSP	90%	6,700 feet	Wet Landing	3,328
Airbus A319 / A320	Allegiant	IWA/SFB/LAS	90%	6,700 feet	Wet or Snow Landing	1,248
Bombardier CS100	Delta	MSP	79%	6,200 feet	Snow Landing	-

Source: Delta Air Lines, Allegiant Airlines, Airbus, Boeing, Embraer, Bombardier, KLJ Analysis
Yellow indicates forecast new service driving runway length needs.

Crosswind & Secondary Runways

Aircraft Convergence Mitigation

As stated earlier in this Chapter, upgrading Runway 9L-27R for air carrier use needs to be considered to improve airfield operational safety, increase the efficiency of air traffic, and increase operational capacity. This requires a runway length equal to 100 percent of the primary runway length when built for the same design airplane that uses the primary runway. The future recommended primary runway length is 7,300 feet based on the CRJ-900 design aircraft landing on a contaminated runway.

A crosswind runway capable of accommodate air carrier traffic would mitigate converging traffic issues. Converging traffic situations occur when the airport has high volumes of flight training activity and an air carrier aircraft is introduced onto a crossing runway. Significant UND flight training occurs during VMC when the runway is dry or wet (RCC: 6 or 5). To maintain sequential small and large aircraft flow patterns, if runways in-use were switched from the north-south to the east-west flow by local GFK ATCT at the FAA standard 5-knot crosswind condition ([FAA Order 7110.65](#), Para. 3-5-1), then Runway 9L-27R would be used 25.80% of the year during VMC (see [Appendix G](#)). A total of 3,137 operations are projected in the CRJ-900, A320 or more critical aircraft types as shown in [Table 4-35](#), not including any future new service. A total of 809 operations are calculated to use an extended Runway 9L-27R during VMC (25.8% x 3,137), meeting the FAA's regular use threshold. Therefore, the secondary air carrier crosswind runway should be designed to accommodate regular use of the CRJ-900 and A320 fleet during non-contaminated (dry or wet) runway conditions typically experienced during VMC. Runway 17R-35L would be primarily utilized during IMC and/or contaminated runways conditions.

According to Delta Air Lines representatives, a critical runway length of 6,700 feet is required for a common CRJ-900 landing from MSP at maximum landing weight in dry or wet conditions. **The recommended future length of Runway 9L-27R is 6,700 feet to mitigate existing converging traffic issues during dry or wet runway conditions for regular use air carrier design aircraft.** The primary runway would accommodate aircraft when the runway is contaminated.

Crosswind Wind Coverage

FAA recommends crosswind runways have a length capable of accommodating the lower crosswind capable aircraft expected to use this runway. The length of a runway must now be justified to accommodate the aircraft that requires its use.

At GFK, Runway 9L-27R is needed to provide at least 95 percent wind coverage for ARC A-II and B-II aircraft types with up to a 13-knot crosswind component. Regular use however is not achieved



presently. If the runway was used when the crosswind component to the north-south runway exceeds 5 knots, then the runway would be used 27.07% of the year during VMC and IMC. This calculates to 1,177 annual operations that would use the crosswind runway ($4,357 \times 27.07\%$), exceeding the FAA's regular use threshold. An example critical ARC B-II aircraft is the Cessna Citation series business jet. When operated at 60 percent useful load, the FAA recommended runway length is 5,500 feet.

Using the next lower crosswind category encompasses ARC A-I and B-I aircraft. Annual operations in ARC A-I and B-I aircraft are estimated at over 290,449 annually, which yields over 19,000 operations requiring a crosswind runway exceeding the FAA's regular use threshold using traditional wind coverage methods. An example critical ARC B-I aircraft is the Cessna Citation Mustang business jet with a weight of less than 12,500 pounds. The required length is covered by the FAA standard length of 3,900 feet for 100 percent of the small airplane fleet with less than 10 passenger seats. The recommended runway length for Runway 9L-27R using a traditional FAA crosswind methodology is 3,900 feet.

Secondary Capacity Runway

FAA recommends secondary capacity runways at capacity-constrained airports where the primary runway is operating at 60 percent or more of its annual capacity. The recommended runway length shall be for the less demanding airplane design group or design airplane. GFK currently operates at over 80 percent of its annual capacity because of small flight training aircraft operations. GFK has two secondary runways and a third secondary runway is recommended. FAA runway length requirements of 95 percent of fleet would apply to accommodate these aircraft at GFK. **The recommended runway length to accommodate capacity-driven secondary runways is 3,300 feet.**

Other

A temporary runway length of at least 6,000 feet is needed to meet airline company minimums to keep the airport minimally operational during runway construction periods.

Declared Distances

Declared distances are the maximum runway lengths available and suitable to meet takeoff, rejected takeoff and landing distance performance requirements for turboprop and turbojet powered aircraft. Declared distance elements include:

- **Takeoff Run Available (TORA):** the distance available for ground run of an aircraft taking off
- **Takeoff Distance Available (TODA):** TORA plus any remaining runway or clearway length
- **Accelerate-Stop Distance Available (ASDA):** the runway plus stopway length available for the acceleration and deceleration of an aircraft aborting a takeoff
- **Landing Distance Available (LDA):** the runway length available for the landing of an aircraft

For a normal runway, all lengths equal the total runway length. A special application of declared distances can be used to meet operational safety requirements. Declared distances can be used to mitigate approach/departure obstructions, land use incompatibilities, or incompatible airport design areas by adjusting usable runway lengths. They should not be used to increase available runway length. Declared distances are not currently utilized, nor are needed at GFK.

Runway Length Summary

The runway length needs at GFK for the existing (PAL 1), future (PAL 2), and ultimate (PAL 4) planning periods are identified in **Table 4-37**.



Table 4-37 – Runway Length Summary

Runway(s)	Runway Classification	Existing Length	Recommended Runway Length		
			Existing (PAL 1)	Future (PAL 1-2)	Ultimate (PAL 4)
17R-35L	Primary Air Carrier	7,350 feet	8,000 feet	7,500 feet	8,000 feet
9L-27R	Crosswind, Secondary Air Carrier	4,206 feet	6,700 feet	6,700 feet	6,700 feet
17L-35R	Secondary General Aviation	3,901 feet	3,900 feet	3,900 feet	3,900 feet
9R-27L, Other	Secondary General Aviation	3,300 feet	3,300 feet	3,300 feet	3,300 feet

Source: [FAA AC 150/5325-4B](#), KLJ Analysis

Note: Runway length requirements estimated for airport planning purposes only.

PAVEMENT STRENGTH

Airfield pavements should be adequately maintained, rehabilitated, and reconstructed to meet the operational needs of the airport. Typical airport pavements have a 20-year design life. The published pavement strength is based on the construction materials, thickness, aircraft weight, gear configuration and operational frequency for the pavement to perform over its useful life. Larger aircraft could occasionally exceed the pavement strength but not on a regular basis.

The new FAA standard for measuring the reporting pavement strength on runways with pavement strengths greater than 12,500 pounds is defined in [FAA AC 150/5335-5, Standard Method of Reporting Airport Pavement Strength](#). The Aircraft Classification Number - Pavement Classification Number (ACN-PCN) method is defined within this guidance. The PCN values measures the cumulative damage resulting from an aircraft fleet mix. In general, the PCN value should equal or exceed the ACN value assigned for the design aircraft. Public-use primary commercial service airports must report PCN figures. An ACN-PCN analysis was completed by the North Dakota Aeronautics Commission in 2012. An independent analysis was completed by KLJ as part of this study using an updated fleet mix for Part 139 runways. The results are summarized in **Table 4-38**.

Table 4-38 – Pavement Strength Requirements

Runway	Existing Published		Existing Calculated	
	Capacity	PCN	Capacity	PCN
Runway 17R/35L	75,000 (SW)	35/R/C/W/T	101,000 (SW)	39/R/C/W/T
	160,000 (DW)		134,000 (DW)	
	270,000 (DT)		216,000 (DTW)	
Runway 17L/35R	12,500 (SW)	9/R/C/W/T	12,500 (SW)	Not Calculated
Runway 9L/27R	43,000 (SW)	24/R/B/W/T	77,000 (SW)	28/R/C/W/T
	55,000 (DW)		95,000 (DW)	
	115,000 (DT)		167,000 (DTW)	
Runway 9R/27L	12,500 (SW)	10/R/C/W/T	12,500 (SW)	Not Calculated

Source: [GFK Airport Master Record \(FAA Form 5010-1\)](#), KLJ Analysis

SW = Single Wheel, DW = Dual Wheel, DT = Dual Tandem landing gear configuration

The newly calculated pavement strength calculations for the two Part 139 runways exceeds the current published strength. This may be due in part to the elimination of the heavier air cargo aircraft to the fleet mix used for the ACN-PCN calculation. The published PCN and weight bearing capacities should be adjusted accordingly.

Even with the loss of regular air cargo service, the pavement strength for Runway 17R-35L is not sufficient to accommodate regular use by the current passenger design aircraft at maximum takeoff weight without cumulative pavement damage. The assumed design aircraft for pavement strength



calculations is the MD-83 with an ACN of 52. The calculated PCN of Runway 17R-35L is 39. GFK should consider strengthening the runway to accommodate regular use of the most critical aircraft foreseen at the time. With the future phase-out of the MD-83, **GFK should plan to accommodate a fully-loaded Airbus A320 with an ACN of 51 when designing a future reconstruction of Runway 17R-35L.** The minimum equivalent pavement weight capacity should be 172,000 pounds dual-wheel.

The pavement strength for Runway 9L-27R appears to be sufficient to accommodate regular use by up to a CRJ-900 aircraft at maximum takeoff weight without damage. The current calculated runway PCN is 28. The future design aircraft is the same as the primary runway, an A320 with a 51 ACN. **GFK should strengthen Runway 9L-27R to accommodate use by air carrier aircraft.** The minimum equivalent pavement weight capacity should be 172,000 pounds dual-wheel.

The pavement strength to Runway 9R-27L and Runway 17L-35R are sufficient to accommodate the design aircraft of 12,500 pounds or less.

Equivalent ACN values for GFK design aircraft are listed in **Table 4-39**. More information on runway pavement strength can be found in **Appendix X: Airfield Pavements**.

Table 4-39 – ACN Values for Example Design Aircraft

Aircraft Type	Subgrade Strength	Gear Configuration	Flexible Pavement ACN Value	Rigid Pavement ACN Value
Cessna Citation X	C	DW	12	13
CRJ-200	C	DW	16	17
CRJ-900	C	DW	24	26
Runway 9L/27R (Calculated PCN: 28, Overload: 29)				
Gulfstream V	C	DW	30	33
Embraer E-195	C	DW	33	35
Bombardier CS100	C	DW	36	40
Boeing 717-200	C	DW	38	40
Runway 17R/35L (Calculated PCN: 39, Overload: 40)				
Airbus A319-100	C	DW	45	49
Boeing 757-200	C	DTW	47	45
Airbus A320-200	C	DW	47	51
MD-83	C	DW	50	52
Boeing 737-800	C	DW	51	56
Airbus A310	C	DTW	61	59
Airbus A300-600	C	DTW	74	64

Source: [Transport Canada](#). Colored cells exceed recommended overload ACN values. Note: ACN values reflect maximum gross weight which may differ from typical operational weight.

RUNWAY WIDTH

Runway width is driven by the RDC and approach visibility minimums for each runway as identified in [FAA AC 150/5300-13A](#).

All existing runway widths meet design standards. The minimum Runway 9L-27R width is 75 feet to meet ARC B-II crosswind runway requirements. Primary Runway 17R-35L requires a 150-foot wide runway as there were 860 annual operations in 2016 of in RDC C-II, D-II, or D-III airplanes with a maximum takeoff weight of 150,000 pounds or more that require a 150-foot wide runway. Examples include Boeing 737, Airbus A319/A320 and the Boeing MD-83/MD-88.

In the future, Runway 9L-27R should be designed for aircraft with maximum takeoff weight greater than 150,000 pounds and meet primary runway standards and mitigate all converging traffic. Therefore, **Runway 9L-27R should be widened to 150 feet in the future.** A temporary air carrier runway during construction requires a minimum 100-foot width per airline requirements.

In the future, all other runway widths shall remain the same as existing.



PAVEMENT SURFACE

Runway 17R-35L pavement consists of a grooved asphalt pavement surface. Runway grooving improves aircraft stopping performance when runway contaminants are present (water, ice, snow, slush, etc.). FAA recommends runway grooving or friction treatment for primary and secondary runways at commercial service airports. [FAA AC 150/5320-12C](#) considers this to be high priority safety work. Runway 9L-27R has concrete pavement and a grooved surface. All remaining runways (17L-35R, 9R-27L) consist of concrete pavement surfaces without any grooved surface.

RUNWAY DESIGNATION

Runway designation is determined by the magnetic bearing (azimuth) of the runway centerline which is relative to the location of the magnetic north pole. The runway designator number is the whole number nearest the one-tenth of the magnetic azimuth along the runway centerline when viewed from the direction of aircraft approach.

The 2015 magnetic declination at GFK is 3° 16' east, changing 0° 5' west per year as the location of the magnetic north pole moves over time. **Runway 17-35 should be re-designated in the future to 18-36.** FAA will determine if runways are to be re-designated. Runway 8-26 was re-designated to Runway 9L-27R in October 2008. Any change to runway designation will be made at the discretion of FAA as it requires the update of national aeronautical publications, procedures, and signage. The official FAA published magnetic declination is 6° east from 1985. See **Table 4-40** for details.

Table 4-40 – Runway Designation Requirements

Runway Designation	Existing Magnetic Bearing (2015)	Future Magnetic Bearing (2034)	Recommended Future Designation
Runway 17R-35L	176.76°/356.76°	175.07°/355.07°	18R/36L
Runway 17L-35R	176.77°/356.77°	175.09°/355.09°	18L/36R
Runway 9L-27R	86.74°/266.74°	85.05°/265.05°	Same
Runway 9R-27L	86.77°/266.77°	85.10°/265.10°	Same

Source: National Oceanic and Atmospheric Association (NOAA), KLJ Analysis

PAVEMENT CONDITION

In 2015, the North Dakota Aeronautics Commission (NDAC) completed a pavement management system update for GFK. The typical useful life of a bituminous pavement ranges from 20 to 30 years if properly maintained. The useful life for a concrete pavement can extend to 40 years and beyond. A summary of the existing runway pavement condition with recommendations is contained in **Table 4-41**:

Table 4-41 – Runway Pavement Condition & Recommendations

Runway ID	Pavement Condition Index (PCI)		Action Plan (Lowest PCI)		
	Highest PCI	Lowest PCI	0-5 Years	6-10 Years	11-20 Years
Runway 17R-35L	84	77	Maintain	Reconstruct	Maintain
Runway 17L-35R	81	80	Maintain	Maintain	Major Rehab.
Runway 9L-27R	93	90	Maintain	Maintain	Major Rehab.
Runway 9R-27L	97		Maintain	Maintain	Maintain

Source: North Dakota Aeronautics Commission Pavement Condition Assessment (2015), KLJ Analysis

NDAC identifies a PCI value of 75 to be a critical threshold for commercial service runways, 70 for general aviation runways, 65 for commercial service taxiways/aprons, and 60 for general aviation taxiways/aprons. PCI values below the critical threshold is recommended for major rehabilitation or reconstruction.

Runway 17R-35L: Runway 17R-35L surface is approximately 15 years old and is in Good condition. The runway was originally constructed in 1963 and extended in 1970. While pavement sections are in good condition, the runway has also experienced pavement heaving in multiple sections. A sub-surface analysis will be completed in 2017 to determine if there are deficiencies to the pavement section that



need to be immediately corrected. As of August 2017, preliminary results show the runway pavement section is in good condition; reconstruction within the next 5 years is not necessary. **Major rehabilitation or reconstruction will be needed within the next 6-10 years as the PCI value will drop below 75 by year 2020.** It is beneficial to plan for major construction while time is still available to plan around any operational hurdles that may arise with the complete reconstruction of the main runway.

Runway 17L-35L: Runway 17L-35R was originally constructed in August 1983 and is in Good condition. No major rehabilitation since original construction in 1983, Runway 17L-35R will approach the end of its useful life during this master planning period. Proper maintenance and care for the surface has allowed the pavement to stay in decent shape. **It is recommended GFK continue to maintain Runway 17L/35R runway and plan for major rehabilitation sometime within this master planning period.**

Runway 9L-27R: Runway 9L-27R was completed in August of 1992 and is still in excellent condition. The runway has an excellent PCI value considering that this pavement is 25 years old. It is recommended the airport continue to complete preventative pavement maintenance and extend the useful life of the surface. **However, it is still in the best interest of the airport to consider major Runway 9L-27R pavement rehabilitation over the course of this planning period due to the original age of the pavement.**

Runway 9R-27L: Runway 9R-27L was newly constructed in 2009 and commissioned in 2010. The runway is still in excellent condition. It is recommended the airport sponsor continue to monitor Runway 9L-27R pavement condition and apply preventative maintenance as required through the planning period.

More information on runway pavement condition can be found in **Appendix X: Airfield Pavements**.

DEFICIENCIES TO DESIGN STANDARDS

Known deficiencies to the existing runway design standards at GFK include:

- **Runway 17L-35R Object Free Area Penetrations (Vegetation)**
 - **Deficiency:** Multiple bushes appear to penetrate the ROFA on the east side. Above-ground objects protruding above the nearest point of the RSA would be cleared.
 - **Action Plan:** Some growth has been removed per WHMP recommendation. Recommend airport sponsor remove remaining growth within the next three years and maintain beyond.
- **Runway 9L-27R Object Free Area Penetration (Airfield Road)**
 - **Deficiency:** The airfield access road penetrates the ROFA on the south side near the Runway 9L end. Objects non-essential for air navigation or aircraft ground maneuvering purpose must not be placed in the ROFA.
 - **Action Plan:** Relocate airfield road outside of ROFA during next Taxiway B2 or roadway pavement rehabilitation project.

Any existing deficiencies to airport design standards would need to be noted in the ALP and a Modification to Design Standards requested from FAA if they are to remain.

Figure 4-1 depicts the existing airfield design standards, deficiencies and key facility needs.

GFK Other Airside Facility Needs

- Existing Design Aircraft - ARC D-III, TDG-4, 160,000 lbs. (MD-83)
- Future Design Aircraft - ARC C-III, TDG-3, 172,000 lbs. (Airbus A320)
- Increase Airfield Capacity to Meet Demands and Reduce Delays
- Mitigate Non-Intersecting, Converging Traffic
- Enact Multi-Jurisdictional Airport Land Use Compatibility/Safety Zoning Ordinance
- Provide Flexible Development Plan to Accommodate 99,000 SF of Additional Hangar Space (PAL 4)
- Provide up to 13,000 SF of Transient Aircraft Storage Space (PAL 4)
- Replace/Expand Customs and Border Protection (CBP) Facilities.
- Construct Complete Airfield Perimeter Road on Airport Property
- Protect Foreign Trade Zone (FTZ).
- Explore Compatible Non-Aeronautical Uses

GFK Terminal Building Facility Needs

- Expand Passenger Holdroom Seating Area (Existing - PAL 4)
- Additional Baggage Screening Area (PAL 1 - PAL 4)
- Expand Baggage Makeup Facility/Carousel Frontage (Existing - PAL 4)
- Expand Ticketing Lobby and Security Checkpoint (PAL 1 - PAL 4)
- Reserve Space for Third Security Screening Lane (PAL 4)
- Widen Airside Circulation Corridor (Existing - PAL 4)
- Increase Baggage Claim Device Frontage for Peak Demand (Existing - PAL 4)
- Preserve Flexibility for Optional Federal Inspection Service (FIS) Facility (Optional)

Legend

- Runway Protection Zone
- Airport Property
- Object Free Area
- Runway Safety Area

GFK Design Standard Deficiencies

1. Runway 17L/35R OFA Penetrations (Vegetation)
2. Runway 9L/27R OFA Penetration (Vehicle Holding on Access Road)
3. Direct Runway Access (Apron to Runway)
4. West General Aviation OFA Penetrations (Structures)
5. Alpha Apron TOFA Penetrations (Aircraft Parking)

GFK Key Facility Needs

6. Runway 17R/35L: Future Pavement Rehabilitation, Ultimate Extension to 8,000 Feet, Upgrade Approaches
7. Runway 9L/27R: Future Extension to 6,700 Feet, 150 Feet Wide, C-III Standards for Air Carrier Operations, Upgrade Approaches
8. Runway 17L/35R: Maintain ARC B-II-Small Standards, Add GPS Approaches
9. Runway 9R/27L: Maintain ARC B-I-Small Standards
10. Maintain Taxiways to 50 Feet Wide For Future Design Aircraft
11. Construct/Expand Holding Bays and Run-Up Pads for General Aviation Aircraft
12. Acquire Remaining Land In RPZ
13. Expand Air Carrier Apron/Identify Dedicated Deicing Area
14. Re-purpose FedEx Cargo Area/Facilities for Best Use
15. Redevelop West General Aviation Area for Corporate Hangar Area
16. Develop East General Aviation Area for Small General Aviation Aircraft
17. Expand Public and Employee Parking Supply
18. Expand Car Rental Parking/Ready Return Area
19. Replace Airport Traffic Control Tower with New Facility

OFA = Object Free Area
PAL = Planning Activity Level



0 1,000 2,000 4,000 Feet

*Intended for Planning Purposes Only



Grand Forks International Airport
Airport Master Plan
Design Standard Deficiencies/
Key Facility Needs
Figure 4-1

P:\Airport\ND\GrandForks\Projects\14515100\GIS\MP\Maps\4-1_Airfield_Needs.mxd TLG 9/15/2017



Instrument Procedures

Instrument approach procedures to a runway end are used by landing aircraft to navigate to the airport during instrument conditions when the cloud ceiling is less than 1,000 feet and/or visibility is less than 3 miles. Establishing approaches with the lowest possible weather minimums allow the airport to maximize its operational utility. Each approach type requires differing infrastructure and navigational aids. Approaches with lower visibility minimums typically have additional infrastructure and navigational aids requirements. Types of approach procedures include non-precision approach (NPA), approach with vertical guidance (APV) and precision approach (PA).

This section discusses possible instrument procedure upgrades/options that can be explored for GFK. FAA airport design standards must be met as shown in **Exhibit 4-42**. Further coordination with FAA Flight Procedures Office is recommended to review the feasibility of implementing any new approach procedure.

Exhibit 4-42 – FAA Airport Design Standards for Instrument Approach Procedures

Table 3-4. Standards for Instrument Approach Procedures

Visibility Minimums ¹	< 3/4 statute mile	3/4 to < 1 statute mile	≥ 1 statute mile straight-in	Circling ²
HATh ³	< 250 ft	≥ 250 ft	≥ 250 ft	≥ 350 ft
TERPS GQS ⁴	Clear	Clear	Clear	Not applicable
PA final approach surfaces ⁵	Clear	Not Required	Not Required	Not applicable
POFZ (PA & APV only)	Required	Not Required	Not Required	Not applicable
TERPS Chapter 3, Section 3	34:1 clear	20:1 clear	20:1 clear ⁶	20:1 clear ⁶
ALP ⁷	Required	Required	Required	Recommended
Minimum Runway Length	4,200 ft (paved)	3,200 ft ^{8,9}	3,200 ft ^{8,9}	3,200 ft ^{8,9}
Runway Markings (See AC 150/5340-1)	Precision	Non-precision ⁹	Non-precision ⁹	Visual (Basic) ⁹
Holding Position Signs & Markings (See AC 150/5340-1, AC 150/5340-18)	Precision	Non-precision ⁹	Non-precision ⁹	Visual (Basic) ⁹
Runway Edge Lights ¹⁰	HIRL / MIRL	HIRL / MIRL	MIRL / LIRL	MIRL / LIRL (Required only for night minimums)
Parallel Taxiway ¹¹	Required	Required	Recommended	Recommended
Approach Lights ¹²	MALSR, SSALR, or ALSF	Recommended ¹³	Recommended ¹³	Not Required
Applicable Runway Design Standards, e.g. OFZ	< 3/4-statute mile approach visibility minimums	≥ 3/4-statute mile approach visibility minimums	≥ 3/4-statute mile approach visibility minimums	Not Required
Threshold Siting Criteria To Be Met (Reference paragraph 303)	Table 3-2, row 7	Table 3-2, row 6	Table 3-2, rows 1-5	Table 3-2, rows 1-4
Survey Required ¹⁴	VGS	VGS (PA & APV) NVGS	NVGS ¹⁵	NVGS ¹⁶

Source: [FAA AC 150/5300-13A, Airport Design](#)

RUNWAY 35L APPROACH

Runway 35L presently has the lowest approach minimums available on the airport. With a 200-foot ceiling height and ½ mile visibility, these approach minimums are achieved with an approach lighting system (MALSR) and an Instrument Landing System (ILS). An upgraded approach procedure with Category II (CAT-II) minimums could reduce the inaccessibility to the airport by over 50 percent.

Upgrading to a CAT-II approach would require a Benefit-Cost Analysis (BCA) to be completed. As identified in [FAA Report ASP-76-1, Establishment Criteria for Category II Instrument Landing Systems \(ILS\)](#), typically an airport with at least 2,500 certificated air carrier instrument approaches would be a candidate for an upgrade to a Category II ILS. When counting all scheduled commercial (non-UND)



operations, GFK is not expected to meet this threshold in the planning period. FAA funding for such an improvement may be challenging.

[FAA Order 8400.2, Procedures for the Evaluation and Approval of Facilities for...All Category II...Operations](#), [FAA Order 6750.16D, Siting Criteria for Instrument Landing Systems](#) and [FAA AC 150/5300-13A Change 1, Airport Design](#) all identify the facility requirements to accommodate a Category II ILS approach. For Runway 35L to have CAT-II minimums, the following infrastructure would be required:

- Upgrading the existing MALSR approach lighting system to include Sequenced Flashing Lights (ALSF) equipment.
- In-pavement lighting to include runway centerline and touchdown zone lighting.
- Runway Visual Range (RVR) equipment at the touchdown, midfield, and rollout points located at least 400 feet from runway centerline.
- Electrical improvements to provide standby power to activate within one second of primary power failure.

Other than upgrading to the equipment noted above, design standards would remain the same for the current runway configuration. The decision to ultimately upgrade Runway 35L to CAT-II minimums should be evaluated in the Alternatives Analysis chapter.

In the interim, GFK may be able to achieve enhanced CAT-I ILS approach with 1800 RVR with the following facilities and FAA approval:

- In-pavement lighting to include runway centerline and touchdown zone lighting (TDZL)
- Runway Visual Range (RVR) equipment at the touchdown point located at least 400 feet from runway centerline (installed at GFK).

RUNWAY 17R, 9L-27R APPROACHES

The Runway 17R approach procedure with the best minimums is the RNAV (GPS) approach with vertical guidance with minimums as low as 264-foot cloud ceiling and 1-mile visibility (June 2016). Runways 9L and 27R have similar minimums with 250-foot cloud ceiling and 1-mile visibility. In certain instances, when strong winds blow from the south and east and the weather is below minimums, landing operations cannot occur.

An option to improve the usability of the airport is to lower the Runway 17R, 9L and 27R minimums on the RNAV (GPS) approach to no lower than $\frac{3}{4}$ mile and a ceiling height of feet. Lowering minimums to $\frac{3}{4}$ mile and 250-foot ceiling would allow for an additional 6.8 percent overall additional airport utility for Runway 9L, 4.8 percent for Runway 17R, and 2.7 percent for Runway 27R when considering wind coverage.

Typically, to achieve lower minimums as low as to $\frac{3}{4}$ mile the following improvements would be required:

- Implementation of a larger Runway Protection Zone (RPZ) of 1,700' x 1,000' x 1,510' in size.
- Outer width of Part 77 Approach Surface widens to 4,000 feet @ 10,000 feet.
- Per [FAA AC 150/5300-13A Change 1](#), obstacles must be clear from Table 3-2, Row 6 approach surface (and Row 8 approach surface for vertically guided approach).
- Construction of at least a basic approach lighting system (i.e. ODALS).

An approach lighting system allows a pilot to fly 100 feet above the ground along the approach, which increases chance of the pilot visually identifying runway to land. An ALS requires Inner Approach OFZ and Inner Approach OFZ Transitional Surface to be clear of objects not required for air navigation.

Per Table 3-4 of [FAA AC 150/5300-13A Change 1](#), an approach lighting system may be required to achieve a $\frac{3}{4}$ mile approach. FAA requirements identify the maximum height above touchdown (cloud ceiling) to be 260 feet to achieve $\frac{3}{4}$ mile without a lighting system.



FAA Flight Procedures was contacted as part of this study for Runway 17R approach enhancements. Per FAA, if trees were removed near the Runway 17R approach, then the cloud ceiling could be lowered to achieve $\frac{3}{4}$ mile visibility without the need for an approach lighting system. Further FAA coordination is recommended.

A future approach with minimums as low as $\frac{3}{4}$ mile is recommended for Runway 17R. Lower approach minimums are recommended for Runway 9L and 27R to increase airport utility if the runway is upgraded in the future for air carrier use. An approach lighting system is recommended for Runway 17R and 9L as this will provide the most additional utility.

PRECISION RUNWAY 17R APPROACH

Implementing a precision instrument approach to Runway 17R with $\frac{1}{2}$ mile visibility minimums would further improve the usability of Runway 17R's RNAV (GPS) approach during IMC conditions. This improvement would improve the utility of this runway end by 19 percent the existing condition. To achieve lower minimums down to $\frac{1}{2}$ mile, the following additional improvements would be required:

- Construction of a full approach lighting system (i.e. MALSR).
- Implementation of a larger Runway Protection Zone (RPZ) of 2,500' x 1,000' x 1,750' in size.
- Outer width of Part 77 Approach Surface widens to 4,000 feet @ 10,000 feet. An additional 40:1 surface applies out to 50,000 feet.
- Per [FAA AC 150/5300-13A Change 1](#), obstacles must be clear from Table 3-2, Row 7 approach surface (and Row 8 approach surface for vertically guided approach).
- Implementation of Precision Obstacle Free Zone (POFZ) which must remain clear of objects not required for air navigation.

An upgrade of Runway 17R would likely need to be based on a GPS approach. Few new Instrument Landing Systems (ILS) are being implemented nationwide as the national airspace system is transitioning to minimize the use of ground-based navigational aids. FAA funding would be unlikely.

GENERAL AVIATION RUNWAY APPROACHES

Runways 17L-35R and 9R-27L have existing visual approaches. With advancements in GPS technology, and the progression towards satellite-based navigation systems eventually becoming the standard for air-navigation, it is recommended GFK explore ultimate RNAV (GPS) approaches for the remaining four (4) visual approaches on the airfield. Runway 17L/35R would provide operational benefits to serve east General Aviation hangars. This would require some changes to the airfield to provide additional instrument procedures for the flight training traffic utilizing the airfield. To achieve RNAV (GPS) approaches on these four runway ends, the following improvements would be required:

- Painting of non-precision runway markings for Runways 17L-35R and 9R-27L
- Completion of aeronautical survey requirements (included in this Airport Master Plan)
- FAR Part 77 Primary Surface widens from 250 feet to 1,000 feet.
- Outer width of Part 77 Approach Surface widens to 2,000 feet @ 5,000 feet.
- Per [FAA AC 150/5300-13A Change 1](#), obstacles must be clear from Table 3-2, Row 4 approach surface (and Row 8 approach surface for vertically guided approach).

Implementing a non-precision GPS approach to Runway 17L-35R is recommended.

The decision to upgrade instrument approaches to accommodate the additional infrastructure needed for lowered instrument approach visibility minimums will be evaluated in the **Chapter 5: Alternatives Analysis**.

Airspace Protection

Airspace is an important resource around airports that is essential for safe flight operations. There are established standards to identify airspace obstructions around airports. [FAA grant assurances \(obligations\)](#) require the airport sponsor to take appropriate action to assure that airspace is



adequately cleared to protect instrument and visual flight operations by removing, lowering, relocating, marking or lighting, or otherwise mitigating existing airport hazards and preventing the establishment or creating of future airport hazards. Examples of obstructions include trees, buildings, poles, towers, terrain, mobile objects and aircraft tails. Sufficiently clear airspace near the approach and departure runway ends are vitally important for safe airport operations. An FAA aeronautical study should be completed to determine the operational impacts and necessary mitigation of obstructions (i.e. lowering, lighting, marking, publish operational restrictions).

As of the time of this report, an obstruction analysis is underway to identify obstructions to Part 77 and other airspace surfaces utilizing Aeronautical Survey data collected in September 2015. **There are no known airspace penetrations to the existing FAA airport design runway approach (threshold siting) surfaces.** There may be obstacles that penetrate other airspace surfaces that require further study. The full results of this analysis will be identified in the ALP drawing set. An Obstacle Action Plan in accordance with [2015 FAA guidance](#) will be developed from these results and identified in the ALP.

AREA AIRSPACE

The airspace classification including and within 5 nautical miles of GFK at 3,300 feet MSL and lower is Class D controlled airspace. Airport Traffic Control Tower (ATCT) safely and efficiently handles all operations within this airspace. There is also Terminal Radar Control (TRACON) service provided beyond the limits of Class D airspace for IFR aircraft and available to VFR aircraft. Class E airspace to the surface extends approximately an additional 3 miles to the north and south of the airport. The existing airspace classifications in the GFK area is considered sufficient to support any enhancement to instrument approach procedures.

PART 77 CIVIL AIRPORT IMAGINARY SURFACES

[Title 14 CFR \(Code of Federal Regulations\) Part 77 Safe, Efficient Use, and Preservation of the Navigable Airspace](#) is used to determine whether man-made or natural objects penetrate these “imaginary” three-dimensional airspace surfaces and become obstructions. Federal Aviation Regulation (FAR) Part 77 surfaces are the protective surfaces most often used to provide height restriction zoning protection around an airport. Sufficiently clear airspace is necessary for the safe and efficient use of aircraft arriving and departing an airport. The most demanding approach to a runway defines the Part 77 airspace standards. These airspace surfaces include the primary, approach, transitional, horizontal, and conical surfaces each with different standards. The slope of an airspace surface is defined as the horizontal distance traveled for every vertical foot (i.e. 50:1).

Of note are the primary surfaces which should be kept clear of non-essential objects above the runway centerline elevation. The approach surface extends upward and outward from the runway a slope defined as the horizontal distance traveled for every vertical foot. **Table 4-43** depicts the existing, future, and ultimate approach airspace surfaces for GFK:



Table 4-43 – Part 77 Approach Airspace Requirements

Runway End	Approach Standards	Part 77 Code	Inner Width*	Outer Width	Length	Slope
Existing						
17R	Non-Precision Other-Than-Utility As low as 1 mile	C	1,000'	3,500'	10,000'	34:1
35L	Precision Other-Than-Utility As low as ½ Mile	PIR	1,000'	16,000	50,000'	50:1/40:1
17L	Visual Utility	A(V)	250'	1,250'	5,000'	20:1
35R	Visual Utility	A(V)	250'	1,250'	5,000'	20:1
9L	Non-Precision Other-Than-Utility As low as 1 mile	C	500'	3,500'	10,000'	34:1
27R	Non-Precision Other-Than-Utility	C	500'	3,500'	10,000'	34:1
9R	Visual Utility	A(V)	250'	1,250'	5,000'	20:1
27L	Visual Utility	A(V)	250'	1,250'	5,000'	20:1
Future						
17R	Non-Precision Other-Than-Utility No lower than ¾ mile	D	1,000'	4,000'	10,000'	34:1
27R	Non-Precision Other-Than-Utility No lower than ¾ mile	D	1,000'	4,000'	10,000'	34:1
9L	Non-Precision Other-Than-Utility No lower than ¾ mile	D	1,000'	4,000'	10,000'	34:1
Ultimate						
17L	Non-Precision Utility As low as 1 mile	A(NP)	500'	2,000	5,000'	20:1
35R	Non-Precision Utility As low as 1 mile	A(NP)	500'	2,000	5,000'	20:1

Source: [Title 14 CFR Part 77](#), KLJ Analysis *Inner width is also the Primary Surface width driven by the most demanding approach to a runway. **Bold** indicates change from existing standard.

New development should be kept below the Part 77 airspace surface elevation. Airspace surfaces must clear public roads by 15 feet, interstate highways by 17 feet, railroads by 23 feet, and private roads by 10 feet or the height of the most critical vehicle.

Any existing, future, or ultimate Part 77 obstructions located around GFK that will be identified on the ALP for further action.

RUNWAY APPROACH/DEPARTURE SURFACES

FAA identifies sloping approach surfaces that must be cleared at an absolute minimum for safety for landing aircraft. These surfaces are identified in Table 3-2 of [FAA AC 150/5300-13A, Change 1](#). All objects must clear the surface for the applicable runway operational design standard to meet minimum aviation safety standards for a given runway landing threshold location. Approach airspace penetrations typically require the removal of the object, operational restrictions, or the runway landing threshold to be shifted or displaced down the runway.



The departure surface applies to instrument departures. It begins at the end of the takeoff distance available and extends upward and outward at a 40:1 slope. No new penetrations are allowed unless an FAA study has been completed and a determination of no hazard has been issued. Penetrations to the departure surface may require the obstacle to be published, or require mitigation including increasing the minimum aircraft climb rate or runway length operational restrictions. Per **Table 4-44**, the following approach/departure surface standards apply:

Table 4-44 – Approach/Departure Surface Requirements

Runway End(s)	Table 3-2 Row	Description	Slope
Existing			
17L, 35R, 9R, 27L	2	Approach end of runways expected to serve small airplanes with approach speeds of 50 knots or more (visual, day/night)	20:1
9L, 27R	4	Approach end of runways expecting to support instrument night operations, serving approach Category A and B aircraft only	20:1
17R	5	Approaches supporting instrument night operations in greater than Category B aircraft	20:1
35L	7	Instrument approaches having visibility minimums < ¾ statute mile	34:1
35L, 17R, 9L, 27R	8	Approach end of runways to accommodate approaches with vertical guidance	30:1
All	9	Departure runway ends for all instrument operations	40:1
Future			
17R, 9L, 27R	6	Approach end of runways expected to accommodate instrument approaches having visibility minimums greater than or equal to ¾ mile but less than 1 statute mile	20:1
Ultimate			
17L, 35R	4	Approach end of runways expected to support instrument night operations, serving approach Category A and B aircraft only	20:1
17L, 35R	8	Approach end of runways to accommodate approaches with vertical guidance	30:1

Source: [FAA AC 150/5300-13A, Change 1](#), KLJ Analysis

Note: Most critical row(s) shown. Only changes from existing shown in future.

All runway ends are available for instrument departures. There are penetrations to the existing Runway 9L, 27R, 35L and 35R instrument departure surfaces that are noted in FAA publications (see adjacent figure). All existing FAA approach surfaces are clear of obstructions.

Airspace surface obstructions and mitigation options for future runway configurations will be evaluated in **Chapter 5: Alternatives Analysis**. Mitigation options generally include obstruction removal, lighting/markings, declared distances and/or adjustment of the visual guidance slope indicator angle. Other long-term options include reconfiguring the runway or modifying design standards. New development should be clear of airspace surfaces.

TERMINAL INSTRUMENT PROCEDURES (TERPS)

The FAA has established standards to develop instrument procedures in the United States. [FAA Order 8260.3B, U.S. Standards for Terminal Instrument Procedures \(TERPS\)](#) and related orders outlines these complex standards to develop instrument procedures. Some critical obstruction clearance surface (OCS) standards are integrated into the FAA identified in Airport Design including many final approach

GRAND FORKS, ND GRAND FORKS INTL (GFK) TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES AMD T 2 09071 (FAA)

NOTE: **Rwy 9L**, tree 127' from DER, 451' left of centerline, 12' AGL/853' MSL. **Rwy 27R**, bush 38' from DER, 474' right of centerline, 5' AGL/844' MSL. **Rwy 35L**, obstruction light on DME 645' from DER, 198' left of centerline, 21' AGL/860' MSL. **Rwy 35R**, tree 1259' from DER, 521' right of centerline, 41' AGL/880' MSL. Tree 1655' from DER, 271' left of centerline, 45' AGL/884' MSL.



segments and the departure surface. Other inner airport OCS include the precision obstacle clearance surfaces and the missed approach surfaces. Some TERPS surfaces may even be more restrictive than Part 77 standards. Penetrations to TERPS surfaces result in higher weather minimums or operational restrictions.

The following GPS instrument approach procedure has higher than typical approach weather minimums, signifying an obstruction or several obstructions causing these higher minimums:

- RNAV(GPS) RWY 17R: 264' Height Above Touchdown (HAT) vs. 250' HAT Typical

A full TERPS study is not planned, however **coordination with FAA Flight Procedures Office is recommended to identify the critical obstruction within each instrument approach.** The instrument approach minimums to other runway ends are as low as possible for the current infrastructure, indicating there are no obstructions that cause any higher minimums.

Every three years the FAA will conduct a review of the most critical final approach “visual area” TERPS surfaces to verify compliance. There are no existing penetrations to the visual area surfaces at GFK.

ONE ENGINE INOPERATIVE (OEI) SURFACES

One Engine Inoperative (OEI) procedures are developed by air carriers to clear obstacles in situations where one engine becomes inoperative. OEI obstacle surfaces have shallow slopes to provide object clearance when aircraft climb performance is reduced because of engine power loss. Each airline develops OEI procedures. Critical obstructions effect the utility of the runway by these aircraft. The FAA had required a clear 62.5:1 sloped surface to be kept clear of obstacles from departure ends. FAA no longer requires the 62.5:1 OEI surface because of the large area covered, the scope of obstructions found and inability for airport sponsors to clear these areas.

In lieu of FAA developing a new surface, we recommend a standard 62.5:1 surface be used for future runway, airspace, and land use planning wherever possible.

OTHER DESIGN SURFACES

Other airport design airspace surfaces considered protect navigational aids and identify airport data to populate FAA databases.

Inner-Approach Obstacle Free Zones

Runway 35L has an existing approach lighting system. Thus, a clear inner-approach OFZ is necessary. The inner-approach OFZ is a 50:1 sloped surface begins 200 feet from the runway threshold and extends 200 feet beyond the last approach light (2,700 feet from runway end). **The existing Inner-Approach OFZ to Runway 35L is clear of all obstacles.**

Inner-Transitional Obstacle Free Zones

The inner-transitional OFZ airspace surface is required for future visibility minimums lower than $\frac{3}{4}$ mile along the sides of the ROFZ. Objects not necessary for airport operations, including aircraft tails cannot penetrate this surface. **Runway 17R/35L does not have existing penetrations to the Inner-Transitional OFZ.**

Precision Obstacle Free Zone (POFZ)

If a future precision instrument approach with minimums lower than $\frac{3}{4}$ mile is established there exists as POFZ which begins at the runway threshold as a flat surface 800 feet wide centered on the runway centerline and extending 200 feet to connect to the inner-approach OFZ. As with the OFZ, objects not necessary for airport operations including aircraft or vehicles on the ground cannot penetrate this surface. **Runway 35L has an existing Precision OFZ which is clear of obstacles.**

VISUAL AID SURFACES

Visual aids at an airport require clear Obstacle Clearance Surface (OCS) to provide sufficient guidance for pilots. These include approach lighting systems and visual guidance slope indicators. For a Precision



Approach Path Indicator (PAPI) system, a 31.29:1 sloped surface must be clear. The specific airspace standards for this and for approach lighting systems are defined in [FAA Order 6850.2B](#). After a cursory review, there are no known obstructions to visual aid surfaces at GFK.

FAA AERONAUTICAL SURVEYS

The FAA has implemented Aeronautical Survey requirements per [FAA AC 150/5300-18B: General Guidance and Specifications for Submission of Aeronautical Data to NGS: Field Data Collection and Geographic Information System \(GIS\) Standards](#). FAA airport survey requirements require obstruction data to be collected using assembled aerial imagery for the airport. This data is used in aeronautical publications and to develop instrument approach procedures.

An aeronautical survey is currently in progress with this planning effort as required by FAA. Imagery was acquired in September 2015. When safety-critical data is needed to update runway end data or enhance an instrument approach then a new aeronautical survey is required. All projects at primary FAR Part 139 certificated airports must comply with Airports GIS standards for all development projects.

Navigational Aids (NAVAIDs)

Airfield NAVAIDs are any ground or satellite based electronic or visual device to assist pilots with airport operations. They provide for the safe and efficient operations of aircraft on an airport or within the vicinity of an airport. The type of NAVAIDS required are determined by FAA guidance based on an airport's location, activity, and usage type.

AREA NAVIGATION

The FAA is updating the nation's air transportation infrastructure through the Next Generation Air Transportation System (NextGen) program. New procedures and technology are to be implemented to improve the efficiency and safety of the national air transportation system. By 2020, all aircraft in controlled airspace must be equipped with Automatic Dependent Surveillance-Broadcast (ADS-B) equipment, forming the foundation by moving from group radar and navigation aids to precise tracking using satellite signals. As aircraft are required to be equipped with ADS-B, a trend in future aviation operations suggests satellite-based equipment will become the new normal for pilots.

For area navigation (RNAV), satellite-based NAVAIDs will primarily be used for air navigation with ground-based NAVAIDs used for secondary purposes. Wide Area Augmentation System (WAAS) provides the framework for satellite-based navigation and approach procedures. GFK has satellite-based approaches for all air carrier runways.

The existing ground-based VOR system in the northwest portion of GFK has design standards that should be met to support continued operation. The high-altitude GFK VOR/DME is owned by the FAA. This facility is identified as a retained VOR in the FAA's national VOR minimum operational network.

Maintaining the existing VOR facility at GFK is recommended.

To support existing VOR operations, the ground profile within 1,000 feet of the facility should be flat or graded downward. The actual elevations appear to have positive grade changes. A clearance angle of 1.2 degrees for metal structures and 2.0 degrees for trees is required. There are no known obstacles. Avoidance of the VOR critical area is the reason the airport perimeter fence was constructed along the edge of County Highway 5 and 40th Avenue North.

RUNWAY APPROACH

Other NAVAIDs are developed specifically to provide "approach" navigation guidance, which assists aircraft in landing at a specific airport or runway. These NAVAIDs are electronic or visual in type. [FAA Order 6750.16D, Siting Criteria for Instrument Landing Systems](#) and [FAA Order 6850.2B, Visual Guidance Lighting Systems](#) defines the standards for establishing these systems.



Precision Approach Categories

There are three categories of precision instrument approaches systems - visibility minimums less than $\frac{3}{4}$ mile. Each category can support approaches in equipped aircraft with lower weather minimums. Each category also requires an increasing complexity of airport equipment as well as aircraft and flight crew certifications. Runway 35L has an existing precision approach. With a $\frac{1}{2}$ mile visibility and 200-foot decision height, the precision approach is classified as a Category I ILS (see Table 4-45).

Table 4-45 – Precision Approach Categories

Approach Category	Decision Height (ft.)	Runway Visual Range	Equivalent Visibility
Category I	200	2,400 or 1,800	$\frac{1}{2}$ mile or $\frac{3}{8}$ mile
Category II	100	1200	$\frac{1}{4}$ mile
Category III	100 -> 0	700 -> 0	$\frac{1}{4}$ mile -> 0

Source: [FAA Aeronautical Information Manual](#)

Instrument Landing System (ILS)

An ILS is a ground-based system that provides precision instrument guidance to aircraft approaching and landing on a runway. ILS approaches enable a safe landing in IMC with low cloud ceiling and/or visibility. Major components of ILS include the localizer antenna for horizontal guidance, glide slope antenna for vertical guidance and an approach lighting system. The localizer and glide slope require critical areas that are sufficiently graded and do not contain certain objects.

No new ILS systems are being installed nationwide. FAA's policy in [FAA Order 5100.38D](#), [AIP Handbook](#) states that the development of a GPS approach will be used instead of installation of a new CAT-I ILS at all locations where technically feasible. These approaches provide nearly the same equivalent capabilities. GFK should plan to utilize GPS technology for approach upgrades. This technology exists today with the existing approach procedures. Ultimately, the ground-based localizer and glideslope systems may eventually be replaced by precision GPS systems.

Visual Guidance Slope Indicator (VGSI)

A VGSI system provides visual descent guidance to aircraft on approach to landing. A Precision Approach Path Indicator (PAPI) system and a Visual Approach Slope Indicator (VASI) are two typical VGSI systems. They are installed on runway ends to enhance visual vertical guidance to the runway end. PAPI systems, a newer technology, consist of a single row of two to four lights. The two-light system is for non-jet runways and the four-light system is for jet-capable runways.

GFK currently has 4-box PAPI systems on Runway 9L, 17L, 17R, 35L, and 35R. Runway 9R/27L has a 2-box PAPI system and Runway 27R has a VASI system. VASI systems have been noted as an older and outdated VGSI system. In the future, **GFK should upgrade the existing VASI system on Runway 27R to a 4-box PAPI when the existing system reaches the end of its useful life.** All PAPIs should meet obstacle clearance requirements.

Runway End Identifier Lights (REIL)


REILs consist of high-intensity flashing white strobe lights located on the approach ends of runways to assist the pilot in early identification of the runway threshold. Additionally, these are typically installed on runways that are surrounded by a preponderance of other lights or if the runway lacks contrast with surrounding terrain. These are not installed with an approach lighting system.

GFK currently has two runway ends with REILs installed (17R and 27R). These REILs should be maintained through the long-term. **It is recommended a REIL be installed for Runway 9L and any other visual runway approach end that establishes a GPS approach in the future.** REILs are currently unidirectional, but omnidirectional could be acceptable as well. Unidirectional could be considered if circling approaches are common.



Approach Lighting System (ALS)

ALS help pilots transition from instrument flight to visual flight for landing. FAA encourages airport operators to consider an ALS to enhance the safety of an instrument approaches. An ALS installed on non-precision approach runways can help provide visibility credit for instrument approach minimums. A full ALS allows for cloud ceiling minimums below 250 feet. An upgraded ALS is also required for Category II ILS approach. There are various configurations, lighting types and complexities to these systems. The requirement for an airport runway end is dependent upon the type of precision approach and visibility minimums of the approach.

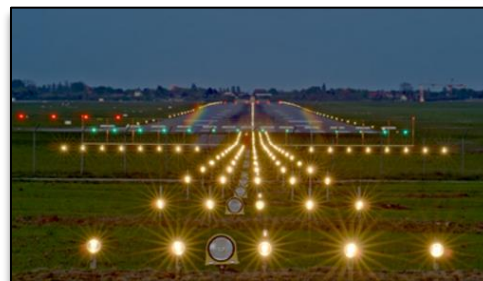

Typical Approach Lighting System (FAA)


Common types of ALS to consider at GFK include:

- **Omnidirectional Approach Lighting System (ODALS):** This basic ALS consists of seven omnidirectional sequenced strobe lights along runway approach centerline. The system is 1,500 feet in total length providing visual guidance to non-precision runways. GFK does not have an existing approach with an ODALS lighting system.
- **Medium-intensity Approach Lighting System with Sequencing Flashing Lights (MALSF):** This intermediate ALS consists of seven rows of lights, three flashing lights and a row of steady burning green lights prior to runway threshold. The system is 1,400 feet in total length providing visual guidance to non-precision runways. GFK does not have an existing approach with an MALSF lighting system.
- **Medium-intensity Approach Lighting System with Runway Alignment Indicator Lights (MALSR):** This full ALS consists of seven rows of lights, five flashing lights and a row of steady burning green lights prior to runway threshold. The system is 2,400 feet in total length. This is required for a Category I precision instrument approach. The Runway 35L approach at GFK has a MALSR lighting system.
- **Approach Lighting System with Sequenced Flashing Lights (ALSF):** This full ALS is a more complex lighting system required for Category II precision approach. The system includes a green threshold bar, 15 total rows of white lights, nine side rows bars along centerline, and sequenced flashing white lights totaling 2,400 feet in length. GFK does not have an existing approach with an ALSF lighting system.

See **Exhibit 4-50** for example ALS configurations to consider at GFK.



Exhibit 4-46 – ALS Configurations

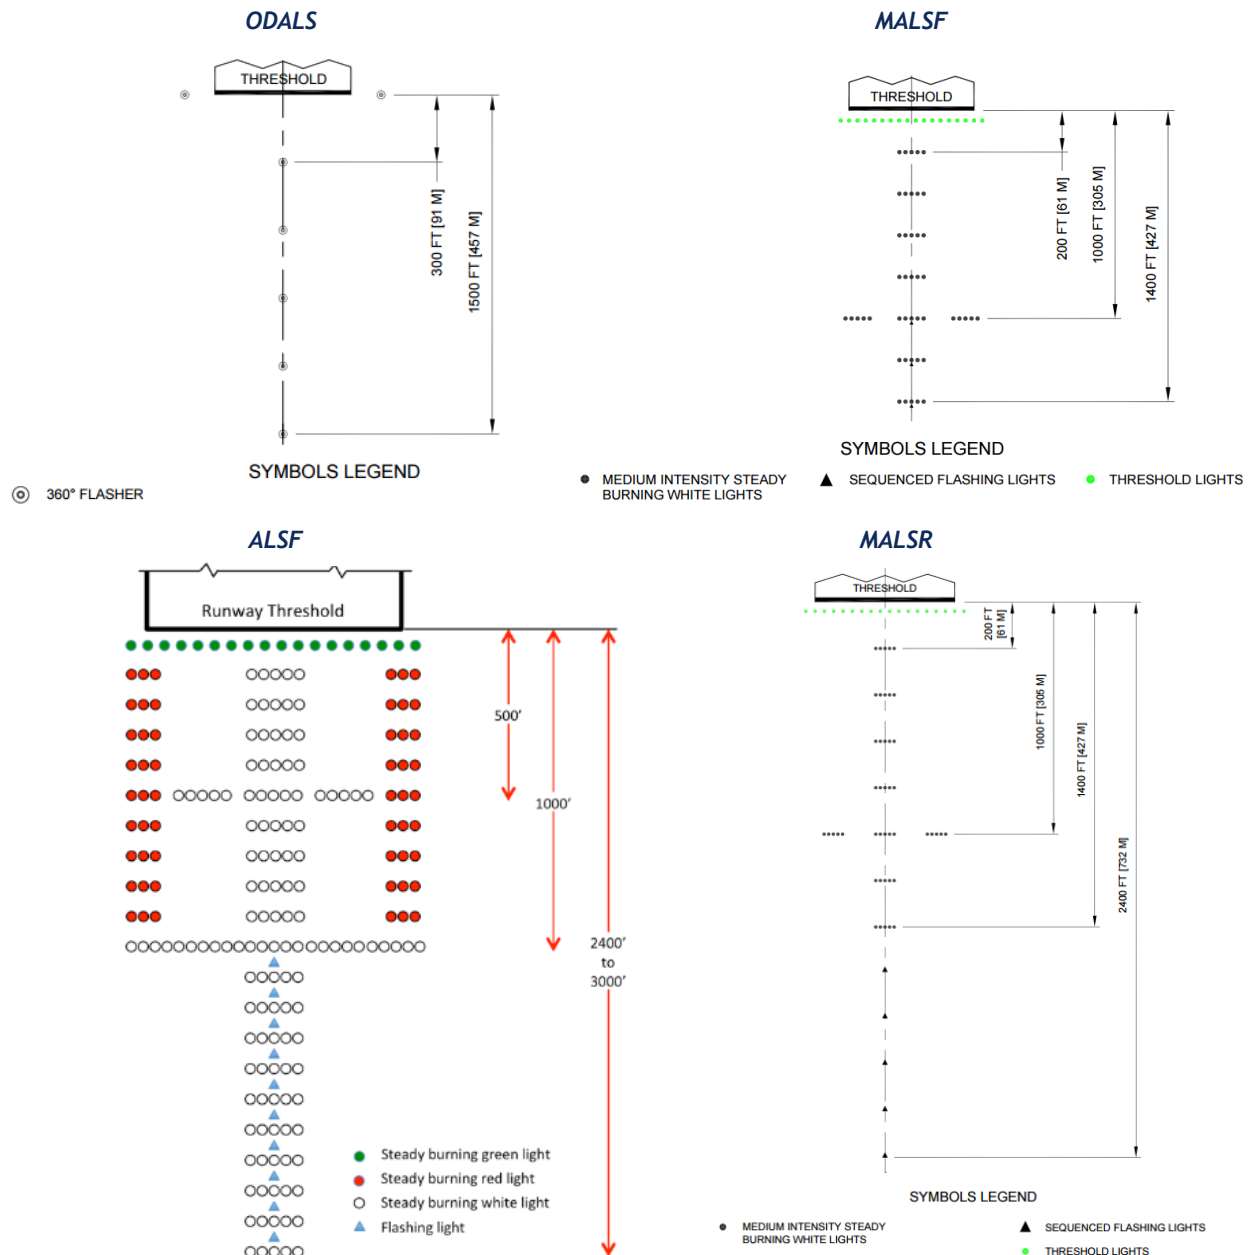

Source: [FAA AC 150/5300-13A, Change 1](#), [FAA Order 6850.2B](#), [Visual Guidance Lighting Systems](#)

To achieve a CAT-II approach with 1600 RVR (1/4 mile), an ALSF-2 approach lighting system is recommended for Runway 35L. In conjunction with touchdown zone lighting, runway centerline lighting and implementing an RVR system, 1/4 mile visibility could be achieved and would increase the usability of the airport during poor weather conditions.

If an ALS is required to achieve 3/4 mile visibility, it is recommended an MALSF system be planned for Runway 17R and 9L approaches. This ALS may assist the airport in achieving down to 3/4 mile visibility approaches and would increase usability of the airfield during poor weather conditions when wind is blowing from a southerly direction. Presently, the lowest minimums are not lower than 1 mile with vertical guidance.



AIRFIELD VISUAL

Visual NAVAIDs provide airport users with visual references within the airport environment. They consist of lighting, signage, and pavement markings on an airport. Visual NAVAIDs are necessary airport facility components on the airfield, promoting enhancing situational awareness, operational capability, and safety. [FAA AC 150/5340-30, Design and Installation of Airport Visual Aids](#) defines the standards for these systems.

Airport Beacon

The airport beacon serves as the airport identification light so approaching pilots can identify the airport location from sunset to sunrise. The airport beacon's location at GFK adequately serves the airport without known obstructions to its line of sight. The minimum light beam angle is 2 degrees.

Runway Lighting

Runway edge lights are placed off the edge of the runway surface to help pilots define the edges and end of the runway during night and low visibility conditions. Runway lights are classified according to the intensity of light they produce including high intensity (HIRL), medium intensity (MIRL) and low intensity (LIRL).

Except for Runway 17R/35L, the remaining three (3) runways are equipped with Medium Intensity Runway Lighting (MIRL) systems. Runway 17R/35L is equipped with a High Intensity Runway Lighting System (HIRL). Based on discussions with the sponsor, the existing HIRL system on Runway 17R-35L has reached the end of its useful life. Installed in 2001 when the runway was rehabilitated, it has currently become unreliable to the point where failures have become common. Testing performed in August 2015 supported the conclusion that the system has deteriorated. **A HIRL replacement on Runway 17R-35L is recommended in the future.**

Other runway lights are installed at airports to facilitate the safe and efficient operation of aircraft. These include runway centerline lighting (RCL), touchdown zone lighting (TDZL), land and hold short lighting systems (LAHSO) and runway status light (RWSL). Runway 17R-35L is equipped with some in-pavement runway edge lights. **In-pavement runway centerline lighting for Runway 17R-35L and touchdown zone lighting for Runway 35L is recommended to help the airport achieve 1800 RVR minimums in the future.**

Taxiway Lighting

Taxiway edge lighting delineates the taxiway and apron edges. The FAA standard taxiway edge lighting system is Medium Intensity Taxiway Lights (MITL).

Except for Runway 17R-35L's Taxiway system, the entire taxiway system at GFK operates with Medium Intensity Taxiway Lighting (MITL). Runway 17R-35L's taxiway Alpha (A) and associated entrance taxiways are equipped with High Intensity Taxiway Lighting (HITL). **It is recommended the airport continue to maintain the MITL system on the airfield, as well as the HITL system on Taxiway A.**

Lighting Activation

Local Air Traffic Control manages lighting when the tower is operational. When the tower is not operational, lighting is pilot controlled through Common Traffic Advisory Frequency (CTAF). There are no known issues with how airfield lighting is activated at GFK.

AIRFIELD SIGNAGE

Airfield signage is essential for the safe and efficient operation of aircraft and ground vehicles on the airport movement area. Common signs include mandatory instruction signs, location signs, boundary signs, direction/destination signs, information signs and distance remaining signs.

GFK has mandatory, locational, and directional signage on the airfield. All types of signage are lighted and marked in accordance with [FAA AC 150/5340-18F, Standards for Airport Sign Systems](#). These signs are maintained by the airport maintenance staff and are in fair condition.



Airports certificated under 14 CFR Part 139 such as GFK must have a sign plan developed and implemented to identify taxi routes and holding positions. This plan must be consistent with [FAA Advisory Circular 150/5340-18F](#). This plan should be maintained to meet current standards and operating procedures.

PAVEMENT MARKINGS

Pavement markings help airport users visually identify important features on the airfield. FAA has defined numerous different pavement markings to promote safety and situational awareness as defined by [FAA AC 150/5340-1, Standards for Airport Markings](#).

Runway

Runway pavement markings are white in color. The type and complexity of the markings are determined by the approach threshold category to the runway end. The minimum required runway markings for a standard runway are as follows:

- Visual (landing designator, centerline)
- Non-Precision (landing designator, centerline, threshold)
- Precision (landing designator, centerline, threshold, aiming point, touchdown zone, edge)

The following recommendations are made for GFK runway markings:

- **Maintain Runway 17R-35L precision instrument markings.**
- **Maintain Runway 9L-27R non-precision instrument markings**
- **Maintain Runway 9R-27L visual runway markings**
- **Upgrade Runways 17L-35R to non-precision runway markings in conjunction with the ultimate recommendation of adding RNAV GPS approaches.**

Taxiway/Taxilane

Taxiway and taxilane markings are important for directional guidance for taxiing aircraft and ground vehicles. Common taxiway and apron markings include taxiway/taxiway centerline, edge, and non-movement area boundary. Enhanced taxiway markings are required along taxiway centerlines that lead to runway entrances. Taxiway/taxilane centerline markings should be used throughout to define a safe centerline with object clearance. Taxiway/taxilane edge markings should be used to delineate the taxiway edge from the shoulder, apron, or some other contiguous paved surface. The non-movement area boundary should be marked appropriately per ATCT line of sight requirements.

GFK's taxiway/taxilane markings are maintained by airport maintenance staff and are in good condition. They include taxiway/taxilane centerlines, enhanced centerlines, movement/non-movement markings, runway hold-lines, and painted holding position signs (markings on pavement) on all runway hold lines and applicable taxiways/taxilanes. **The movement areas boundaries should be adjusted on the taxiways to reflect the new ATCT line-of-sight in the future.**

Holding Position

Holding position markings are a visual reference to prevent aircraft and vehicles from entering critical areas such as an active runway environment. These markings consist on yellow bars and dashes on a black background.

Accounting for altitude adjustments, the required holding position setbacks for runways at GFK include 258 feet from runway centerline for 17R-35L, 208 feet from runway centerline for Runway 9L-27R, and 133 feet from runway centerline for both Runway 17L-35R and 9R-27L. All four (4) runways meet FAA minimum design standard regarding holding position marking requirement. Actual runway-to-hold line marking distances include 265 feet for Runway 17R-35L, and 208 feet for runways 9L-27R, 17L-35R, and 9R-27L.



METEOROLOGICAL

Aircraft operating to and from an airport require meteorological aids to provide current weather data. Weather information helps pilots make informed decision about flight operations. Airports have various aids installed providing local weather information.

Surface Weather Observation

GFK has an existing FAA-owned Automated Surface Observation System (ASOS) located west of Runway 17R/35L and is anticipated to provide adequate weather service through this planning period. This system provides weather updates every 15 minutes, or updates when significant weather changes occur.

Wind Cone(s)

GFK has an existing primary lighted wind cone west of Runway 17R/35L. There are also a smaller “secondary” wind cones located near each runway end. Wind cones allow pilots to instantly obtain real-time wind direction and speed information, which allows them to make decisions for aircraft operations during takeoff or landing.

Other

Other meteorological aids can include electrical systems such as Runway Visual Range (RVR) systems. RVR systems aid in aircraft arrivals and departures during poor visibility conditions. An FAA-owned RVR system is installed at the touchdown zone of Runway 35L. The system is sufficient for current CAT-I operations. **If GFK were to implement RVR-based minimums such as a CAT-II approach, an RVR system located at the touchdown, midfield and rollout points would be required.**

COMMUNICATIONS & ATC

The ability for pilots to communicate with other pilots and air traffic control (ATC) is critical for the safety and efficiency of the overall air transportation system.

GFK operates Class D airspace with an Air Traffic Control Tower (ATCT) facility located in the northeast corner of the landside facilities on the airfield. Their normal operating hours are 6:00AM until 11:30PM. Outside of these towered hours, pilots navigate in and out of GFK through Class E airspace and “self-announce” their position and intentions on the CTAF frequency. ATCT operating hours should be adjusted accordingly for the expected volume of traffic.

The current GFK ATCT was constructed in 1973. The tower cab is approximately 420 SF in size and cab eye level is 933 feet Mean Sea Level (MSL) or 92 feet Above Ground Level (AGL). It is imperative that personnel in the tower can see the airfield under its control. In November of 2015, the FAA conducted a “Quick Look Evaluation” to evaluate the tower cab for any deficiencies. Because of the study, no large-scale blockages were found from the current tower location in relation to all movement areas on the airfield. Partial, minor blockages exist where Charlie Apron meets Taxiway C1, and Taxiway A near Taxiway F. No detailed ATCT line-of-sight study was conducted in this Master Plan, however, future development was reviewed to identify potential new line-of-site blockages.

The tower needs replacement; a FAA siting study has been initiated with a FAA Airways Facilities Tower Integration Laboratory (AFTIL). When a replacement ATCT is planned by FAA, [FAA Order 6480.4A, Airport Traffic Control Tower Siting Process](#) identifies the criteria used for considering a new tower location:

1. Visual performance
2. TERPS airspace surfaces
3. FAR Part 77 airspace
4. Sunlight/daylight
5. Airport/background lighting
6. Atmospheric Conditions
7. Industrial Municipal Discharge
8. Site Access



9. Interior Physical Barriers
10. Security

A dozen proposed sites were analyzed with three preferred sites identified at the AFTIL-1 tower siting study held in July 2017. Each site will require approximate 2-5 acres of land for support facilities. The three sites include:

- Site 1: Located southeast of the ARFF/SRE complex; 198' AGL / 1039' MSL
- Site 2B: Located west of the Hangar #39 and the airport access road; 197' AGL / 1038' MSL
- Site 7: Located at the old Flight Service Station; 198' AGL / 1042' MSL

Site 2B impacts the minimums to the RWY 35L LOC approach by increasing visibility minimums to $\frac{3}{4}$ mile. **This study will protect the ATCT line-of-site and provide development space for the three (3) preliminary new tower sites.**

Taxiways

Taxiways provide for the safe and efficient movement of aircraft between the runway and other operational areas of the airport. The taxiway system should provide critical links to airside infrastructure, increase capacity, and reduce the risk of an incursion with traffic on the runway. The taxiway system should meet the standards design requirements identified in [FAA AC 150/5300-13A, Change 1](#).


SYSTEM DESIGN

FAA has placed a renewed emphasis on taxiway design in their updated airport design standards. Fundamental elements help develop and efficient system to meet demands, reduce pilot confusion and enhance safety. Considerations include:

- Design taxiways to meet FAA design standards for existing and future users considering expandability of airport facilities.
- Design taxiway intersections so the cockpit is over the centerline with a sufficient taxiway edge safety margin.
- Simplify taxiway intersections to reduce pilot confusion using the three-node concept, where a pilot has no more than three choices at an intersection.
- Eliminate “hot spots” identified by the FAA Runway Safety Action Team where enhanced pilot awareness is encouraged.
- Minimize the number of runway crossings and avoid direct access from the apron to the runway.
- Eliminate aligned taxiways whose centerline coincides with a runway centerline.
- Other considerations include avoiding wide expanses of pavement and avoiding “high energy intersections” near the middle third of a runway.

In 2015, GFK took measures to relocate Taxiway Delta to correct a “hot spot” identified by FAA. There are two remaining “hot spots” noted in the area. The first hotspot is at the intersection of Runway 9L-27R and Taxiway Alpha. This hotspot pertains to north flow traffic on Taxiway Alpha and crossing Runway 9L-27R. The second hotspot is in the same area, and is located on Taxiway Bravo when crossing Runway 17R-35L while heading west on Taxiway Bravo. This hotspot was identified because of its tendency to have an increased risk of runway incursions.

Pertaining to these hotspots, there are no known design flaws to the taxiway system. This area is also known to be used by the University of North Dakota for pre-flight aircraft operations. It is possible that student pilot error could be a contributing factor to an increase of runway incursions in

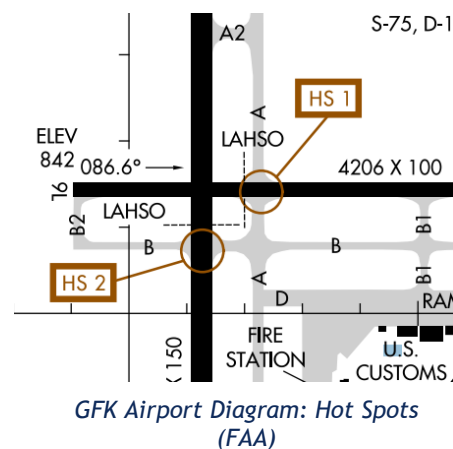



this area. **No taxiway system configuration changes are recommended at GFK to resolve “hot spots”.**

In general, the entire taxiway/taxilane layout at GFK was constructed with taxiways perpendicular to each other. All intersections on the airfield intersect at a 90-degree angle and is most desirable for aircraft safety and pilot awareness of other moving objects on the airfield (vehicles, other aircraft, etc.). Perpendicular intersections provide optimal visibility.

Various taxiways provide “direct access” from the apron to the runway environment. **Ultimately, direct access taxiways should be reconfigured to require a turn from the apron onto the parallel taxiway.**

DESIGN STANDARDS

FAA identifies the design requirements for taxiways. The design standards vary based on individual aircraft geometric and landing gear characteristics. The Taxiway Design Group (TDG) and Airplane Design Group (ADG) identified for the design aircraft using a taxiway. In addition to taxiway/taxiway pavement width, some of the safety standards include:

- **Taxiway/Taxilane Safety Area (TSA):** A defined graded and drained surface alongside the taxiway prepared or suitable for reducing the risk of damage to an aircraft deviating from the taxiway. The surface should be suitable to support equipment during dry conditions
- **Taxiway Edge Safety Margin (TESM):** The minimum acceptable distance between the outside of the airplane wheels and the pavement edge.
- **Taxiway/Taxilane Object Free Area (TOFA):** An area centered on the centerline to provide enhanced the safety for taxiing aircraft by prohibiting parked aircraft and above ground objects except for those objects that need to be in the OFA for aircraft ground maneuvering purposes.

Other design standards include taxiway shoulder width to prevent jet blast soil erosion or debris ingestion for jet engines, and required separation distances to other taxiways/taxilanes. **Table 4-47** and **Table 4-48** describes the specific FAA taxiway design standards for various ADG and TDG design aircraft, respectively.

Table 4-47 – FAA Taxiway Design Standards Matrix (ADG)

Design Standard	Airplane Design Group (ADG)			
	ADG-I	ADG-II	ADG-III	ADG-IV
Taxiway Safety Area	49 feet	79 feet	118 feet	171 feet
Taxiway Object Free Area	89 feet	131 feet	186 feet	259 feet
Taxilane Object Free Area	79 feet	115 feet	162 feet	225 feet
Taxiway Centerline to Parallel Taxiway Centerline	70 feet	105 feet	152 feet	215 feet
Taxilane Centerline to Parallel Taxilane Centerline	44.5 feet	65.5 feet	93 feet	129.5 feet
Taxiway Centerline to Fixed or Movable Object	64 feet	97 feet	140 feet	198 feet
Taxilane Centerline to Fixed or Movable Object	39.5 feet	57.5 feet	81 feet	112.5 feet
Taxiway Wingtip Clearance	20 feet	26 feet	34 feet	44 feet
Taxilane Wingtip Clearance	15 feet	18 feet	27 feet	27 feet
Taxiway A “Alpha”			X	X
Taxiway B “Bravo”		X	X	
Taxiway C “Charlie”		X		
Taxiway D “Delta”			X	X
Taxiway E “Echo”	X			
Taxiway F “Foxtrot”			X	X
Taxiway G “Golf”		X		
Taxiway S “Sierra”	X			



Design Standard	Airplane Design Group (ADG)			
	ADG-I	ADG-II	ADG-III	ADG-IV
Taxiway U “Uniform”		X		
Alpha Apron (Taxilanes)	X	X		
Bravo Apron (Taxilanes)	X			
Charlie Apron (Taxilanes)	X			
Air Carrier Apron (Taxilanes)			X	

Source: [FAA AC 150/5300-13A, Change 1](#), KLJ Analysis

NOTE: Taxiways include respective entrance taxiways to runways; **Green cell** indicates planned change in future design standard

Table 4-48 – FAA Taxiway Design Standards Matrix (TDG)

Design Standard	Airplane Design Group (TDG)			
	TDG-1A	TDG-2	TDG-3/4	TDG-5
Taxiway Width	25 feet	35 feet	50 feet	75 feet
Taxiway Edge Safety Margin (TESM)	5 feet	7.5 feet	10 feet	15 feet
Taxiway Shoulder Width	10 feet	15 feet	20 feet	30 feet
Crossover Taxiway Separation for Reverse Turns (Minimum)	70 feet	162 feet	162 feet	240 feet
Centerline Turn Radius (90 degrees)	35 feet	81 feet	81 feet	120 feet
Taxiway A “Alpha”			X	X
Taxiway B “Bravo”			X	
Taxiway C “Charlie”		X		
Taxiway D “Delta”			X	X
Taxiway E “Echo”	X			
Taxiway F “Foxtrot”			X	X
Taxiway G “Golf”		X	X	
Taxiway S “Sierra”	X			
Taxiway U “Uniform”		X		
Alpha Apron (Taxilanes)	X	X		
Bravo Apron (Taxilanes)	X			
Charlie Apron (Taxilanes)	X			
Air Carrier Apron (Taxilanes)			X	X

Source: [FAA AC 150/5300-13A, Change 1](#), KLJ Analysis

NOTE: Taxiways include respective entrance taxiways to runways

Green cell indicates planned change in future design standard

The existing airfield conditions has all parallel taxiways setback from their respective runway centerlines at 400 feet. This distance meets FAA design standard for Taxiway A and exceeds design standard for B, C, and S parallel taxiways.

The following are noted deficiencies to taxiway design standards with recommended actions evaluated in **Chapter 5: Alternatives Analysis**:

- **Taxiways A3, A4, A5, B1, C1:**
 - **Deficiency:** Taxiway configuration provides direct access from the aircraft parking apron to the runway. Taxiways should be configured to require aircraft to make a 90 degree turn prior to entering the runway environment.
 - **Action Plan:** It is recommended the taxiway connections between the runway and apron be reconfigured to meet FAA standards when pavement is due for reconstruction.



The following are noted deficiencies to taxiway design standards:

- **West General Aviation Hangar Area**
 - Deficiency: The northernmost east-west taxiway does not meet ADG-I TOFA standards (30 feet actual, 39.5 feet required) due to an electrical box. This same taxiway does not meet TDG-1A standard pavement width (24 feet actual, 25 feet required).
 - Action Plan: As much of the infrastructure has exceeded its useful life and is failing, it is recommended the entire West General Aviation Hangar area be reconstructed and reconfigured to meet minimum design standards for the aircraft using this area.
- **West General Aviation Hangar Area:**
 - Deficiency: The easternmost north-south taxiway does not meet ADG-II TOFA standards (50 feet actual, 57.5 feet required) due to keycard reader post and fence. The fleet mix of aircraft hangared in this area vary from ADG-I and ADG-II.
 - Action Plan: As much of the infrastructure has exceeded its useful life and is failing, it is recommended the entire West General Aviation Hangar area be reconstructed and reconfigured to meet minimum design standards for the aircraft using this area.
- **Alpha Apron:**
 - Deficiency: Several north-south taxiway does not meet ADG-II TOFA standards (45 feet actual, 57.5 feet required) from parked aircraft.
 - Action Plan: It is recommended the aircraft parking positions/tie-downs and taxiway centerlines be restriped to meet standards.
- **Bravo/Charlie Apron:**
 - Deficiency: Multiple taxiways do not meet ADG-I TOFA standards (33 feet actual, 39.5 feet required) from actual parked aircraft when accounting for the aircraft nose. The tie-down to tie-down separation is 80 feet.
 - Action Plan: It is recommended the aircraft parking positions/tie-downs and taxiway centerlines be restriped to meet standards.

Figure 4-1 depicts the existing airfield design standards, deficiencies and key facility needs.

FAA taxiway fillet geometric design standards changed in 2012 with [FAA AC 150/5300-13A](#). These standards should be incorporated at GFK during taxiway reconstruction or new construction.

ENTRANCE/EXIT TAXIWAYS

Entrance taxiways provide access to the runway ends for departures. Exit taxiways serve to achieve an efficient flow of traffic to reduce runway occupancy time and increase runway capacity. These taxiways are located along the runway in ideal aircraft deceleration and stop locations. High speed taxiways allow aircraft to exit a runway without having to decelerate to typical taxiway speed. Guidance from [FAA AC 150/5300-13A, Change 1](#) and [FAA AC 150/5060-5, Airport Capacity and Delay](#) was used for this analysis.

Entrance taxiways should always be oriented 90 degrees to runway centerline to enhance visibility of runway operations. The outer edge of entrance taxiways at runway ends should also be curved. Entrance taxiways at GFK meet ADG standards throughout the airfield. Fillets on the airfield were constructed based on a previous FAA standard. Although these meet aircraft Taxiway Edge Safety Margin (TESM) requirements, fillets are not designed to typical TDG minimum requirements. It is recommended, when pavements have reached the end of their useful life, that fillets, lead-ins, and radii be reconstructed to meet current FAA standards.

Exit taxiways should be aligned at 90 degrees (ideal) or 30 degrees for high-speed exit taxiways. Exit taxiways should be located along the runway in ideal locations to capture landing traffic to reduce runway occupancy times. The existing exit taxiway locations and configurations at GFK are deemed sufficient (see [Table 4-49](#)). Exit taxiways at GFK meet ADG standards throughout the airfield. As with entrance taxiways, fillets at GFK should be reconfigured to meet updated FAA standards when reconstructed.



The FAA recommends capacity enhancements when the peak hourly runway operations reach 30. Although runways exceed 30 operations per hour, no exit taxiways enhancements are recommended due to the slower aircraft approach speed of flight training aircraft. All taxiway exit locations and configurations appear to be sufficient for all aircraft types to minimize runway occupancy time.

BYPASS TAXIWAYS & HOLDING BAYS

Runway departure delays can be caused by aircraft awaiting departure clearance or completing pre-flight checks. Bypass taxiways and holding bays provide the flexibility to allow runway use when an aircraft is not ready for takeoff and would otherwise block the taxiway. Bypass taxiways provide a secondary access to runways, whereas holding bays provide space for aircraft away from the taxiway environment. Both bypass taxiways and holding bays improve capacity and overall flow.

The FAA recommends capacity enhancements when the peak hourly runway operations reach 30, which GFK has already exceeds. Capacity enhancements can include holding bays and bypass taxiways. These improvements would especially help an airport like GFK that has a high-volume of flight training traffic reduce ground delays.

Currently, GFK operates with designated aircraft run-up areas throughout the airfield. Primarily, western-bound UND traffic completes aircraft run-up/checklist operations along Taxiway Delta directly east of the Alpha/Bravo taxiway intersection. East-bound UND traffic typically completes run-ups either at the intersection of Charlie and Bravo taxiways, or near the Runway 35R departure end. These run-up areas along taxiways can cause congestion as no bypass capability exists. Constructing holding bays with adequate bypass capability at the end of each runway end would help relieve this issue.

It is recommended the airport explore options to add holding bays or bypass taxiways to each of the runway ends. It was expressed by Air Traffic Control that holding bays at each runway end or by the Charlie Apron would help the flow of traffic and the sequencing of aircraft. If one aircraft behind another is ready for departure, it would be much easier to clear that aircraft from the holding bay and open the traffic flow, rather than a bypass taxiway where the flow of traffic is limited to one aircraft at a time.

Table 4-49 – Exit Taxiway Utilization Percentages

Exit	Type	Distance from Threshold	Wet Runway				Dry Runway			
			S	T	L	H	S	T	L	H
Runway 17R										
Taxiway A2	Right Angle	1,400 feet	23	0	0	0	39	0	0	0
Taxiway B	Right Angle	2,900 feet	96	10	0	0	100	39	0	0
Taxiway A3	Right Angle	4,010 feet	100	97	4	0	100	100	24	2
Taxiway A4	Right Angle	5,265 feet	100	100	27	0	100	100	75	24
Taxiway A5	Right Angle	7,350 feet	100	100	97	84	100	100	100	100
Runway 35L										
Taxiway A4	Right Angle	2,085 feet	84	1	0	0	99	10	0	0
Taxiway A3	Right Angle	3,340 feet	99	41	0	0	100	81	2	0
Taxiway B	Right Angle	4,450 feet	100	97	4	0	100	100	24	2
Taxiway A2	Right Angle	5,950 feet	100	100	48	10	100	100	92	71
Taxiway A1	Right Angle	7,350 feet	100	100	97	84	100	100	100	100
Runway 17L										
Taxiway C1	Right Angle	510 feet	0	0	0	0	0	0	0	0
Taxiway C2	Right Angle	2,005 feet	84	1	0	0	99	10	0	0
Taxiway C3	Right Angle	3,900 feet	100	80	1	0	100	98	8	0



Exit	Type	Distance from Threshold	Wet Runway				Dry Runway			
			S	T	L	H	S	T	L	H
Runway 35R										
Taxiway C2	Right Angle	1,900 feet	60	0	0	0	84	1	0	0
Taxiway C1	Right Angle	3,390 feet	99	41	0	0	100	81	2	0
Taxiway B	Right Angle	3,900 feet	100	80	1	0	100	98	8	0
Runway 9L										
Taxiway A	Right Angle	1,300 feet	23	0	0	0	39	0	0	0
Taxiway B1	Right Angle	2,475 feet	84	1	0	0	99	10	0	0
Taxiway C	Right Angle	4,200 feet	100	97	4	0	100	100	24	2
Runway 27R										
Taxiway B1	Right Angle	1,725 feet	60	0	0	0	84	1	0	0
Taxiway A	Right Angle	2,900 feet	96	10	0	0	100	39	0	0
Taxiway B2	Right Angle	4,200 feet	100	97	4	0	100	100	24	2
Runway 9R										
Taxiway S2	Right Angle	1,120 feet	23	0	0	0	39	0	0	0
Taxiway S1	Right Angle	3,330 feet	99	41	0	0	100	81	2	0
Runway 27L										
Taxiway S2	Right Angle	2,180 feet	84	1	0	0	99	10	0	0
Taxiway E	Right Angle	3,330 feet	99	41	0	0	100	81	2	0

S = Small, single engine, 12,500 lbs. or less; T = Small, twin engine, 12,500 lbs. or less;

L = Large, 12,500 lbs. to 300,000 lbs.; H = Heavy, 300,000 lbs.

Source: [FAA AC 150/5300-13A, Change 1](#), KLJ Analysis

PAVEMENT CONDITION & STRENGTH

A summary of the taxiway pavement condition with recommendations is in **Table 4-50**:

Table 4-50 – Taxiway Pavement Condition & Recommendations

Taxiway ID	Pavement Condition Index (PCI)		Action Plan (Lowest PCI)		
	Highest PCI	Lowest PCI	0-5 Years	6-10 Years	11-20 Years
Taxiway A	100	72	Maintain	Major Rehab.	Maintain
Taxiway B	100	12	Reconstruct	Maintain	Maintain
Taxiway C	92	57	Maintain	Major Rehab.	Maintain
Taxiway D	100		Maintain	Maintain	Maintain
Taxiway E	98		Maintain	Maintain	Maintain
Taxiway F	95		Maintain	Maintain	Maintain
Taxiway G	74		Maintain	Maintain	Major Rehab.
Taxiway S	98	95	Maintain	Maintain	Maintain
Taxiway U	83	49	Reconstruct	Maintain	Maintain

Source: *North Dakota Aeronautics Commission Pavement Condition Assessment (2015)*, KLJ Analysis

Figure 4-51 provides a graphical overview of the GFK taxiway designators.

The pavement strength of the taxiways serving air carrier runways was also reviewed with results in **Table 4-52**. Portions of Taxiway A1, A2, A3, A4 and A5 have a calculated PCN as low as 41. Taxiway A calculated PCN ranges from 43 to 97. The lowest pavement strength is found in a 350' x 75' section near Taxiway A5. **Ultimate strengthening of portions of Taxiway A is recommended to accommodate regular use of the future design aircraft (ACN: 51) as part of the fleet mix for Runway 17R-35L.** Further engineering analysis is recommended to determine if the future design aircraft fleet can reasonably be accommodated on the existing taxiway.



Taxiway B (except for connector at Runway 17L) and Runway 9L-27R are calculated to have the same calculated PCN of 28. Any upgrade in runway pavement strength should also be completed to the associated taxiway into the future. **Strengthening Taxiway B is recommended to accommodate the future design aircraft (ACN: 51) as part of the fleet mix for Runway 9L-27R.** Further engineering analysis is recommended.

Figure 4-51 – GFK Airfield Map



Source: FAA Airport Diagrams (GFK)



Table 4-52 – Taxiway Pavement Strength Requirements

Taxiway (Runway)	Existing Calculated Runway		Existing Calculated Taxiway	
	Capacity	PCN	Capacity	PCN
Taxiway A (17R-35L)	101,000 (SW)	39/R/B/W/T	106,000 (SW)	41/R/B/W/T
	134,000 (DW)		142,000 (DW)	
	216,000 (DTW)		225,000 (DTW)	
Taxiway B (9L-27R)	77,000 (SW)	28/R/C/W/T	77,000 (SW)	28/R/C/W/T
	95,000 (SW)		95,000 (SW)	
	167,000 (STW)		167,000 (STW)	

Source: KLJ Analysis

Taxiways should generally be designed to accommodate the design aircraft to serve that area. At GFK these include:

- Taxiways A, D, F: 172,000 pounds (DW), ACN: 51 - Primary Air Carrier
- Taxiway B: 172,000 pounds (DW), ACN: 51 - Secondary Air Carrier
- Taxiway G: 60,000 pounds (DW) - General Aviation
- Taxiway C, E, S, U: 12,500 pounds (SW) - Small Aircraft

Airside Data Summary

The following tables provide summary data of the facility requirements and recommendations associated with each of the runways at GFK through the planning period(s) identified in this Master Plan study:

- **Table 4-53: Runway 17R-35L Design Standard Matrix**
- **Table 4-54: Runway 17L-35R Design Standard Matrix**
- **Table 4-55: Runway 9L-27R Design Standard Matrix**
- **Table 4-56: Runway 9R-27L Design Standard Matrix**



Table 4-53 – Runway 17R-35L Design Standard Matrix

Design Standard	Actual Condition	Facility Requirement or Recommendation		
		Existing	Future	Ultimate
Planning Activity Level (PAL)	-	Base	PAL 1	PAL 4
Runway Identification	17R-35L	18R-36L	18R-36L	18R-36L
Runway Classification	Other-Than-Utility	Other-Than-Utility	Other-Than-Utility	Other-Than-Utility
Aircraft Classification	Large Aircraft	Large Aircraft	Large Aircraft	Large Aircraft
Runway Design Code (RDC)	D-IV-5000 (17R) D-IV-2400 (35L)	D-IV-5000 (17R) D-IV-2400 (35L)	C-III-4000 (17R) C-III-2400 (35L)	C-III-4000 (17R) C-III-1600 (35L)
Approach Reference Code (APRC)	D-IV-5000 (17R) D-V-5000 (17R) D-IV-2400 (35L) D-V-2400 (35L)	D-IV-5000 (17R) D-V-5000 (17R) D-IV-2400 (35L) D-V-2400 (35L)	D-IV-4000 (17R) D-V-4000 (17R) D-IV-2400 (35L) D-V-2400 (35L)	D-IV-4000 (17R) D-V-4000 (17R) D-IV-1600 (35L) D-V-2400 (35L)
Departure Reference Code (DPRC)	D-IV (Both) D-V (Both)	D-IV (Both) D-V (Both)	D-IV (Both) D-V (Both)	D-IV (Both) D-V (Both)
Pavement Strength (Wheel Loading)	216,000 (DTW)	378,500 (DTW)	172,000 (DW)	172,000 (DW)
Pavement Strength (PCN)	39	74	52	51
Pavement Surface Type	Asphalt	Paved	Paved	Paved
Pavement Surface Treatment	Grooved	Grooved	Grooved	Grooved
Effective Runway Gradient	0.02%	2.0% Max.	2.0% Max.	2.0% Max.
Line of Sight Requirements Met	Yes	Yes	Yes	Yes
Percent Wind Coverage (per RDC)	99.52%	99.52%	98.25%	98.25%
Runway Length	7,351'	8,000'	7,500'	8,000'
Take Off Run Available (TORA)	7,351'	8,000'	7,500'	8,000'
Take Off Distance Available (TODA)	7,351'	8,000'	7,500'	8,000'
Accelerate Stop Distance (ASDA)	7,351'	8,000'	7,500'	8,000'
Landing Distance Available (LDA)	7,351'	8,000'	7,500'	8,000'
Runway Width	150'	150'	150'	150'
Displaced Threshold	0'	0'	0'	0'
Shoulder Width	N/A	25'	25'	25'
Blast Pad Width	200'	200'	200'	200'
Blast Pad Length	200'	200'	200'	200'
Runway Safety Area (RSA) Width	500'	500'	500'	500'
RSA Length Past Departure End	1,000'	1,000'	1,000'	1,000'
RSA Length Prior to Threshold	1,000'	1,000'	1,000'	1,000'
Runway Lighting Type	HIRL	HIRL	HIRL	HIRL
Approach RPZ Start from Runway	Road in RPZ (35L)	200'	200'	200'
Approach RPZ Length		1,700' (17R) 2,500' (35L)	1,700' (17R) 2,500' (35L)	2,500' (Both)
Approach RPZ Inner Width		500' (17R) 1,000' (35L)	1,000' (Both)	1,000' (Both)
Approach RPZ Outer Width		1,010' (17R) 1,750' (35L)	1,510' (17R) 1,750' (35L)	1,750' (Both)
Departure RPZ Start from Runway	No Objects	200'	200'	200'
Departure RPZ Length		1,700' (Both)	1,700' (Both)	1,700' (Both)
Departure RPZ Inner Width		500' (Both)	500' (Both)	500' (Both)
Departure RPZ Outer Width		1,010' (Both)	1,010' (Both)	1,010' (Both)
Runway Marking Type	Precision	Precision	Precision	Precision
14 CFR Part 77 Approach Category	50:1 (35L) 34:1 (17R)	50:1 (35L) 34:1 (17R)	50:1 (35L) 34:1 (17R)	50:1 (Both)
Approach Type	PIR (35L) NPI (17R)	PIR (35L) NPI (17R)	PIR (35L) NPI (17R)	PIR (Both)
Visibility Minimums	½ mile (35L) 1 mile (17R)	½ mile (35L) 1 mile (17R)	1800 RVR (35L) ¾ mile (17R)	1600 RVR (35L) ½ mile (17R)



Design Standard	Actual Condition	Facility Requirement or Recommendation		
		Existing	Future	Ultimate
Type of Aeronautical Survey Req'd	VGA	VGA	VGA	VGA
Runway Departure Surface	Yes	Yes	Yes	Yes
ROFA Width	800'	800'	800'	800'
ROFA Length Past Departure End	1,000'	1,000'	1,000'	1,000'
ROFA Length Prior to Threshold	1,000'	1,000'	1,000'	1,000'
ROFZ Length Past Runway	200'	200'	200'	200'
ROFZ Width	400'	400'	400'	400'
Inner Approach OFZ	Yes (35L)	Yes (35L)	Yes (35L)	Yes (Both)
Inner Transitional OFZ	Yes (35L)	Yes (35L)	Yes (35L)	Yes (Both)
Precision ROFZ Length	200' (35L)	200' (35L)	200' (35L)	200' (Both)
Precision ROFZ Width	800' (35L)	800' (35L)	800' (35L)	800' (Both)
Runway 35L Threshold Siting Surface (TSS) Type	Precision ½ mile	Precision ½ mile	Precision ½ mile	Precision ½ mile
TSS Start from Runway End	200'	200'	200'	200'
TSS Length	10,000'	10,000'	10,000'	10,000'
TSS Inner Width	800'	800'	800'	800'
TSS Outer Width	3,800'	3,800'	3,800'	3,800'
TSS Slope	34:1	34:1	34:1	34:1
Runway 17R Threshold Siting Surface (TSS) Type	>Cat B, 1 mi., Night	>Cat B, 1 mi., Night	¾ mi., Night	Precision ½ mile
TSS Start from Runway End	200'	200'	200'	200'
TSS Length	10,000'	10,000'	10,000'	10,000'
TSS Inner Width	800'	800'	800'	800'
TSS Outer Width	3,800'	3,800'	3,800'	3,800'
TSS Slope	20:1	20:1	20:1	34:1
Visual and Instrument NAVAIDs	GS (35L), LOC, PAPI, REIL (17R), MALSR (35L)	GS (35L), LOC, PAPI, REIL (17R), MALSR (35L)	GS (35L), LOC, PAPI, CL, TDZL (35L) REIL (17R), MALSR (35L)	GS (35L), LOC, PAPI, CL, TDZL (35L) REIL (17R), ALSF (35L), MALSF (17R)
Runway and Taxiway Separation	400'	400'	400'	400'
Runway and Parking Separation	710'	500'	500'	500'
Runway and Hold Line Separation	265'	250'	250'	250'
Taxiway Design Group (TDG)	5	5	3	3
Taxiway and Taxilane Width	75'	75'	50'	50'
Taxiway and Taxilane Safety Area	171'	171'	118'	118'
Taxiway and Taxilane Separation	215'	215'	152'	152'
Taxiway and Taxilane Lighting	HITL	HITL	HITL	HITL

Note: **RED** indicates a known deficiency to existing minimum design standards as operated today

Source: [FAA AC 150/5300-13A - Change 1, Airport Design](#), KLJ Analysis



Table 4-54 – Runway 17L-35R Design Standard Matrix

Design Standard	Actual Condition	Facility Requirement or Recommendation	
		Existing	Ultimate
Planning Activity Level (PAL)	-	Base	PAL 2-4
Runway Identification	17L-35R	18L-36R	18L-36R
Runway Classification	Utility	Utility	Utility
Aircraft Classification	Small Aircraft	Small Aircraft	Small Aircraft
Runway Design Code (RDC)	B-II(S)-VIS	B-II(S)-VIS	B-II(S)-5000
Approach Reference Code (APRC)	D-IV-VIS D-V-VIS	D-IV-VIS D-V-VIS	D-IV-5000 D-V-5000
Departure Reference Code (DPRC)	D-IV, D-V	D-IV, D-V	D-IV, D-V
Pavement Strength (Wheel Loading)	12,500 (SW)	12,500 (SW)	12,500 (SW)
Pavement Strength (PCN)	9	N/A	N/A
Pavement Surface Type	Concrete	Paved	Paved
Pavement Surface Treatment	None	None	None
Effective Runway Gradient	0.03%	2.0% Max.	2.0% Max.
Line of Sight Requirements Met	N/A	N/A	N/A
Percent Wind Coverage (per RDC)	95.26%	95.26%	95.26%
Runway Length	3,901'	3,901'	3,900'
Take Off Run Available (TORA)	3,901'	3,901'	3,900'
Take Off Distance Available (TODA)	3,901'	3,901'	3,900'
Accelerate Stop Distance (ASDA)	3,901'	3,901'	3,900'
Landing Distance Available (LDA)	3,901'	3,901'	3,900'
Runway Width	75'	75'	75'
Displaced Threshold	0'	0'	0'
Shoulder Width	N/A	N/A	N/A
Blast Pad Width	N/A	N/A	N/A
Blast Pad Length	N/A	N/A	N/A
Runway Safety Area (RSA) Width	150'	150'	150'
RSA Length Past Departure End	300'	300'	300'
RSA Length Prior to Threshold	300'	300'	300'
Runway Lighting Type	MIRL	MIRL	MIRL
Approach RPZ Start from Runway	No Objects	200'	200'
Approach RPZ Length		1,000'	1,000'
Approach RPZ Inner Width		250'	250'
Approach RPZ Outer Width		450'	450'
Departure RPZ Start from Runway	No Objects	200'	200'
Departure RPZ Length		1,000'	1,000'
Departure RPZ Inner Width		250'	250'
Departure RPZ Outer Width		450'	450'
Runway Marking Type	Visual	Visual	Non-Precision
14 CFR Part 77 Approach Category	20:1	20:1	20:1
Approach Type	Visual	Visual	NPI
Visibility Minimums	None	None	1 mile
Type of Aeronautical Survey Req'd	NVGA	NVGA	VGA
Runway Departure Surface	Yes	Yes	Yes
ROFA Width	500'	500'	500'
ROFA Length Past Departure End	300'	300'	300'
ROFA Length Prior to Threshold	300'	300'	300'



Design Standard	Actual Condition	Facility Requirement or Recommendation	
		Existing	Ultimate
ROFZ Length Past Runway	200'	200'	200'
ROFZ Width	400'	400'	400'
Inner Approach OFZ	None	None	None
Precision ROFZ Length	None	None	None
Precision ROFZ Width	None	None	None
Threshold Siting Surface (TSS) Type	Visual Small > 50 knots	Visual Small > 50 knots	Cat A/B, 1 mi., Night
TSS Start from Runway End	0 feet	0 feet	200'
TSS Length	2,250' / 2,750'	2,250' / 2,750'	10,000'
TSS Inner Width	250'	250'	400'
TSS Outer Width	750' / 2,250'	750' / 2,250'	3,800'
TSS Slope	20:1	20:1	20:1
Visual and Instrument NAVAIDs	PAPI	PAPI	PAPI, REIL
Runway and Taxiway Separation	400'	400'	400'
Runway and Parking Separation	1,260'	250'	250'
Runway and Hold Line Separation	200'	200'	200'
Taxiway Design Group (TDG)	2	2	2
Taxiway and Taxilane Width	40'	35'	35'
Taxiway and Taxilane Safety Area	79'	79'	79'
Taxiway and Taxilane Separation	105'	105'	105'
Taxiway and Taxilane Lighting	MITL	MITL	MITL

Note: **RED** indicates a known deficiency to existing minimum design standards as operated today

Source: [FAA AC 150/5300-13A - Change 1, Airport Design](#), KLJ Analysis



Table 4-55 – Runway 9L-27R Design Standard Matrix

Design Standard	Actual Condition	Facility Requirement or Recommendation
		Existing, Future & Ultimate
Planning Activity Level (PAL)	-	PAL 1 - 4
Runway Identification	9L-27R	9L-27R
Runway Classification	Other-Than-Utility	Other-Than-Utility
Aircraft Classification	Large Aircraft	Large Aircraft
Runway Design Code (RDC)	B-II-5000	C-III-4000
Approach Reference Code (APRC)	D-IV-5000 D-V-5000	D-IV-5000 D-V-5000
Departure Reference Code (DPRC)	D-IV, D-V	D-IV, D-V
Pavement Strength (Wheel Loading)	95,000 (DW)	172,000 (DW)
Pavement Strength (PCN)	28	51
Pavement Surface Type	Concrete	Paved
Pavement Surface Treatment	Grooved	None
Effective Runway Gradient	0.03%	2.0% Max.
Line of Sight Requirements Met	Yes	Yes
Percent Wind Coverage (per RDC)	84.36%	92.57%
Runway Length	4,206'	6,700'
Take Off Run Available (TORA)	4,206'	6,700'
Take Off Distance Available (TODA)	4,206'	6,700'
Accelerate Stop Distance (ASDA)	4,206'	6,700'
Landing Distance Available (LDA)	4,206'	6,700'
Runway Width	100'	150'
Displaced Threshold	0'	0'
Shoulder Width	0'	25' (Rec'd)
Blast Pad Width	0'	200' (Rec'd)
Blast Pad Length	0'	200' (Rec'd)
Runway Safety Area (RSA) Width	150'	500'
RSA Length Past Departure End	300'	1,000'
RSA Length Prior to Threshold	300'	600'
Runway Lighting Type	MIRL	MIRL
Approach RPZ Start from Runway	No Objects	200'
Approach RPZ Length		1,700'
Approach RPZ Inner Width		1,000'
Approach RPZ Outer Width		1,510'
Departure RPZ Start from Runway	No Objects	200'
Departure RPZ Length		1,700'
Departure RPZ Inner Width		500'
Departure RPZ Outer Width		1,010'
Runway Marking Type	Non-Precision	Non-Precision
14 CFR Part 77 Approach Category	34:1	34:1
Approach Type	NPI	NPI
Visibility Minimums	1 mile	¾ mile
Type of Aeronautical Survey Req'd	VGA	VGA
Runway Departure Surface	Yes	Yes
ROFA Width	500'	800'
ROFA Length Past Departure End	300'	1,000'
ROFA Length Prior to Threshold	300'	600'



Design Standard	Actual Condition	Facility Requirement or Recommendation
		Existing, Future & Ultimate
ROFZ Length Past Runway	200'	200'
ROFZ Width	400'	400'
Inner Approach OFZ	None	Yes
Inner Transitional OFZ	None	Yes
Precision ROFZ Length	None	None
Precision ROFZ Width	None	None
Threshold Siting Surface (TSS) Type	Cat A/B, 1 mi., Night	>Cat B or ¾ mi., Night
TSS Start from Runway End	200'	200'
TSS Length	10,000'	10,000'
TSS Inner Width	400'	800'
TSS Outer Width	3,800'	3,800'
TSS Slope	20:1	20:1
Visual and Instrument NAVAIDs	PAPI (9L), VASI/REIL (27R)	PAPI, REIL, MALSF (9L)
Runway and Taxiway Separation	400'	400'
Runway and Parking Separation	715'	500'
Runway and Hold Line Separation	200'	250'
Taxiway Design Group (TDG)	3	3
Taxiway and Taxilane Width	50'	50'
Taxiway and Taxilane Safety Area	79'	118'
Taxiway and Taxilane Separation	105'	152'
Taxiway and Taxilane Lighting	MITL	MITL

Note: **RED** indicates a known deficiency to existing minimum design standards as operated today

Source: [FAA AC 150/5300-13A - Change 1, Airport Design](#), KLJ Analysis



Table 4-56 – Runway 9R-27L, Small GA Runway Design Standard Matrix

Design Standard	Actual Condition	Facility Requirement or Recommendation
		Existing, Future & Ultimate
Planning Activity Level (PAL)	-	PAL 1 - 4
Runway Identification	9R-27L	9R-27L
Runway Classification	Utility	Utility
Aircraft Classification	Small Aircraft	Small Aircraft
Runway Design Code (RDC)	B-I(S)-VIS	B-I(S)-VIS
Approach Reference Code (APRC)	D-IV-VIS D-V-VIS	D-IV-VIS D-V-VIS
Departure Reference Code (DPRC)	D-IV, D-V	D-IV, D-V
Pavement Strength (Wheel Loading)	12,500 (SW)	12,500 (SW)
Pavement Strength (PCN)	10	N/A
Pavement Surface Type	Concrete	Paved
Pavement Surface Treatment	None	None
Effective Runway Gradient	0.01%	2.0% Max.
Line of Sight Requirements Met	N/A	N/A
Percent Wind Coverage (per RDC)	76.82%	76.82%
Runway Length	3,300'	3,300'
Take Off Run Available (TORA)	3,300'	3,300'
Take Off Distance Available (TODA)	3,300'	3,300'
Accelerate Stop Distance (ASDA)	3,300'	3,300'
Landing Distance Available (LDA)	3,300'	3,300'
Runway Width	60'	60'
Displaced Threshold	0'	0'
Shoulder Width	N/A	N/A
Blast Pad Width	N/A	N/A
Blast Pad Length	N/A	N/A
Runway Safety Area (RSA) Width	120'	120'
RSA Length Past Departure End	240'	240'
RSA Length Prior to Threshold	240'	240'
Runway Lighting Type	MIRL	MIRL
Approach RPZ Start from Runway	No Objects	200'
Approach RPZ Length		1,000'
Approach RPZ Inner Width		250'
Approach RPZ Outer Width		450'
Departure RPZ Start from Runway	No Objects	200'
Departure RPZ Length		1,000'
Departure RPZ Inner Width		250'
Departure RPZ Outer Width		450'
Runway Marking Type	Visual	Visual
14 CFR Part 77 Approach Category	20:1	20:1
Approach Type	Visual	Visual
Visibility Minimums	None	None
Type of Aeronautical Survey Req'd	NVGA	NVGA
Runway Departure Surface	Yes	Yes
ROFA Width	250'	250'
ROFA Length Past Departure End	240'	240'
ROFA Length Prior to Threshold	240'	240'
ROFZ Length Past Runway	200'	200'
ROFZ Width	250'	250'



Design Standard	Actual Condition	Facility Requirement or Recommendation
		Existing, Future & Ultimate
Inner Approach OFZ	None	None
Inner Transitional OFZ	None	None
Precision ROFZ Length	None	None
Precision ROFZ Width	None	None
Threshold Siting Surface (TSS) Type	Visual Small > 50 knots	Visual Small > 50 knots
TSS Start from Runway End	0 feet	0 feet
TSS Length	2,250' / 2,750'	2,250' / 2,750'
TSS Inner Width	250'	250'
TSS Outer Width	750' / 2,250'	750' / 2,250'
TSS Slope	20:1	20:1
Visual and Instrument NAVAIDs	PAPI	PAPI
Runway and Taxiway Separation	400'	400'
Runway and Parking Separation	3,220'	125'
Runway and Hold Line Separation	200'	125'
Taxiway Design Group (TDG)	1A	1A
Taxiway and Taxilane Width	25'	25'
Taxiway and Taxilane Safety Area	79'	79'
Taxiway and Taxilane Separation	105'	105'
Taxiway and Taxilane Lighting	MITL	MITL

Note: **RED** indicates a known deficiency to existing minimum design standards as operated today

Source: [FAA AC 150/5300-13A - Change 1, Airport Design](#), KLJ Analysis



Passenger Terminal

Background

The requirements identified for the passenger terminal are identified to accommodate the travelling public with a sufficient level of service based on existing and projected growth. Since the last Airport Master Plan (2008), GFK constructed a new airport passenger terminal located directly south of the existing Fixed-Base Operator (FBO) in 2012, as well as a new apron space for air carrier aircraft. GFK also demolished the old passenger terminal building.

The existing passenger terminal building has two gates and three aircraft parking positions. In total, the passenger terminal building is comprised of approximately 50,000 square feet. Approximately 40,000 SF of space utilized for moving people and baggage as well as security. The remaining space is for airline, administration, mechanical and storage use.

This section will identify key issues with the existing passenger terminal building and provide planning-level conceptual planning and space requirements. Landside requirements for passenger loading & unloading and automobile parking are evaluated separately. Requirements identified as based on the following references to FAA, Transportation Security Administration (TSA), and International Air Transport Association (IATA) and industry standards:

- [*FAA AC 150/5360-13A, Planning and Design Guidelines for Airport Terminal Facilities \(2012\)*](#)
- [*Airports Cooperative Research Program \(ACRP\), Report 25: Airport Passenger Terminal Planning and Design Guidebook \(2010\)*](#)

The object of this section is to evaluate overall space needs compared to existing and future demand requirements. Alternatives addressing how needs will be fulfilled will be developed and presented in **Chapter 5: Alternatives Analysis**. Broad recommendations will be made in this study; details on a specific engineering and architectural review would be completed in a separate study.

Terminal Design

OVERALL CONSIDERATIONS

Terminals are designed to handle passenger volume and functions to interface between aircraft and ground transportation. Terminals must accommodate changes in the airline industry and passenger preferences. Factors that influence terminal design include:

- **Total Passenger Volume:** The annual number of passenger enplanements affects the total size and recommended configuration of a terminal building.
- **Passenger Peaking Characteristics:** Arriving or departing flights concentrated into a small timeframe require adequate space and throughput for surges in passenger ticketing, security, gates, baggage claim and concessions.
- **Passenger Preferences:** Business travelers typically are more experienced with airports, demand shorter wait times and efficiency. Leisure passengers require more time, attract meters/greeters and typically have more baggage to process. Airline fees also drive passenger preferences to check or carry-on baggage.
- **Airline Station Characteristics:** A spoke airport such as GFK has destinations as airline hubs. Spoke airports accommodate origin & destination (O&D) passengers rather than those using GFK to connect to another flight. Aircraft tend to remain overnight for the first flight out to a hub airport. Passengers have a requirement for check-in, security, baggage, and parking.
- **Aircraft Mix:** The size and frequency of the aircraft affects the number and size of the gates, passenger waiting holdroom and the terminal apron configuration.



- **International Service:** Airports with international service require aircraft to have longer gate occupancy times and additional space for Federal Inspection Services (FIS)
- **Industry Trends:** Industry changes are affecting terminal design. Examples include reduced airline flight frequency, higher load factors, evolving aircraft types, use of check-in kiosks, TSA pre-check program and airline baggage fees.

LEVEL OF SERVICE

Terminal improvements are evaluated in their ability to serve passengers and provide a comfortable experience through the airport. A Level Of Service (LOS) concept uses a set of standards to measure the quality of the passenger experience. LOS standards are used to evaluate the efficiency of passenger flow, space requirements and wait time. Each LOS has a defined space planning standard to determine facility requirements as identified in **Table 4-57**.

Table 4-57 – Level of Service (LOS) Standards

LOS	Service Level
Excellent (A)	Conditions of free flow; no delays; direct routes; excellent level of comfort
High (B)	Condition of stable flow; high level of comfort
Good (C)	Condition of stable flow; provides acceptable throughput; related systems in balance
Adequate (D)	Condition of unstable flow; delays for passengers; condition acceptable for short periods of time
Unacceptable (E)	Condition of unstable flow; subsystems not in balance; represents limiting capacity in the system
System Breakdown (F)	Unacceptable congestion and delays

Source: [ACRP Report 25: Airport Passenger Terminal Planning and Design](#)

The assumption for this master plan is to obtain LOS C which peak wait times are 10 minutes or below. Delays and space requirements are typically considered acceptable. LOS C is considered reasonable balance between ideal size and economic considerations.

AIRPORT CONSIDERATIONS

There are a few specific items that need to be addressed in this study for GFK. Based on conversations with airport management, the holding room space tends to be at maximum capacity. During peak hours/times, when two flights are waiting to board, passengers can sometimes be required to stand because sufficient seating is not available. This is especially true with an outbound Allegiant flight and outbound Delta flight are waiting to board, but also when aircraft are deplaning while other flights are waiting to depart. This study needs to evaluate holding room space needs and the ability to expand from the current configuration. The terminal was designed to handle 50-seat regional jet aircraft, not regular service from larger narrowbody aircraft.

A second item that needs to be evaluated are the gate positions for parked aircraft. With three current positions and two gates (one swinging between two aircraft parking positions), there are a limited number of parking positions available for aircraft. If one aircraft has maintenance issues and is unable to move, or poor weather forces aircraft to divert or stay at the gate, space would run out for aircraft to deplane/enplane through the terminal building. This especially holds true for public aircraft charters that operate from the passenger terminal..

Demand Factors

The primary function of a terminal is to provide adequate space to serve passengers. An evaluation of the passenger and gate demand is first completed to provide overall terminal space planning metrics at GFK.



PASSENGER ACTIVITY LEVELS

Planning activity levels (PAL) numbers in **Table 4-58** are to be used for terminal building planning. These figures provide an estimate of the number of passengers to arrive, depart and generally flow through the terminal building. The figures are based on a percentage of total enplaned passengers the existing airline schedule. No surge factor is provided for irregular operations.

Table 4-58 – Terminal Passenger Activity Levels

Metric	Base	PAL 1	PAL 2	PAL 3	PAL 4
Terminal Passengers					
Annual Enplanements	146,531	147,612	170,763	194,170	220,787
Design Hour Departing	192	193	223	254	289
Design Hour Arriving	192	193	223	254	289
Design Hour Total	363	366	423	481	547

Source: KLJ Analysis

DESIGN HOUR FLEET MIX

The aircraft fleet mix in the terminal area is determined using the total number of forecast departures as shown during the design hour. The design hour operations occur at two points daily when a Delta and Allegiant flight arrive and depart within the same hour.

Design hour aircraft types are grouped in Airplane Design Group (ADG) and class as seen in **Table 4-59**. The design aircraft for GFK will evolve to become a narrowbody, ADG-III aircraft accommodating up to 177 passengers. The aviation forecasts project the average number of seats per aircraft will increase from 73.6 to 101.9. Thus, the total number of flights is projected to increase 7 percent whereas the total number of passengers will increase by over 50 percent through PAL 4.

Table 4-59 – Design Hour Departures

Design Aircraft	Seats	Base	PAL 1	PAL 2	PAL 3	PAL 4
Medium Regional Aircraft (ADG-II)	50	1.57	0.74	0.27	0.00	0.00
Large Regional Aircraft (ADG II/III)	65-99	0.14	0.72	1.03	1.49	1.44
Narrowbody Aircraft (ADG-III)	110-177	0.36	0.38	0.52	0.54	0.79
Boeing 757 (ADG-IV)	181-215	0.03	0.01	0.01	0.00	0.00
Design Hour Departures	-	2.1	1.9	1.8	2.0	2.2

Source: KLJ Analysis

GATE REQUIREMENTS

Gates are necessary for aircraft to adequately serve arriving and departing aircraft. The minimum number of gates at an airport is a function of the peak hour activity. Additional contingency metrics are also used to determine the required gates.

GFK has three existing gates, two with passenger boarding bridges. The south boarding bridge swings between Gate 2A and 2B but cannot simultaneously deplane/enplane passengers from both gates. The north boarding bridge allows for one aircraft to deplane/enplane from Gate 1 independently.

Currently the airport typically experiences peak departures/gate demand on Mondays and Wednesdays during late morning hours when an Allegiant and Delta flight arrive and depart within the same hour. Gate congestion also occurs when Delta parks up to two aircraft overnight and during irregular operations. There is a need for independent use of the third gate with a passenger boarding bridge for operational flexibility. Outdoor enplaning and deplaning of passengers is not recommended in a colder climate like as Grand Forks.

Table 4-60 summarizes the total GFK gate needs.



Table 4-60 – Gate Requirements

Design Aircraft	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
Design Hour Departures	2.1	2.1	1.9	1.8	2.0	2.2
Contingency Gate	0	1	1	1	1	1
Total Gates	3*	3.1	2.9	2.8	3.0	3.2
Total Required Gates	3	3	3	3	3	3
Total Boarding Bridges	2	3	3	3	3	3

Source: KLJ Analysis; *One gate not available for independent use with a passenger boarding bridge

The total required gates is then split up into aircraft types using the fleet mix determinations to determine the total and equivalent number of gates for space planning. See Table 4-61.

Table 4-61 – Gate Space Requirements

Design Aircraft	Existing/ Base	PAL 1	PAL 2	PAL 3	PAL 4
Medium Regional Aircraft (ADG-II)	1*	0	0	0	0
Large Regional Aircraft (ADG-III)	1	1	1	1	1
Narrowbody Aircraft (ADG-III)	0	1	1	1	1
Boeing 757 (ADG-IV)	1	1	1	1	1
Total Number of Parking Positions	3	3	3	3	3
Narrowbody Equivalent Gate (NBEG)	1.6	1.6	1.8	2.0	2.2
Equivalent Aircraft (EQA)	1.1	1.1	1.2	1.3	1.5

Source: KLJ Analysis; *One gate not available for independent use with a passenger boarding bridge

Although GFK has three parking positions, there are only two parking positions with passenger boarding bridges to accommodate enplanements and deplaning. The existing position 2A can accommodate large regional aircraft with position 2B able to accommodate a medium regional aircraft simultaneously. Position 1 parking space is larger, capable of accommodating up to Boeing 757 (or similar) aircraft. Geometrics are tight.

Limitations in utilizing the existing three aircraft parking spaces are noticed during peak hours, maintenance issues, or any irregular operations that may arise. **As such, it is recommended in PAL 1 the airport plan to upgrade a parking position to accommodate narrowbody aircraft with an optional additional boarding bridge to the terminal area for irregular operations (IROPs).** This contingency gate would accommodate miscellaneous parking needs including maintenance issues, crew issues, overnight parking, weather delays and aircraft charters wishing to use a parking position. This position should be sized for Boeing 757 aircraft is possible.

By PAL 4 it is anticipated that a large regional, a narrowbody and Boeing 757 gate will be needed to accommodate increased design hour demand with contingencies. More than three parking positions and passenger boarding bridges may be needed beyond the planning period.

Building Areas

Individual functional areas of the terminal building have been evaluated to determine planning-level space needs to accommodate current and future demand. Space requirements will be a major consideration when evaluating terminal building development alternatives.

AIRLINE SPACE

There is approximately 1,500 SF of existing space behind the ticketing counters dedicated for the airline administration and operations offices. There is one dedicated airline using the space (Delta) and occupies approximately half of the available airline space. This space consists of a manager's office, operations room, break room, and training supplies/locker room. The remaining space is a blank shell available for an additional airline to have an office space. Allegiant does not require office space in the



main terminal area. Assuming each airline requires 600 SF of space, there is adequate space for airline management and circulation for up to two airlines/service providers at GFK.

Baggage Service Offices (BSO) provide handling and storage for late or unclaimed bags. GFK does not have an existing space dedicated to BSO facilities. A 300 SF BSO near the baggage claim area should be considered if the terminal building is upgraded in the long-term.

Other airline space considerations include airline ramp offices and support facilities on the airside portion of the airport. These are used for airline ground servicing functions. Dedicated offices are not available at GFK; the airline office near ticketing serves this function. Ground Storage Equipment (GSE) is parked outdoors in dedicated areas of the apron, or in a 900 SF area on the back side of the baggage handling area. These areas are generally considered to be adequate for two airline operations. Additional space would be needed for three airlines in the long-term.

Table 4-62 summarizes the airline space requirements.

Table 4-62 – Airline Space Requirements

Metric	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
Number of Airlines	2	2	2	2	3	3
Airline Office Space	1,500	1,200	1,200	1,200	1,800	1,800
Ramp Offices/Services	0	0	0	0	0	0
Baggage Service Office	0	300	300	300	300	300

Source: KLJ Analysis

TICKETING & CHECK-IN

The passenger check-in process continues to change as new technologies and processes are implemented. These changes have reduced the space needed in the ticketing lobby space and staffed ticket counter positions. Waiting times are also reduced. Traditionally, all passengers checked in at the ticket counter to both receive boarding passes and check baggage. Remote self-service equipment now allows individuals to obtain boarding passes online or at the airport without the need to use staffed ticket counters. A dedicated airline bag-drop representative handles checked baggage at the counter. The use of self-service equipment continues to grow. Potential future trends include self-tagging stations and remote off-airport bag-drop facilities which would reduce the need to have staffed positions at the airport.

The passenger check-in assumptions are important to evaluate space and facility needs. For planning purposes, the following assumptions are made:

- **Passengers Checking Baggage:** Average is 50 percent, 70 percent for leisure flights
- **Checked Baggage Location:** 100 percent within the terminal
- **Passenger Check-In Location:** 10 percent remote, 30 percent in-terminal kiosk, 60 percent in-terminal counter

The ticketing lobby in front of the ATO offices consists of approximately 2,000 SF of space and is located on the north end of the terminal building, not including general circulation space. When passengers enter the terminal, ticket counters are located directly across from the vestibule used to enter the building. Delta currently has five self-serve electronic kiosks located at the beginning of the passenger check-in lines. Eight staffed podiums (four podium locations with 2 monitors per podium) are available for passenger check-ins. The specific staffing levels are based on airline operations. Allegiant Airlines does not currently provide self-service kiosks for passenger check-ins.

Additional ticketing space may be needed as soon as in PAL 1 as summarized in Table 4-63. Based on the number of passengers using the terminal and peak hour demand, passenger queuing has not been an issue. In the future, additional passenger queuing may be needed to better funnel the passenger check-in process and preserve a circulation corridor.



Table 4-63 – Ticketing Requirements

Metric	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
Ticketing Positions	8	3	4	4	4	5
Bag Drops	0	1	1	1	1	1
Number of Dedicated Kiosks	5	2	2	2	2	2
Total Equivalent Positions	13	6	7	7	7	8
Total Ticketing Area (SF)	2,000	1,800	2,100	2,100	2,100	2,400

Source: KLJ Analysis

BAGGAGE SCREENING

Baggage screening is located directly behind the southern portion of the ticket podium area. This area and associated equipment are operated by the Transportation Security Administration (TSA) to screen airline baggage prior to being loaded onto the aircraft. This area houses one in-line baggage screening system, as well as tables, chairs, and office equipment used by the TSA for baggage processing. Bags are fed into this room via a bag belt directly behind the ticket counters. Cleared bags are sent to the baggage make-up facility as one integrated baggage system.

At GFK the baggage screening room is approximately 1,100 SF in size with one Explosive Detection System (EDS) machines to screen baggage. Secondary screening requires an on-screen resolution (OSR) by TSA personnel. If hand inspection is required, workstations are provided to further inspect bags using Explosive Trace Detection (ETD) machines.

The current in-line system is assumed to process 200 bags per hour with 70 percent of passengers checking an average of one bag. As summarized in **Table 4-64**, calculations recommended a second EDS machine by PAL 2 to process peak passenger baggage. Additional space is recommended for this action. TSA will make the decision to upgrade equipment.

Table 4-64 – Baggage Screening Requirements

Metric	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
Baggage Screening Area	1,100	940	940	1,740	1,740	1,740
Required EDS Units	1	1	1	2	2	2
Required OSR Screening Areas	1	1	1	1	1	1
Required ETD Workstations	3	1	1	1	1	1

Source: KLJ Analysis

BAGGAGE MAKE-UP

Baggage make-up facilities are located on the west half of the first floor of the terminal building. The existing baggage make-up area has approximately 2,300 SF of usable space. After security screening, bags are loaded onto a single carousel (sterile-side) and loaded by ground handlers for proper loading onto respective aircraft. Based on the interviews conducted of airline personnel, the existing layout is conducive for one airline processing bags. The existing layout only allows a few bag carts at a time to load bags, and can only load on one side of the carousel. Only baggage carts can access one side of the circular carousel.

Ideally, each airline would have their own carousel for loading bags and sorting. Because Allegiant and Delta process bags with separate ground crews, each airline must take their turn in front of the carousel. Space recommendations are based on two simultaneous aircraft with two narrowbody aircraft in PAL 4. Additional space for the baggage-make up area is recommended as summarized in **Table 4-65**.



Table 4-65 – Baggage Make-Up Requirements

Metric	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
Baggage Make-Up Area	2,300	3,000	3,000	3,000	3,000	4,000

Source: KLJ Analysis

SECURITY CHECKPOINT

The Security Screening Checkpoint (SSCP) area is used by TSA to screen passengers and property prior to entering the sterile area of the terminal concourse.

TSA staff at GFK processes passengers on the second floor. There is a total of 2,350 SF of space dedicated to staging and processing passengers and their baggage for security screening, including a 10-foot deep passenger reconciliation area. The TSA queuing space is 900 SF of the space and is typically full of passengers during peak operating hours. There is one main and one TSA Pre-Check queuing line that funnels into the TSA screening area.

The TSA screening area is 1,450 SF of space and has two lanes for baggage screening and passenger screening. There is one walk-through metal detector that services both baggage screening lanes. Based on passenger demand, one of these lanes can be used solely for TSA Pre-Check and one is used for other passengers. In previous years, GFK's TSA screening area did have one Advanced Image Technology (AIT) whole body scanner but was relocated to a different airport based on passenger demand.

The TSA office space is approximately 1,000 SF, is located directly north of the TSA screening facilities, and has an attached conference room for TSA use. Deplaning passengers exit through a double-door exit lane directly south of the TSA screening area. The doors are controlled automatically and do not allow passengers to walk back into the waiting area.

Throughput calculations of passengers at GFK were calculated using the ACRP 25 Terminal Planning Spreadsheet with basic assumptions:

- Throughput rate of 150 passengers per hour per lane
- Peak 30-minute originating passengers from check-in was calculated at half of the peak-hour demand for each PAL
- Maximum wait time goal to be achieved is 10 minutes

Security screening checkpoint requirements are summarized in **Table 4-66**. The existing checkpoint is short of recommended space needs now. It is anticipated GFK will require a third lane to process passengers by PAL 4 to meet peak demands and desired level of service. Without a third screening lane queue times are modeled to approach 12 minutes by PAL 4. Thus, additional space will be needed for the checkpoint. It is recommended GFK plan for possible TSA expansion options for processing passengers. Additional queuing and processing space may also be needed to dedicate to the TSA Pre-Check program which is not accounted for in the calculations.

Total percentage of passengers bring carry-on bags can reduce the throughput of passengers through the checkpoint, thus increasing security lines and space needs. Continued coordination with local TSA staff is highly recommended to monitor throughput rates.

Table 4-66 – Security Screening Checkpoint Requirements

Metric	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
Security Screening Lanes	2	2	2	2	2	3
Maximum Wait Time (min.)	-	1.1	1.3	4.6	7.9	1.1
Security Queue Area	900	900	900	900	900	1,350
Total Security Area	2,350	2,550	2,550	2,550	2,550	3,825

Source: KLJ Analysis

However, technology and processes will continue to evolve, and equipment size/location recommendations will change as technology progresses. Adding a TSA Pre-Check lane will increase



efficiencies in processing both pre-check and regular passengers, but requires additional dedicated queuing space not modeled. GFK recently implemented a pre-check lane in 2016. The analysis above assumes the two screening lanes are fully staffed and operational.

PASSENGER HOLDROOMS

Passenger holdrooms are designated areas in the sterile concourse area where passengers wait to board the aircraft at the gate. The size of the holdrooms are directly related to the aircraft size at each gate. The estimated fleet mix is used to determine holdroom sizing for each gate.

There is one combined passenger holdroom providing seating for outbound flights at GFK. The total usable area is approximately 4,200 SF to provide seating and amenities for passengers waiting to board their flights. Approximately 180 seats currently provide passenger seating for both gates. When outbound passengers clear the TSA checkpoint area, circulation space is used for passengers to re-group from the screening process. The holdroom area does not include a narrow 10-foot wide circulation corridor. Total usable holdroom depth is approximately 30 feet.

Adjacent to the south side of the holdroom area near Gate 2, there is a 600 SF concession area providing food, beverages, and souvenirs. More recently, a bar area was added in the holdroom and allows approximately 15-20 patrons to sit while waiting for their flight.

It is assumed that 80 percent of the travelers leaving GFK are utilizing the seating area, while 20 percent are choosing to stand. Gate 1 holdroom is assumed to accommodate up to a 177-seat aircraft and Gate 2 is designed for up to 76-seat aircraft. Holdroom size requirements are presented in Table 4-67.

Table 4-67 – Holdroom Requirements

Metric	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
Design Aircraft						
50 passengers (1,200 SF)	0	0	0	0	0	0
76 passengers (1,600 SF)	1	1	1	1	2	1
110 passengers (2,000 SF)	0	0	0	0	0	1
177 passengers (2,900 SF)	1	1	1	1	1	1
215 passengers (3,400 SF)	0	0	0	0	0	1
Total Airline Gates In Use	2	2	2	2	3	3
Total Holdroom Area	4,200	4,100	4,500	4,500	6,100	7,000
Total Required Seats	180	163	182	182	237	289

Source: KLJ Analysis

The existing effective holdroom capacity does not meet the needs of simultaneous 76-passenger and 177-passenger aircraft departures. There are also not enough total seats and space to meet PAL 1 demand needs. The holdroom calculations do not include irregular operations, when additional seating and space is needed.

In PAL 4, it is forecasted three aircraft may need to share the same holdroom space at the same time. From the base scenario, and per the ACRP 25 guidance, the holdroom area is 2,800 SF smaller than recommended guidance. It is recommended the airport plan evaluate holdroom expansion opportunities to react to future changes.

CONCOURSE SIZE & CIRCULATION

The overall size of the terminal concourse was evaluated for future space planning. The exterior terminal frontage is based on the aircraft fleet mix parked at the gate with sufficient wingtip clearance between aircraft. Table 4-68 contains a summary of the calculations.



Table 4-68 – Concourse Size & Requirements

Metric	Exist.	Base	PAL 1	PAL 2	PAL 3	PAL 4
Narrowbody Equivalent Gate (NBEG)	2.0	2.7	2.7	3.0	3.0	4.0
Aircraft Frontage (LF)	480	386	386	429	429	572
Circulation Corridor Width (ft.)	10	20	20	20	20	20
Gross Terminal Area Size (SF)	49,995	48,600	48,600	54,000	54,000	72,000

Source: KLJ Analysis

Through a concourse size/circulation capacity analysis per ACRP 25 guidance, the existing concourse width of 165 feet is sized for two medium regional aircraft (CRJ-200) connected to a passenger boarding bridge. A total approximate width of 480 feet is provided for aircraft parking frontage for three aircraft.

Concourse width is not adequately sized to meet demand for three parked aircraft at the gates each with a passenger boarding bridge; one medium regional aircraft (CRJ-200), one large regional aircraft (CRJ-900), and one narrowbody aircraft (Airbus A320). At about PAL 2, when airlines are anticipated to switch equipment to larger regional aircraft, additional width is needed if all three aircraft are to be accommodated at a gate. This will add efficiencies in passenger boarding and to help alleviate terminal congestion.

The scenario in PAL 4 assumes two large regional (CRJ-900 or similar) and two narrowbody (A320) aircraft are parking in front of the concourse. It is determined 572 feet of aircraft parking frontage is required to meet demand through PAL 4. Alternatives should be evaluated to accommodate this recommendation.

The current circulation corridor width is approximately 10 feet located adjacent to the back side of the holdroom area. The recommended minimum width for a circulation corridor for a single-loaded terminal design is 20 feet. **Increased terminal concourse depth is needed currently to meet passenger circulation needs.**

Using very general planning assumptions of 18,000 SF per narrowbody gate per the ACRP 25 report, the overall terminal building size is recommended to increase to accommodate larger aircraft as demand warrants for three demand-driven gates.

BAGGAGE CLAIM & HANDLING

Baggage claim devices are provided for arriving passengers to retrieve their checked bags from the aircraft. Bags are offloaded from the aircraft, placed on baggage carts, transported to a baggage handling area, and then offloaded onto the baggage belts in a secure area.

The baggage claim area is located on the first floor in the southwest corner of the terminal area with 4,000 SF of dedicated. There is one L-shaped flat-plate baggage carousel with approximately 110 LF of exposed frontage for passengers to retrieve their luggage. Roughly 25 LF of this carousel is on the sterile side of the terminal for baggage handlers to process bags of deplaned aircraft. When two aircraft are consecutively deplaning, this configuration can cause congestion issues on the sterile side. Other than the footprint of the baggage carousel, most the baggage claim space is used for passengers waiting for their baggage. It is assumed that roughly 70 percent of deplaning passengers wait for checked bags. **Table 4-69** summarizes the baggage claim & handling space needs.

Table 4-69 – Baggage Claim & Handling Requirements

Metric	Exist.	Base	PAL 1	PAL 2	PAL 3	PAL 4
Baggage Claim Frontage (LF)	110	77	78	90	102	116
Peak Single Aircraft Frontage (LF)	110	142	142	142	142	142
Total Baggage Claim Area (SF)	4,000	3,550	3,550	3,550	3,550	3,550
Total Baggage Handling Area (SF)	3,000	2,652	2,652	2,652	2,652	2,652

Source: KLJ Analysis



GFK's existing baggage handling/claim area is determined to be adequately sized (by area) through the planning period. It is recommended, however, the linear footage of available carousel space be lengthened. In the existing conditions, it is determined peak times require 142 LF of baggage carousel frontage. This peak time occurs when the design aircraft (Allegiant's A320) deplanes. Additional baggage offloading length within the baggage handling area is also recommended during any expansion of the claim device.

Total percentage of passengers checking bags dramatically changes the baggage claim requirements. Baggage trends should continue to be monitored by the airport with space needs updated. Over the past several years, airline fee structures have charged for checked bags reducing demand. The trend is for airlines to charge for carry-on bags as well which may cause the number of checked bags to increase again.

CONCESSIONS

Concessions areas within the airport terminal used for retail space are in the public and sterile portions of the terminal. Airport industry trends demand more concessions in the sterile portion of the terminal as passengers have increased dwell times after the security checkpoint. Additionally, liquids, aerosols and gels are heavily restricted through the security checkpoint.

One food/beverage concessionaire with nearly 2,000 SF of space operates at GFK with concession space on both the sterile and non-sterile portion of the concourse. Space includes seating area. Amenities include a gift shop, food/sandwiches made from the kitchen, and beverages. In recent years, a bar area was added to the sterile side. Seating is also available on the non-sterile side but does not permit alcohol consumption. Secure locking doors regulate access between the sterile and non-sterile areas and are used by concession staff only.

Vending machines are located on the first floor directly north of the baggage claim area. Vending machines are also located on the second floor hold room and in the greeter's lobby. Deliveries for concessions are conducted in a secure garage providing access on the south side of the terminal area. There is an elevator directly west of this garage that allows workers to move items upstairs through the secure side of the terminal.

There has not been expressed a need to provide additional retail or food/beverage concession space, however additional space should be considered in the sterile area if the terminal concourse is expanded in the future. Additional space could be made available in the first floor waiting area.

RENTAL CAR

Rental car facilities are conveniently located directly east of the baggage lobby area. Three companies (Enterprise, Avis, Hertz) provide vehicle rental services for GFK and each occupy a 250 SF office. Total rental car space is 1,700 SF which includes service counters and customer queuing space away from the general terminal lobby circulation area. There are no available offices for additional vehicle rental companies. A separate exit provides access to rental vehicle ready/return parking lots immediately adjacent to the terminal building. Tenants are satisfied with the space provided and find the layout to be convenient and easily accessible. Rental car space needs are summarized in **Table 4-70**.

Table 4-70 – Rental Car Requirements

Metric	Exist.	Base	PAL 1	PAL 2	PAL 3	PAL 4
Number of Providers	3	3	3	3	3	4
Rental Car Office Area (SF)	750	675	675	675	675	900
Rental Car Area (SF)	1,700	1,575	1,575	1,575	1,575	2,100

Source: KLJ Analysis

Airports accommodating nearly 500,000 passengers typically accommodate up to four rental car providers. If the terminal building were to be expanded in the future, office to accommodate a fourth rental car provider should be considered.



AIRPORT ADMINISTRATION

GFK has a total of nearly 2,100 SF of airport administration space. The primary Grand Forks Regional Airport Authority offices are located on the second floor with 1,600 SF of space for reception/waiting, four offices and a boardroom. Administration space on the first floor includes a general 500 SF conference room. Space requirements are deemed adequate for the planning period.

There is no dedicated in-terminal space for airport security or Law Enforcement Officer (LEO). A dedicated space is recommended when the terminal is expanded.

PUBLIC SPACES

Public spaces include non-revenue generating areas of the terminal building used for restrooms, circulation, seating and waiting areas. Building systems to support the operations of the terminal include mechanical, electrical and telecommunications spaces.

Public restrooms at GFK are in a central location within the secure airside area. Additional public restrooms are in the non-secure landside area on the first and second floors. Within the airside area, there are a total of 10 women's fixtures and 7 men's fixtures and one family/unisex restrooms. Restrooms should be sized to accommodate passengers' carry-on luggage. Female restrooms have an additional 25% fixture factor added to meet some building code requirements. One unisex/family restrooms should also be provided per restroom module. Total restroom fixtures needed were calculated based on [ACRP Report 130: Guidebook to Airport Terminal Restroom Planning and Design](#). Peak hour restroom requirements are summarized in **Table 4-71**. No additional restroom fixtures are needed to meet PAL 4 demands.

Table 4-71 – Restroom Requirements

Metric	Exist.	Base	PAL 1	PAL 2	PAL 3	PAL 4
Airside Secure Area						
Male Restrooms	3	2	2	2	2	3
Female Restrooms	5	3	3	3	3	4
Unisex/Family Restrooms	1	1	1	1	1	1
Total Fixtures	9	6	6	6	6	8
Landside Non-Secure Area						
Male Restrooms	7	4	4	5	5	6
Female Restrooms	8	5	5	7	7	8
Unisex/Family Restrooms	2	2	2	2	2	2
Total Fixtures	17	11	11	14	14	16

Source: [ACRP Report 130](#), KLJ Analysis

General circulation in the terminal is sufficient with three public entry/exit points. The secure waiting area has a narrow circulation corridor. The existing effective width of this corridor is 10 feet where 20 feet is recommended. Widening the corridor would affect holdrooms space which is already at capacity during peak periods. The overall depth of the concourse should be widened during a future terminal expansion project. Circulation efficiency is a product of good wayfinding signage that exists at GFK.

A 3,400 SF meet/greet lobby is located on the second level adjacent to the exit lane and the security checkpoint. The size of this area is sufficient to meet the needs through the planning period. There is also additional waiting areas located near the south main entrance.

OTHER SPACES

There is a general lack of storage space in the terminal building at GFK. Additional space should be considered during any expansion project. Also, the data/technology room is undersized for the need. Additional secondary space should be considered.



SPACE SUMMARY

Table 4-72 summarizes the identified space requirements for the GFK passenger terminal building.

Table 4-72 – Passenger Terminal Building Space Requirements

Metric	Exist.	Base	PAL 1	PAL 2	PAL 3	PAL 4
Demand						
Annual Enplanements	-	146,531	147,612	170,763	194,170	220,787
Building Areas						
Total Required Gates	3	3	3	3	3	3
Total Passenger Boarding Bridges	2	3	3	3	3	4
Airline Ticket Office (SF)	1,500	1,200	1,200	1,800	1,800	1,800
Equivalent Ticketing Positions	13	6	7	7	7	8
Ticketing Area (SF)	2,000	1,800	2,100	2,100	2,100	2,400
Baggage Screening Area (SF)	1,100	940	940	1,740	1,740	1,740
Baggage Makeup Area (SF)	2,300	3,000	3,000	3,000	3,000	4,000
Security Screening Lanes	2	2	2	2	2	3
Total Security Area (SF)	2,350	2,550	2,550	2,550	2,550	3,825
Total Holdroom Area (SF)	4,200	4,500	4,500	4,500	6,100	7,000
Total Holdroom Seats	180	163	182	182	237	289
Aircraft Frontage (LF)	480	386	386	429	429	572
Concourse Circulation Width (SF)	10	20	20	20	20	20
Baggage Claim Frontage (LF)	110	142	142	142	142	142
Baggage Claim Area (SF)	4,000	3,550	3,550	3,550	3,550	3,550
Baggage Handling Area (SF)	3,000	2,300	2,300	2,400	2,500	2,500
Rental Car Area (SF)	1,700	1,575	1,575	1,575	1,575	2,100
Airside Restroom Fixtures	9	6	6	6	6	8
Landside Restroom Fixtures	17	11	11	14	14	16
Gross Terminal Size (SF)	49,995	48,600	48,600	54,000	54,000	72,000

Source: KLJ Analysis

Aircraft Apron

TERMINAL APRON

The primary purpose of the terminal apron is to provide parking for commercial passenger aircraft at the terminal gate and provide circulation space for aircraft and airline support functions. There are two existing Passenger Boarding Bridges (PBBs) and three parking spaces available. In the long-term there is demand for a total of three aircraft parking positions, each with a PBB.

The terminal apron size and configuration is a function of the total number of gates, building configuration, aircraft type, airfield configuration, aircraft maneuvering and FAA design standards including wingtip clearances. It should be sized to accommodate regular use of design aircraft as identified in the gate space requirements.

The existing apron size is approximately 480-feet in length and 300-feet deep abutting 200 LF of terminal frontage. Total recommended terminal apron dimensions based on the anticipated design aircraft is identified in Table 4-73.

Table 4-73 – Basic Passenger Terminal Apron Size Requirements

Metric	Exist.	Base	PAL 1	PAL 2	PAL 3	PAL 4
Apron Width (LF)	480	386	386	429	429	572
Apron Depth (LF)*	300	322	322	322	322	322

Source: KLJ Analysis; *Includes 25' wide dedicated airfield service road



As the terminal building concepts are developed, software will be utilized to model gate configuration which will help identify the required terminal apron size to match with terminal building. Gates should be designed to provide adequate space for taxi-in and push-back operations.

One access taxiway resides on the southwest corner of the apron area and provides the only means of aircraft access to the terminal area. This access is sufficient provided it is kept free and clear for maneuvering aircraft operations. When there is more than one airplane taxiing there is not sufficient space for a bypass causing operational delays. **An apron depth expansion with a secondary access point is a recommended improvement to meet existing needs.**

DEICING APRON

Aircraft deicing is necessary prior to departure in cold weather conditions. While no pavement markings are present, GFK conducts deicing operations in the northwest corner of the air carrier apron area. Due to the existing apron layout, this is the only available space on the apron for conducting deicing operations. When this occurs, Gate 1 and 2A parking positions become constrained with aircraft unable to push back or taxi into the gate. The process of deicing aircraft (approximately 15 minutes) has been known to cause delay in aircraft operations. Deicing operations also occur within the safety zones for parked aircraft.

It is recommended a dedicated non-movement area aircraft deicing area to accommodate the design aircraft be developed as soon as practical. Deicing facilities need to have space for aircraft and wingtip clearance, as well as space for mobile equipment maneuvering, access taxiway, appropriate runoff mitigation to meet environmental requirements, as well as lighting and support facilities. The capacity of the deicing pad(s) should accommodate up to one ADG-IV or two ADG-III aircraft.

REMAIN OVERNIGHT PARKING (RON)

There is currently no designated off-terminal RON parking apron at GFK. Commercial aircraft typically park overnight at the terminal gates. Typically, there is two (2) Delta aircraft parked at the gate every night that departs early the next morning. Allegiant Airlines does not conduct RON operations.

Airline schedules and how they operate their fleet of aircraft drive RON needs. It is difficult to predict whether an airline chooses to overnight a flight crew at a destination. It is reasonable to anticipate Delta will continue an RON aircraft at GFK into the future. Should another airline conduct flights at GFK with RON operations, this would leave the existing apron area with only one usable aircraft parking space with gate access. A multi-use aircraft deicing apron and RON parking apron should be considered.

GROUND EQUIPMENT STORAGE

Airlines typically operate their own ground service equipment (GSE), including a variety of aircraft tugs, pushbacks, service vehicles, deicers, ground power units (GPUs), baggage belt-loaders, and other support vehicles. GFK owns and maintains some of the GSE.

GSE is mainly stored inside the baggage handling area, as well as some items outside along the north side of the terminal building. Storage areas do not interfere with regular apron operations. All GSE is stored outside of maneuvering areas. If the terminal building is expanded, additional indoor parking should be considered in the future to be flexible to individual airline needs for heated GSE storage.

IRREGULAR OPERATIONS

GFK has experienced several different types of Irregular Operations (IROPs) from weather diversions, maintenance diversions and medical emergencies. The IROPs at GFK have parked at the terminal gates, but more commonly have utilized the old air carrier apron space. Occasionally, international aircraft have used GFK as a diversion location as well. It is recommended the airport evaluate possible opportunities for an alternative location for IROPs parking closer to the terminal building, potentially in a combined deicing/RON/IROPs apron. An additional contingency gate with a passenger boarding bridge connection to the terminal is recommended to accommodate IROPs.



PAVEMENT CONDITION & STRENGTH

A summary of the passenger terminal air carrier pavement condition with recommendations is in **Table 4-74**.

Table 4-74 – Air Carrier Pavement Condition & Recommendations

Pavement ID	Pavement Condition Index (PCI)		Action Plan (Lowest PCI)		
	Highest PCI	Lowest PCI	0-5 Years	6-10 Years	11-20 Years
Air Carrier Apron	95		Maintain	Maintain	Maintain

Source: *North Dakota Aeronautics Commission Pavement Condition Assessment (2015), KLJ Analysis*

The air carrier apron should generally be designed to accommodate the design aircraft to serve that area. At GFK this includes up to 172,000 pounds dual-wheel design aircraft with an ACN value of 51. The existing pavement strength is calculated of the air carrier apron is sufficient to serve the existing and future design aircraft (see **Table 4-75**). No changes are recommended.

Table 4-75 – Air Carrier Pavement Strength

Pavement ID	Existing Calculated Strength	
	Capacity	PCN
Air Carrier Apron	120,000 (SW)	60/R/C/W/T
	198,000 (DW)	
	313,000 (DTW)	

Source: *KLJ Analysis*

Air Cargo

Background

There is a dedicated air cargo complex located in the southwest portion of the GFK terminal area with a heavy-pavement apron, feeder aircraft apron, aircraft storage hangar and cargo processing building.

On October 31st, 2016, FedEx relocated their operations to Fargo Hector International Airport (FAR). With the departure of FedEx, GFK's Airport Authority will work with local officials, economic development, and other stakeholders to attract a replacement tenant. This analysis assumes FedEx no longer conducts regional hub air cargo operations at GFK.

The all-cargo operations remaining at GFK include 5-6 weekly flights from Encore Air Cargo operating a UPS feeder service from Sioux Falls. Overall, it is recommended remaining and new all-cargo sort operations utilize the existing infrastructure at the air cargo complex as much as possible.

Processing and Storage Building

FedEx currently has a sorting facility located on the airfield and is approximately 20,300 SF in size. This sorting facility has three drive-through bays for semi loading and unloading, as well as a large area for processing cans unloaded/loaded into the A300 aircraft. On an annual basis, FedEx has processed millions of pounds of air cargo freight and mail from this facility.

With the departure of FedEx, GFK is forecast to process less than 700,000 pounds of mail and cargo annually through the planning period. The current processing and storage building more than meets any anticipated any anticipated all-cargo need. Remaining air cargo sort operations should be relocated from the Alpha Apron to the cargo facility. Certain portions of the building may be able to be reutilized without impacting cargo operations.



Aircraft Apron

SIZE & CONFIGURATION

Adequate aircraft apron space is required to accommodate peak all-cargo activity. After FedEx's departure, expected remaining air cargo activity includes up to twice-daily UPS feeder operations. The required air cargo apron size is driven by the number and size of the air cargo aircraft on the ramp at one time. The existing all-cargo apron is 20,620 square yards in size accommodating two mainline and one feeder aircraft. Additional cargo operations also occur in the Alpha Apron.

With FedEx's departure, there is a significant reduction in aircraft parking demand. Their operation demanded parking and sort operations space for multiple feeder aircraft (ADG-II) and two Airbus A300 mainline aircraft (ADG-IV). An estimate of aircraft space requirements per ADG are noted in the **Table 4-76**.

Table 4-76 – Air Cargo Apron Requirements

Category	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
Cargo Aircraft						
Design Group I	0	0	0	0	0	0
Design Group II	9	11	2	2	3	3
Design Group III	0	1	0	0	0	0
Design Group IV	2	2	0	0	0	0
TOTAL	11	14	2	2	3	3
Capacity/Deficiency	-	3	9	9	8	8
Cargo Apron Space (SY)						
Design Group I (1,000 SY)	-	0	0	0	0	0
Design Group II (2,400 SY)	-	20,900	3,800	3,800	5,700	5,700
Design Group III (3,100 SY)	-	3,100	0	0	0	0
Design Group IV (8,300 SY)	-	15,800	0	0	0	0
Total Space	20,620	24,000	3,800	3,800	5,700	5,700
Capacity/Deficiency	-	3,380	16,820	16,820	14,920	14,920

Source: KLJ Analysis

An aircraft apron accommodating up to three simultaneous all-cargo Airplane Design Group (ADG) II parked aircraft should be preserved to meet remaining and anticipated future demand. Remaining cargo aircraft operations should be relocated and consolidated from the Alpha Apron to the all-cargo facility.

PAVEMENT CONDITION & STRENGTH

A summary of the air cargo pavement condition with recommendations is in **Table 4-77**.

Exhibit 4-77 – Air Cargo Pavement Condition & Recommendations

Pavement ID	Pavement Condition Index (PCI)		Action Plan (Lowest PCI)		
	Highest PCI	Lowest PCI	0-5 Years	6-10 Years	11-20 Years
Air Cargo Apron	93	84	Maintain	Maintain	Maintain

Source: North Dakota Aeronautics Commission Pavement Condition Assessment (2015), KLJ Analysis

The heavy (west) portion of the air cargo apron should be designed to accommodate a design aircraft up to 60,000 pounds dual-wheel. The calculated pavement strength of the air cargo apron (heavy portion) is in **Table 4-78** and has some of the highest strength at GFK. No pavement strength was calculated on the light (east) portion. No changes are recommended.



Exhibit 4-78 – Air Cargo Pavement Strength Requirements

Pavement ID	Existing Calculated Strength	
	Capacity	PCN
Air Cargo Apron (Heavy)	120,000 (SW)	69/R/C/W/T
	225,000 (DW)	
	362,000 (DTW)	

Source: KLJ Analysis

General Aviation

Background

General Aviation (GA) includes all civil aviation activities except for commercial service. GA covers a much broader portion of the aviation community. GA activity at GFK includes corporate travel, medical transport, flight training, personal and business flights as well as recreational flying. These types of aeronautical activities serve the public in a capacity that may be less noticeable to the average citizen. Providing facilities and access for GA users at GFK will continue to be an important benefit of GFK. GA and UND activity makes up 95 percent of operational activity at GFK.

University of North Dakota flight training activities account for most annual aircraft operations at GFK. Even though UND's operations are considered Air Taxi by FAA, their activity is included in this GA discussion. There are 147 based aircraft and over 310,000 annual flight operations classified as UND flight training or GA. Based aircraft is projected to grow 21 percent with operations growing by 20 percent through the planning period. GA facilities are necessary to support these operations on the airfield. On-airport businesses providing aeronautical services known as Fixed-Base Operators (FBOs) provide aircraft maintenance, fueling and other and pilot and passenger services. FBOs are vital to serve the needs of GA users.

Overall, GFK continues to serve as the primary GA facility for the Grand Forks community handling the clear majority of corporate business traffic. Providing necessary facilities and access for these GA users, as well as the ability to promote growth and development, should continue to be a priority. Steady growth in both the UND and non-UND GA sectors is forecast through the planning period. GA facilities evaluated include aircraft storage, aircraft parking apron, fueling facilities and related landside infrastructure.

Previous Studies

GFK conducted a "Building Area Study" in 2014 to study providing additional aircraft storage space flexible to accommodate future demand of based aircraft. On the west side of the airfield, existing T-hangars have exceeded their useful life and need to be reconstructed. Moreover, the hangar setbacks from respective taxilanes do not meet FAA design standard. Due to the need for hangar reconstruction, and the inability to meet existing FAA design standard, an east-side hangar development was identified as an adequate solution. This east-side development area will house the relocated smaller general aviation aircraft, and allow the existing west-side footprint to be reconstructed in a layout more conducive to larger corporate-type jet traffic. With pavement on the west-side of the airfield servicing larger/heavier aircraft, this scenario best-utilizes space for future growth opportunities. Meanwhile, the east-side hangar development relocates smaller aircraft that do not need heavier pavement infrastructure. The east-side general aviation hangar development project is expected to begin within the next couple of years.

Aircraft Storage

Operational requirements drive aircraft storage requirements including aircraft size, local climate, and owner preferences. For based aircraft, the harsh winters in the upper Midwest drive all owners to seek aircraft storage facilities rather than outdoor parking on an aircraft parking apron. Owners prefer to have covered, secure storage for their aircraft with space for other aeronautical facilities including an



office or maintenance/storage areas. All based aircraft at GFK are stored in aircraft storage hangars. Transient aircraft travel to airports for up to a few days at a time. These aircraft typically park on the aircraft apron or seek temporary indoor aircraft storage, especially during adverse weather conditions.

A facility space model was developed to estimate aircraft storage hangar size needs. The model uses the based aircraft fleet mix forecast and estimates a size per aircraft type to determine recommended facility space. The GFK based aircraft forecasts estimate another 32 based aircraft through the planning period (PAL 4) consisting of a fleet mix of an additional 4 single-engine/other, 4 multi-engine, 7 turbojet and 1 helicopter.

BASED AIRCRAFT

All existing based aircraft are currently stored in approximately 262,800 SF of hangar space with most the hangar square footage used by the University of North Dakota. Areas available for hangar development are currently at a premium.

To quantify an estimated future hangar space needs, assumptions were made on aircraft type and the space required to house each type. The assumptions for required hangar size are as follows:

- Single-Engine Piston/Other: 41' x 32' storage area (1,312 SF)
- Multi-Engine/Turboprop: 50' x 40' storage area (2,000 SF)
- Turbojet: 65' x 60' storage area (3,900 SF)
- Helicopter: 45' x 45' storage area (2,025 SF)
- Additional 10 percent for general aeronautical storage and supplies

Using these assumptions with based aircraft forecasts, a projected need for based aircraft storage is determined. Results are summarized in **Table 4-79**. The assumptions above do not consider the existing aircraft hangar storage size, but rather a recommended size based on typical aircraft size in each category and includes contingency space for maneuverability and tool/equipment storage in the hangar as well. Based on 2014 based aircraft numbers, there is an estimated 1,788 SF of hangar space per based aircraft currently.

Table 4-79 – Based Aircraft Storage Requirements

Category	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
Based Aircraft Storage Space (SF)						
Single-Engine Piston	-	124,640	136,448	144,320	146,944	150,880
Multi-Engine/Turboprop	-	42,000	46,000	50,000	50,000	50,000
Turbojet	-	74,100	81,900	89,700	93,600	101,400
Helicopter	-	24,300	24,300	24,300	24,300	26,325
Maintenance/Storage	-	26,504	28,865	30,832	31,484	32,861
Aircraft Storage Space	262,800⁹	291,544	317,513	339,152	346,328	361,466
Capacity/Deficiency	-	28,744	54,713	76,352	83,528	98,666

Source: KLJ Analysis

Based on the assumptions above there is an existing deficiency in available hangar space at GFK. It should be noted, with over 65 percent of the based aircraft being UND, recommended hangar space is skewed because UND has multiple large hangars and stacks their aircraft in tight spaces. This is not ideal for a typical GA aircraft owner. That said, between PAL 1 and PAL 4, nearly 100,000 SF of additional hangar space should be planned for to accommodate the anticipated based aircraft demand. This is a 24 percent increase of hangar space needed through PAL 4.

Other considerations for based aircraft include sufficient automobile parking. ACRP Report 113 recommends 1 space for each 1,000 square feet of floor space. Assuming existing parking is sufficient,

⁹ Includes Mass 3 and Mass 4 hangars (10,100 SF) since removed by the Airport Authority



this would equate to approximately 28 to 98 new spaces over the planning period to accommodate aircraft storage space needs.

TRANSIENT AIRCRAFT

Transient aircraft storage is utilized on an as-needed basis as aircraft require temporary storage. Aircraft types that require this type of storage are typically larger and more expensive airplanes such as turboprop and turbojet aircraft. Storage timeframes vary but can be for a few hours to several days.

Transient non-UND hangar storage is handled from AvFlight, the local FBO using a heated hangar space (125' x 125') attached to AvFlight's FBO facilities, and Mass Hangar #2 (120' x 85') heated hangar. Approximately 26,000 SF is currently available from the FBO for transient aircraft storage, estimated to be sufficient total storage for four multi-engine/turboprop and four turbojet aircraft.

It is recommended the airport provide a large amount of flexibility for transient hangar development space. With the large amount of corporate transient aircraft operations historically at GFK, growth in this area of aircraft operations do not show signs of slowing through the planning period. Larger aircraft are anticipated on average. Up to 50 percent additional transient aircraft space should be planned at GFK by PAL 4 to accommodate six multi-engine/turboprop and six turbojet aircraft. Transient aircraft space should be located along apron pavement frontage with landside connections. Table 4-80 summarizes the transient aircraft storage space recommendations.

Table 4-80 – Transient Aircraft Storage Requirements

Category	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
Transient Aircraft Storage Space (SF)						
Corporate Hangar	26,000	25,960	28,160	32,450	34,650	38,940
Capacity/ Deficiency	-	40	2,160	6,450	8,650	12,940

Source: KLJ Analysis

Aircraft Parking Apron

GA aircraft parking is utilized by transient or based aircraft. With all the based aircraft at GFK stored in hangars, the aircraft parking necessary for transient aircraft requiring parking for a few minutes to a few days. Itinerant aircraft will require either covered aircraft storage (based or transient) or apron parking space. For this analysis, the UND and non-UND aprons were evaluated separately.

AIRCRAFT DEMAND

The apron size is driven by the number and size of maneuvering and parked aircraft. The purpose of this analysis is to determine the triggering point for additional general aviation apron space using the aviation activity demand forecasts. Assumptions include:

- Use of annual itinerant operations fleet mix based on the aviation forecasts.
- Average busy day (0.592 percent of annual operations), assumes larger itinerant aircraft operate on a non-peaking schedule year-round.
- 25 percent of small single-engine, multi-engine, helicopter, and other aircraft types will require apron space at the same time upon arrival.
- 50 percent of turboprop and turbojet landings will require apron space at the same time upon arrival.
- Remainder of arriving aircraft will require a transient or based aircraft hangar for staging.

Apron size is driven by the size of the design airplane and size of the aircraft parking positions required. A standard tie-down position accommodates one small aircraft. Larger aircraft occupy additional space and can be accommodated with a nested tie-down configuration. The following factors are used per [ACRP Report 113, Guidebook on General Aviation Facility Planning](#):

- Single-Engine/Multi-Engine/Other: 1.00



- Helicopter: 2.00
- Large Multi-Engine/Turboprop: 2.50
- Turbojet: 3.00

The UND apron requires the capacity to stage all the based aircraft during morning ramp-up and evening ramp-down operations. The non-UND apron serves itinerant aircraft types. Both aprons appear to have sufficient tie-downs to accommodate demand through PAL 4. The corresponding number of aircraft and equivalent tie-down positions is summarized in **Table 4-81**.

Table 4-81 – Aircraft Parking Requirements

Category	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
UND Aircraft Parking Positions						
Total Based Aircraft	-	99	99	106	109	109
Equivalent Tie-Downs	144	112	111	118	122	122
Capacity/Deficiency	-	32	33	26	22	22
Non-UND Aircraft Parking Positions						
Itinerant Operations	-	17,475	15,178	17,033	19,248	21,463
Average Busy Day Arrivals	-	52	45	50	57	64
Total Parked Aircraft	-	17	15	17	19	21
Equivalent Tie-Downs	62	32	29	32	35	40
Capacity/Deficiency	-	30	33	30	27	22

Source: KLJ Analysis


SIZE & CONFIGURATION

Apron size must accommodate both the required aircraft parking positions and maneuvering standards based on FAA Airplane Design Group (ADG) standards. Aircraft maneuvering at GFK is required to accommodate safety setbacks for FAA ADG-II wingspan aircraft for the GA apron area (Alpha Apron) and ADG-I for UND's apron space (Bravo, Charlie Apron). Alpha, Bravo and Charlie aprons do not meet their respective setback requirements as outlined in [AC 150/5300-13A, Change 1](#).

The effective existing apron sizes were reviewed. The usable Alpha apron size has been adjusted to 34,000 SY to remove pavement areas to be removed in the future around the old terminal and within the Runway Visibility Zone (RVZ). Apron areas within the RVZ are unusable for aircraft parking as it causes a line-of-sight obstruction for intersecting runways. The effective Bravo apron space is 22,800 SY and Charlie Apron is 33,300 SY reflecting core UND aircraft parking areas.

The preferred apron design for general aviation apron space is a dual taxilane configuration to support taxi-in and taxi-out operations. As of 2016, UND is currently undergoing major pavement reconstruction of their apron areas. Aircraft tie-down layouts may vary from what has historically been present at the airport because of this pavement project.

Alpha, Bravo, and Charlie aprons have been laid out in a nested aircraft tie-down design. While nested tie-downs add additional capacity for aircraft parking, they also increase the risk of aircraft damage and incidents with aircraft parked close together. Drive through tie-down layouts provide guided access to aircraft tie-down spaces, but do not maximize apron space/utilization. The alternatives section should evaluate apron layout options to allow the airport to accommodate this design if desired.

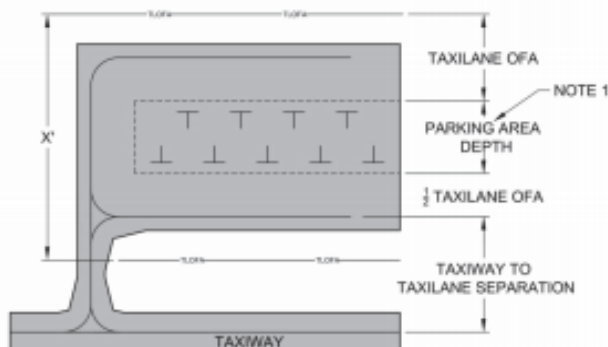

Dual-Taxilane Apron Configuration (ACRP Report



The apron space calculations in **Table 4-82** are based on nested equivalent tie-down configuration. Based on this assessment, the existing apron is of sufficient size for the equivalent tie-downs space needed to accommodate the existing and projected need. Aprons will require reconfigured tie-downs to meet all FAA setback requirements for the design aircraft. Accommodating larger ADG-III aircraft will require additional space.

Table 4-82 – Transient Apron Size Requirements

Category	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
UND Apron Area (SY)						
Equivalent Tie-Downs	144	112	111	118	122	122
Apron Area	56,100	70,300	69,600	74,300	76,800	76,800
Capacity/Deficiency	-	14,200	13,500	18,200	20,700	20,700
Non-UND Apron Area (SY)						
Equivalent Tie-Downs	31	32	29	32	35	40
Apron Area	34,000	35,200	31,900	35,200	38,500	44,000
Capacity/Deficiency	-	1,200	2,100	1,200	4,500	10,000

Source: KLJ Analysis

It is recommended all apron space continue to be lighted always with stand-alone flood lights around the terminal building area.

The north portion of the Alpha Apron is located within the Runway Visibility Zone (RVZ). No parked aircraft should be in this area not under direct ATCT control.

PAVEMENT CONDITION & STRENGTH

In general, pavement maintenance is conducted by GFK airport maintenance staff. On an annual basis, GFK maintenance staff conducts pavement maintenance that includes joint repair, spalling/crack repair, pavement markings, and any minor surface repairs that minimize Foreign Object Debris (FOD). A general contractor completes major rehabilitation/reconstruction.

A summary of the general aviation apron pavement condition with recommendations is in **Table 4-83**.

Table 4-83 – GA Apron Pavement Condition & Recommendations

Taxiway ID	Pavement Condition Index (PCI)		Action Plan (Lowest PCI)		
	Highest PCI	Lowest PCI	0-5 Years	6-10 Years	11-20 Years
Alpha Apron	96	5	Reconstruction	Major Rehab.	Maintain
Bravo Apron	91	10	Reconstruction	Maintain	Maintain
Charlie Apron	84	14	Reconstruction	Maintain	Maintain

Source: North Dakota Aeronautics Commission Pavement Condition Assessment (2015), KLJ Analysis

The south Alpha apron has adequate pavement condition in its south portion. The central portion will need major rehabilitation in the mid-term. The north portion used for IROPs and the new ARFF/SRE station is failing and needs reconstruction in the short-term. An asphalt overlay was constructed in 2013 near the U.S. Customs and Border Protection complex to serve aircraft in this area.

The Bravo and Charlie aprons are being reconstructed in phases to minimize impacts to UND's flight training operations. Post-construction PCI values should be at or near 100.

Aprons should generally be designed to accommodate the design aircraft to serve that area. At GFK these include:

- Alpha Apron: 60,000 pounds (DW) - General Aviation
- Bravo, Charlie Aprons: 12,500 pounds (SW) - Small Aircraft

The pavement strength of the GA apron pavements was calculated with results summarized in **Table 4-84**. The Alpha Apron has sufficient strength to handle the design aircraft in aircraft parking areas. The



portion used for IROPs in the old air carrier terminal has some of the strongest pavement on the airport. The portion of the Alpha Apron near Avflight FBO has a heavy aircraft pavement strength to support larger charter aircraft. Aircraft exceeding 150,000 pounds dual-wheel may occasionally use this area. The Bravo and Charlie aprons will be reconstructed in 2016 with the appropriate pavement strength.

Table 4-84 – General Aviation Pavement Strength Requirements

Pavement ID	Existing Calculated Strength	
	Capacity	PCN
Alpha Apron (Parking Apron Except FBO)	57,000 (SW)	20/R/D/W/T
	70,000 (SW)	
	118,000 (DT)	
Alpha Apron (FBO)	120,000 (SW)	65/R/B/W/T
	220,000 (DW)	
	392,000 (DT)	
Bravo Apron (Adjacent to UND)	31,000 (SW)	10/R/D/W/T
	40,500 (DW)	
	-	
Charlie Apron	28,000 (SW)	9/R/C/W/T
	37,500 (DW)	
	-	

Source: KLJ Analysis

GA Terminal Building

The size of the GA terminal building is based on the number of passengers and types of services. Although additional facilities can be provided, at a minimum the terminal building serving general aviation needs should include the following services:

- Passenger Waiting Area
- Restrooms
- Vending
- Pilots Lounge/Flight Planning
- Mechanical room
- Storage Room
- Circulation

The terminal building should be located adjacent to the transient aircraft parking apron with good visibility to the airfield, and be in close proximity to the automobile parking and waiting area. In most cases the terminal building is located within or near the Fixed Base Operator (FBO) providing aeronautical services. The terminal building at GFK is provided by AvFlight and is located on the southeast corner of the transient apron parking area. It is estimated there is 3,000 SF of terminal space usable for passengers.

The estimated planning-level size of the terminal building is based on peak hour total airport operations, 2.5 passengers per peak hour operation and 100 square feet of space per passenger as identified in [ACRP Report 113](#). These figures provide an estimate of the number of passengers to arrive, depart and generally flow through the GA terminal. Calculations are summarized in **Table 4-85**.



Table 4-85 – GA Terminal Building Size Requirements

Category	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
GA Terminal Building Size (SF)						
Peak Hour GA Operations	-	8.1	7.1	7.9	9.0	10.0
Number of Passengers	-	20.3	17.7	19.8	22.4	25.0
Total Building Size	3,000	2,035	1,767	1,983	2,241	2,499
Capacity/Deficiency	-	965	1,233	1,017	759	501

Source: KLJ Analysis

The existing GA terminal located inside the FBO sufficiently meets the existing and projected future GA itinerant passenger needs.

Landside Facilities

Terminal Curbside

The terminal building at GFK is served by one curbside area adjacent to the arrival and departure areas. There is a total of three lanes (unmarked) providing access to the terminal area for vehicle traffic, as well as two separate lanes for public transportation, taxis, and shuttles. Airport staff occasionally operate on-airport shuttles to remote parking facilities.

- Lane 1 - Direct inner curbside access next to the terminal building providing 290 LF of curb capacity, with 215 LF of covered curb frontage for personal vehicle occupancy.
- Lane 2 - Lane used for vehicle circulation. During peak hours, this lane is used as a secondary curbside area for passenger pick-up and drop offs where double parking is observed. This is typical for LOS C operational airports.
- Lane 3 - Dedicated vehicle through-lane for the inner curbside area vehicles.
- Lane 4 - Outer curbside access for commercial vehicles including taxis and shuttles with 290 LF of curb capacity.
- Lane 5 - Dedicated vehicle through lane for the outer curbside area vehicles.

There is a total of 580 LF of curb frontage available for vehicle traffic. A summary of the design-hour vehicle traffic for both personal vehicle and commercial/public transportation space is noted in **Table 4-86**. Higher vehicle dwell times are used for these calculations, including 5 minutes for each personal vehicle.

Table 4-86 – Curbside Requirements

Category	Exist.	Base	PAL 1	PAL 2	PAL 3	PAL 4
Inner Curbside						
Personal Occupancy Vehicles	-	91	91	106	120	137
Curbside Length	290	234	234	272	308	352
Outer Curbside						
Rental Car Shuttle	-	0.0	0.0	0.0	0.0	0.0
Taxis	-	9.8	11.2	11.9	13.3	15.4
Limousines	-	0.4	0.4	0.4	0.5	0.6
Hotel Shuttle	-	2.1	2.4	2.6	2.9	3.3
Airport Shuttle	-	0.7	0.8	0.9	1.0	1.1
Busses	-	0.4	0.4	0.4	0.5	0.6
Commercial/Other Vehicles	-	0.7	0.8	0.9	1.0	1.1
Curbside Length	290	68	68	78	88	102

Source: KLJ Analysis

As enplanements increase at the airport so will the number of vehicles occupying the terminal curbside. The inner curbside length at GFK is anticipated to remain adequate through PAL 2. Beyond this period additional curbside length is recommended through PAL 4 for personal vehicles to maintain



an excellent level of service. Required curbside length can be reduced to within the existing length by enforcing a lower vehicle dwell time. Through PAL 4, it is anticipated the outer curb-length will remain adequate for commercial vehicle traffic.

Automobile Parking

The automobile parking needs at a commercial service airport directly relates to the number of annual enplaned passengers. Automobile parking types include public, employee and rental car parking.

Existing baseline automobile parking supply is summarized in the **Table 4-87**. Lots A and B were constructed with the new terminal building in 2010, with Lot C “overflow” constructed in 2015 to the east of Airport Drive. There is no “short-term” parking lot. There is adequate space south of Lot C for future expansion opportunities. Calculations below assume 95 percent of the actual supply is available to the public due to maintenance, snow piling or for circulating parkers to find an available stall. The effective space count will be used for planning purposes.

Table 4-87 – Automobile Parking Supply

Parking Category	Actual Spaces	Effective Spaces (95%)
Public Parking		
Lot A	203	193
Lot B	512	486
Lot C	247	235
Total Public Parking	962	914
Employee Parking		
Employee Lot	50	47
Other	4	4
Total Employee Parking	54	51
Rental Car Parking		
Ready-Return Lot	88	84
Rental Car Storage Lot	83	79
Total Rental Car Parking	171	162
Total Parking Spaces	1,187	1,128

Source: KLJ Analysis

TERMINAL PUBLIC PARKING

Passenger terminal public parking is available in Lots A, B, and C. Lot A is the smallest of the three and is the closest to the terminal building. Vehicle traffic cannot access Lot A from Lot B for traffic flow management. Lot C is the “overflow” parking lot constructed for public-use. Lot C is used frequently during peak-season and peak operations. A total of 914 effective parking spaces is available for public-use.

Parking data from 2015 was used to determine local demand. The peak month occurred in March 2015 in which there were 667 average overnight parkers. The absolute peak experienced was 768 overnight parkers. For purposes of this analysis a peak month scenario, not a peak day. Public parking demand is calculated at 4.55 spaces for every 1,000 enplanements, with a 10 percent passenger convenience factor added. The peak month is typically experienced in March coinciding with school spring break. Estimated parking projections are depicted in **Table 4-88**.



Table 4-88 – Public Parking Requirements

Category	Base	PAL 1	PAL 2	PAL 3	PAL 4
Enplanements	146,531	147,612	170,763	194,170	220,787
Ratio per 1,000 Enplanements	4.55	4.55	4.55	4.55	4.55
Public Parking Demand	733	739	855	972	1,105
Effective Public Parking Supply	914	914	914	914	914
Capacity/Deficiency	181	175	59	(58)	(191)

Source: KLJ Analysis

Terminal public parking needs are met through PAL 2. **Once enplanements hit 185,000 annually additional public parking is forecast to be needed for the average peak month.** Individual daily peaks may also require additional parking prior to PAL 2. The parking projection exceeds the available existing parking spaces available by nearly 200 spaces in PAL 4.

From a passenger convenience perspective, parking space should be located no more than 1,000 feet from the terminal without a shuttle service to maintain an adequate LOS. All existing lots are within this distance threshold and future lots should meet this same standard. Lot C requires pedestrians to cross Airport Drive.

EMPLOYEE PARKING

Employee parking is located on the north side of the airport terminal building and has 50 spaces available. The lot is in a prime location adjacent to the terminal building. Demand was estimated based on August 2015 aerial imagery and coordination with airport staff. An additional four spaces are dedicated for parking employees. When applying an enplanement ratio as well as 10 percent contingency for peaking employee demand, employee parking space is determined to be adequate through PAL 3 as seen in **Table 4-89**.

Table 4-89 – Employee Parking Requirements

Category	Base	PAL 1	PAL 2	PAL 3	PAL 4
Employee Parking Demand	37	37	43	49	55
Effective Public Parking Supply	51	51	51	51	51
Capacity/Deficiency	14	14	8	2	(4)

Source: KLJ Analysis

It should be noted that the PAL 4 projections assume three airlines at GFK. Employee parking will likely be at capacity when a third airline begins, assuming existing new employees are needed. This is forecast to occur before PAL 4.

RENTAL CAR PARKING & FACILITIES

Rental car parking needs include ready/return lots for customers near the terminal, and long-term storage lots where the rental car fleet can be stored. Facilities with the parking areas include a quick-turn around facility for rental car companies to clean and maintain vehicles. Each of the car rental concessionaires at GFK will have slightly different facility needs. However, car rental facility requirements are evaluated cumulatively.

Ready/Return Parking

Ready/return parking needs correlates with the peak number of customer transactions rather than the total number of customers. Increased demand requires rental car staff to transport cars to/from the storage lot more frequently placing additional costs and demands on their operation. All rental car parking spaces at GFK are located immediately to the south of the terminal building. There are currently 96 parking spaces available for rental car companies to park their vehicles located immediately adjacent to in-terminal rental car facilities.

General assumptions can be made when comparing the design hour of passenger data to recommended rental vehicle demand. At GFK it is assumed 20 percent of the peak hour passengers will rent a vehicle.



A summary of existing spaces available and recommended planning activity levels is noted in **Table 4-90**.

Table 4-90 – Rental Car Ready/Return Parking Requirements

Category	Base	PAL 1	PAL 2	PAL 3	PAL 4
Peak Hour Transactions/Demand*	73	73	85	96	109
Effective Ready/Return Supply	84	84	84	84	84
Capacity/Deficiency	11	10	(1)	(12)	(25)

Source: KLJ Analysis; *Estimated

The assumptions mentioned above show a deficiency of available rental car parking space beginning in PAL 2. Actual demand may fluctuate based on passenger preference and local rental car company operations.

Rental Car Storage

The size of the rental car storage lot is directly tied to the total rental car fleet. Total fleet is directly attributed to the total number of arriving passengers requiring rental cars. Storage is typically at its highest to “ramp up” to serve peak demand periods. Some storage at GFK is accomplished off-site.

Rental car storage space is located north of the terminal building and east of the FBO. In the same parking lot as the Quick-Turn Around facility (QTA), there are approximately 79 effective storage parking spaces. When determining adequate storage/demand, a general ratio of 1.00 spaces per 1,000 annual enplanements was applied as shown in **Table 4-91**.

Table 4-91 – Rental Car Storage Parking Requirements

Category	Base	PAL 1	PAL 2	PAL 3	PAL 4
Typical Rental Car Storage Demand	147	148	171	194	221
Effective Rental Car Storage Supply	79	79	79	79	79
Capacity/Deficiency	(68)	(69)	(92)	(115)	(142)

Source: KLJ Analysis

As indicated, there is calculated to be an existing deficit in available on-airport car storage demand for the number of passengers utilizing GFK. Actual demand depends on local rental car company operations. Additional parking spaces should be planned. By PAL 4, an additional 142 spaces are estimated to be necessary.

Quick Turn Around (QTA) Facility

A facility to accommodate rental car operations is a maintenance or “quick-turn around” facility. These facilities are located within the vicinity of rental car operations and parking. A typical rental car QTA consists of a car wash, maintenance bays, storage and fueling area. The existing rental car QTA is located within the rental car storage parking area.

The QTA facility at GFK consists of three service bays and one car wash bay. There is minimal storage or office space. Fuel is available from the GFK fuel farm. The existing QTA facility is approximately 4,000 SF in size and is operated by the local rental car agencies.

New rental QTA installations at other comparable airports were evaluated. Each airport’s QTA needs were evaluated based on rental car revenue as reported to the FAA. Based on this evaluation, a QTF size planning factor of \$170 per SF was used accounting for facility sizing based on current and projected facility needs. Rental car revenue at GFK is projected to increase at the same rate as enplanements. Using these factors, a projected QTA facility size was determined. Calculations are summarized in **Table 4-92**.



Exhibit 4-92 – Rental Car QTA Facility Requirements

Category	Base	PAL 1	PAL 2	PAL 3	PAL 4
Rental Car Revenue	\$398,868	\$401,811	\$464,829	\$528,545	\$600,998
Revenue per QTA SF Factor	170	170	170	170	170
QTA Building Size	2,346	2,364	2,734	3,109	3,535
Existing QTF Building	4,000	4,000	4,000	4,000	4,000
Capacity/Deficiency	1,654	1,636	1,266	891	465

Source: KLJ Analysis

The existing QTA facility is anticipated to cover the airport needs beyond the planning period. Actual demand depends on local rental car company operations. If a new rental car provider establishes operations at GFK then needs may change.

Ground Access & Circulation

AIRPORT ACCESS ROAD


Airport Drive provides vehicular access to the airport connecting from to east/west Gateway Drive (U.S. Highway 2). Airport Drive provides landside access to every facility on the airfield and terminates at the ARFF/SRE complex. There is a roundabout on the southern-portion of the passenger terminal area eliminate left-turning movements from vehicles returning to the terminal. There is adequate access to the terminal, many opportunities to access parking and to return to the terminal. Airport Drive was reconstructed and reconfigured near the passenger terminal in 2010.

Airport Drive and associated public parking lot center access aisles need pavement reconstruction north of the passenger terminal. An ultimate consideration would be to realign Airport Drive around the terminal parking lots to eliminate pedestrian crossings and provide additional parking opportunities. Constructing islands would help improve traffic flow and circulation at the north terminal intersection. An additional improvement would be a cell-phone waiting lot to allow personal vehicles (or ride-sharing operators) to queue to eliminate wait times in front of the terminal.

ROADWAY SYSTEM CONSIDERATIONS

Surrounding roadways provide adequate access for customers to and from the airport. Roadway plans can also influence airport development. U.S. Highway 2 provides the primary access from Airport Drive. This roadway provides direct connection to the Grand Forks central business district (five miles southeast). The airport is located near Interstate 29, approximately four miles east of the airport.

The North Dakota Department of Transportation completed a roadway realignment study at the intersection of Airport Road/County Highway 5 and Gateway Drive/U.S. Highway 2. The intersection has a history of vehicle accidents, and has been noted as one of the most dangerous intersections statewide. Safety improvements are necessary. The study proposes an implementation plan with a “Staggered T Intersection Crossing” intersection, which would eliminate the existing signalized intersection. This would require the shift of Airport Drive within airport property to the east as it meets U.S. Highway 2. The report cites the Airport Authority’s desire to maintain direct access between Airport

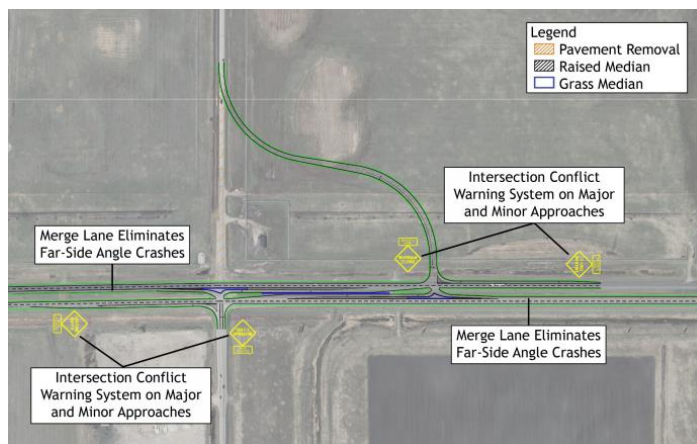

Staggered T-Intersection @ Airport Drive
(U.S. Highway 2 Corridor Study)



Drive and County Highway 5. As of the date of this Master Plan study, no alignment options have officially been adopted for implementation.

PUBLIC TRANSPORTATION

Public transportation is currently not provided on a regular basis out to the airport. Local hotels do occasionally provide shuttle service to and from the airport. Local taxi services also serve the airport and provide connectivity to the community. Due to the airport's geographical location outside the limits of major city amenities, the airport is 3 miles away from the nearest bus station. U.S. Highway 2 is not accessible by pedestrian traffic. Ride-share services such as Uber or Lyft do not currently serve Grand Forks.

Support Facilities

Support facilities are necessary to support a safe and efficiently run airport supporting airport operations and the travelling public.

Fueling Facilities

GFK features an airport-owned fuel farm located in the middle of the terminal area on the west side of airport drive. The fuel farm includes eight above-ground fuel tanks and pumps capable of providing service on both the landside (Auto and Diesel) and airside (100LL and Jet-A) portions of the airport. The fuel farm has three AVGAS 100LL, three Jet-A, one auto, and one diesel tanks. AvFlight FBO and UND provides fuel services to aircraft via fuel trucks. **Table 4-93** summarizes the fuel storage needs.

Table 4-93 – Fuel Storage Requirements

Category	Existing	Base	PAL 1	PAL 2	PAL 3	PAL 4
100LL Fuel Storage (Gallons)						
Annual Piston Operations	-	290,457	287,079	307,034	318,392	320,176
Annual 100LL Gallons	-	624,026	616,769	659,640	684,042	687,877
Capacity (Days)	-	35.09	35.51	33.20	32.02	31.84
Load Frequency (Days)	-	5.85	5.92	5.53	5.34	5.31
Recom'd 100LL Tank Size	60,000	60,000	60,000	60,000	60,000	60,000
Capacity/Deficiency	-	0	0	0	0	0
JET-A Fuel Storage (Gallons)						
Annual Turbine Operations	-	33,739	25,533	27,170	28,938	30,300
Annual JET-A Gallons	-	3,135,867	2,373,159	2,525,373	2,689,634	2,816,264
Capacity (Days)	-	6.98	9.23	8.67	8.14	7.78
Load Frequency (Days)	-	1.16	1.54	1.45	1.36	1.30
Recom'd JET-A Tank Size	60,000	60,000	60,000	60,000	60,000	60,000
Capacity/Deficiency*	-	(305)	14,362	11,435	8,276	5,841

Source: KLJ Analysis

Each fuel farm should provide capacity to utilize a full 10,000-gallon fuel delivery tanker truck and have at least a 7-day capacity. This is met at GFK. Overall 100LL fuel demand is forecast to increase 10 percent through PAL 4, while Jet-A fuel demand is projected to decrease.

The 100LL fuel tank capacity of 60,000 gallons in three 20,000 tanks is adequate through the planning period. The tanks currently have capacity to meet demand for approximately 30 days and require a tanker load once every 5 days to keep up with historical consumption rates.

The Jet-A fuel tank capacity of 60,000 gallons in three 20,000 tanks should be increased through the planning period. The tanks only have capacity to meet airport demand for approximately 7 days and require a tanker load once every day or so to keep up with historical consumption rates. If there was a shortage to the fuel supply of more than a few days, then available fuel would become a concern. The FBO and the airlines rely on the GFK fuel farm for fueling operations.



Fuel usage projections are based on operations. As average aircraft size becomes larger, an increased consumption rate may be encountered. An additional Jet-A tank is recommended if annual consumption continues to increase beyond existing levels.

Fuel tank capacity and service is adequate for auto gas and diesel well into the future. There is no future need to expand this self-serve fuel area.

No self-serve fuel pumps are available for aircraft today. All fuel services are provided by the FBO or UND via fuel trucks. A new self-serve fuel facility is recommended when the east-general aviation facilities are constructed. This will help alleviate the time it would take for aircraft to taxi to the FBO, or a fuel truck to drive across the airfield to serve an aircraft. GFK already offers 24/7 self-serve auto and diesel fuel pumps.

Aircraft Rescue and Fire Fighting (ARFF)

As a certificated FAR Part 139 facility, GFK must comply with ARFF equipment, staffing, training, and operational requirements. The Grand Forks Regional Airport Authority owns and operates the ARFF facility east of Taxiway A in the northwest corner of airport facilities. This facility is 14,000 SF and opened in 2015. Its operation meets all FAA requirements.

Minimum ARFF requirements are driven by the length of the largest air carrier aircraft that serves the airport with an average of five or more daily departures (see **Table 4-94**). If the largest aircraft does not operate five times per day, the next smaller category of ARFF index is used. GFK is currently classified as an ARFF Index B facility (A320 or similar-lengthened aircraft). Future anticipated operations are anticipated to remain with an Airbus A320 (123.3' length) or similar aircraft. The ARFF index is not anticipated to change into the future. If Index C is required, the existing equipment has adequate water and commensurate quantity of Aqueous Film Forming Foam (AFFF) to accommodate Index C operations. Based on FAA Program Guidance Letter 17-01, GFK appears to be eligible for FAA funding of Index C equipment as there was more than 25 annual operations of Index C aircraft in 2016.

Table 4-94 – ARFF Index Requirements

ARFF Index	Aircraft Length	Representative Aircraft
A	< 90 feet	CRJ-200
B	90 feet - < 126 feet	CRJ-900, A-320, ERJ-145
C	126 feet - < 159 feet	B-737-800, B-757, MD-80
D	159 feet - < 200 feet	B-767, A-300
E	> 200 feet	B-747

Source: [Title 14 CFR Part 139](#)

The ARFF station must be located so that at least one firefighting vehicles can reach the midpoint of the farthest commercial service runway within three minutes. The current ARFF site meets this requirement. This location is anticipated to be sufficient to meet the needs into the future.

Airport Maintenance & Snow Removal Equipment

GFK's maintenance and SRE facility was recently constructed and opened in 2014. The maintenance/SRE facility is 21,800 SF and has 15 equipment bays, a driving lane, shop, sand, and deicing storage. This facility houses 26 pieces of equipment and attachments for snow removal, deicing, grass cutting, pavement maintenance, and airport operations.

When determining accurate analysis on whether an airport has adequate SRE support/size. Several factors are considered per [AC 150/5220-18A Buildings for Storage and Maintenance of Airport Snow and Control Equipment and Vehicles](#). Airports are categorized by size given the amount of runway surface area that must be cleared.

- **Small Airport** - Less than 420,000 SF
- **Medium Airport** - At least 420,000 SF but less than 700,000 SF



- **Large Airport** - At least 700,000 SF but less than 1,000,000 SF
- **Very Large Airport** - At least 1,000,000 SF

Based on the categories above, GFK is categorized as a “Very Large Airport”. There is over 1.1 million SF of pavement surface to clear when only considering Runway 17R-35L. It should be noted that GFK airport maintenance staff closes all other runway surfaces during significant snow accumulations. GFK’s SRE facility has the “Center-aisle Design” allowing SRE vehicles access to all parking stalls from one central location.

Airport management notes that there is insufficient space in the current SRE building to accommodate future needs. If the airport were to acquire a second runway broom then other equipment would need to be relocated to another building. Expansion of the existing structure should be planned to meet PAL 4 needs.

Customs and Border Protection (CBP)

The existing Customs and Border Protection (CBP) facility is attached to the old ARFF/Operations facility. The facility is approximately 40 years old and needs replacement. Approximately 1,700 SF in size, the CBP facility has dedicated office space and a lockable detaining area for passenger processing. Per discussions with CBP staff, the GFK facility is currently capable of processing 10 passengers per flight and is classified as a General Aviation Facility (GAF). Processing passengers at GFK is limited unless extra staff travels to GFK.

The existing building is within a previously identified GA development area. Discussions have started between GFK and CBP on a long-term solution to adequately provide passenger processing services. This could include but would not be limited to a facility connected to the air carrier terminal building, or a stand-alone CBP building adjacent to a dedicated apron area. Discussions have also surrounded the possibility of a Federal Inspection Service (FIS) facility on the airfield to process charter flights. The type of CBP facility and geographic locations on the airfield should be explored in the Alternatives section. A summary of general space requirements for CBP facilities are noted in **Table 4-95**.

Table 4-95 – Customs and Border Protection (CBP) Space Requirements

Area Type	Square Feet Required
General Aviation Facility (GAF)	
Passenger Waiting and Processing	2,160
CBP General Office	225
Computer/Communications Room	60
Storage Room	60
Search/Hold Room	80
Interview Room	80
Agricultural Quarantine Inspection (AQI) Laboratory	110
Public Restrooms	112
TOTAL	2,892
Small Airport Facility (200 passengers/hour)	
Primary Processing	3,370
Secondary Processing	3,460
CBP Administration	1,310
General Aviation Facilities	2,900
TOTAL	11,040

Source: [*Airport Technical Design Standards for Passenger Processing Facilities \(USCBP, 2006\)*](#)

Based on the noted table above, GFK’s existing CBP facility has inadequate passenger waiting and processing space to meet GAF requirements today. FIS facilities are an optional improvement. Should the airport desire FIS facilities to clear larger air carrier aircraft, CBP facility size and layout would require substantial new infrastructure. A new GAF CBP facility is recommended at a minimum to continue to clear smaller international flights.



Security, Access & Wildlife

SECURITY & FENCING

Security is an important consideration when operating a safe airport. When operating on the apron/sterile side of the terminal, personnel badging requirements are known as Security Identification Display Areas (SIDA). The SIDA area is denoted by red lines on terminal and air cargo apron pavement. There are various secure access points around the terminal complex and are adequate to meet TSA standards.

The first line of security protection infrastructure is a perimeter fence. Its installation will help prevent unauthorized persons from entering the airfield and to control wildlife. TSA recommends a minimum 6-foot high fence with added barbed wire and upgraded FAA standards recommended to control wildlife. At GFK the chain-link perimeter fence is 10-feet high to meet security and wildlife standards. This is recommended to be maintained. All access points are controlled. Gates are controlled electronically all around the terminal building area. On the exterior perimeter, all gates are chained and locked.

INTERNAL AIRFIELD CIRCULATION

FAA generally recommends airports have or plan for a full internal access road system that allows authorized vehicles to access various portions of the airfield, minimizing the need to receive ATCT clearances to navigate on active taxiways or cross active runways to access portions of airport property. A typical internal airfield perimeter road is a minimum 15 feet wide and located outside of the airfield safety areas such as the Runway Object Free Areas. GFK does not have a full internal airfield circulation road network. A series of internal roadways to access NAVAIDS and other areas are accessible from taxiways and adjacent public roadways. A full airport perimeter inspection cannot be achieved purely by road.

Planning for a full internal airfield circulation road outside of Runway Object Free Areas recommended. A dedicated access road would allow airport staff to access the entirety of the airfield without use of public roads and would eliminate or reduce the need to cross active runways.

WILDLIFE CONTROL & MITIGATION

Controlling wildlife on or near the airport helps mitigate existing and prevent the creation of potential new hazards to aircraft. The airport can take steps to help create a safer environment for aircraft operations. The 2014 Wildlife Hazard Assessment (WHA) is current. The existing 10-foot high chain-link perimeter fence is in excellent condition but does allow some small mammals to access the airfield by crawling under the fence. A bottom apron is recommended. A Wildlife Hazard Mitigation Plan (WHMP) is in-place and are enforced by the ARFF/Operations staff.

The Grand Forks water treatment lagoons is the single most dangerous hazard to aircraft per the WHA, which is located as close as 2,700 feet to GFK. This type of wildlife attractant should be no less than 10,000 feet according to [FAA AC 150/5200-33B, Hazardous Wildlife Attractants On or Near Airports](#). In the future mitigation measures, may have to be put into place prior to constructing significant airport improvements. It is recommended the WHA/WHMP be updated regularly through the planning cycle and beyond.

Airport Utilities

On-airport utilities including water, sanitary sewer, storm sewer, gas, power and communications are discussed in this section. Future facility development may require the relocation, replacement and/or upgrading of portions of the airport utility infrastructure. A brief discussion of special considerations is below.

WATER

Fire suppressant systems may be required in all aircraft hangars depending on the local adopted building code standards. As such, any future hangar development would require adequate water supply



and fire suppressant system. Water access should be considered and any necessary improvements should be made to accommodate additional hangar construction on the airfield on an as-required basis. It is recommended the existing water boost station located on the northeast corner of Airport Drive and Gateway Drive be evaluated for capacity and ensure it can handle additional infrastructure.

SANITARY SEWER

It is recommended the City of Grand Forks continue to provide sanitary services to the airport. Older T-hangars identified on the west-side of the airfield to be removed, currently do not have connected sanitary sewer. As such, any reconstruction of the area with new hangar development should plan for additional costs associated with adding this utility to the area.

STORM SEWER

Storm sewer at GFK, in general, flows north from the north airfield area, west from the central area, and east from the southern area into the English Coulee Diversion channel and east of Runway 27L. The north drainage area has been known to see high-water during spring/melting months. Drainage improvements should be considered in the event building/pavement improvements are made near the UND parking lot area or along the north Bravo Apron Area. Considerations should also be made for the melting of airport snow stockpiling areas.

GAS, POWER & COMMUNICATIONS

The airport has two vault locations; one of them located in the old SRE building and one near the corner of Runway 17L/35R and Runway 9R/27L. The vault building in the old SRE building is tied to most infrastructure on the west-side of the airfield. Runway 17R/35L's lighting system is in-need of a complete reconstruction. Ideally the vault should be located elsewhere on the airfield, like the configuration on the east side of the airfield. This would allow for complete demolition of the old SRE building removing restrictions for re-development in the area.

An underground fuel pipeline runs east-west through airport property to serve the Grand Forks Air Force Base. This fuel line has an existing 20-foot easement associated with it. Future development plans near this area should be negotiated/coordinated with the owner of the fuel pipeline.

Other

Other Aeronautical/Non-Aeronautical Development

Other aeronautical development includes aviation-related businesses. Examples include aircraft maintenance, repair, and overhaul (MRO) facilities or other businesses that require direct access to the airfield. Considerations for developing property for these uses include adequate airfield access, parcel size, landside roadway access/parking and utilities. This type of development should be protected if sufficient available land exists. GFK desires to preserve land with airfield access for flexible, unique aeronautical development.

Airports should primarily be reserved for existing and planned aeronautical uses, however, non-aeronautical uses can enhance the customer experience and provide additional revenue-generation opportunities to the airport. If airport owned land does not have any aeronautical need for the safety, capacity or other airport development needs then it can be considered for a non-aeronautical use. Non-aeronautical development requires a concurrent land use or land release with approval from the FAA. GFK has expressed interest in preserving compatible land for non-aeronautical use. There are no existing non-aeronautical land uses at GFK.

Land at GFK is part of a designated Foreign Trade Zone (FTZ). An FTZ is a designated site under CBP supervision that is considered outside of CBP. Foreign and domestic merchandise may be admitted into an FTZ duty-free without formal CBP entry procedures. Goods are considered international commerce and can be assembled, manufactured, or processed and re-exported without paying duties. Common activities include warehousing/distribution and manufacturing. This provides GFK with economic



development opportunities. In May 2016, an Alternative Site Framework (ASF) was approved to cover the entire service area of Grand Forks County. Previously only 6 acres at GFK was a designated FTZ. The ASF classification provides an option for individual FTZ “usage driven” subzones to be established to provide greater flexibility for operators/users.

There are no specific recommendations for non-aeronautical use in this Master Plan, however the airport should continue to explore and market opportunities in areas not needed for aeronautical use. Non-aeronautical development areas must be shown on the ALP and approved by FAA.

Summary

This chapter identifies safety, capacity and development needs for the Grand Forks International Airport based on forecasted activity levels. These recommendations provide the basis for formulating development alternatives in **Chapter 5: Alternatives Analysis** to adequately address recommended improvements. The following list summarizes the facility recommendations. **Figure 4-1** graphically depicts key facility needs.

Airside Facilities

- Overall critical design aircraft is expected to evolve from an ARC D-IV, TDG-5 airplane to an ARC C-III, TDG-3 airplane in the future.
- Recommended future primary Runway 17R-35L length is 7,500 feet with a pavement strength of 172,000 pounds (ACN: 51) to accommodate C-III aircraft (Airbus A320). Plan for a major rehabilitation or reconstruction in the next 6-10 years. Preserve for an ultimate runway extension to 8,000 feet.
- Recommended future crosswind Runway 9L-27R dimensions is 6,700' x 150' to accommodate air carrier service in C-III aircraft to mitigate converging traffic. Runway strengthening will also be needed.
- Approach procedure enhancements are recommended to be explored for Runway 35L, 17R and 9L to achieve lowest practical weather minimums to increase airport utility. Instrument approaches are recommended for Runway 17L-35R to serve small GA and training aircraft.
- Total airfield is estimated at 82% of total practical operational capacity in 2014, growing to over 89% by PAL 4. The base design hour operations exceed the calculated hourly capacity of airport flow patterns. Traffic pattern delays are up to 5.5 minutes per aircraft. Infrastructure and operational capacity enhancements are recommended.
- Acquire land use control over the remaining Runway 27L RPZ to maintain land use compatibility. Enact a multi-jurisdictional airport land use compatibility/safety zoning ordinance.
- Recommended air carrier taxiway width is 50 feet for TDG-3 airplanes where 75 feet is the existing standard for TDG-5 airplanes. Taxiway A should be strengthened to accommodate the design aircraft.
- To improve capacity and operational flow, installing holding bays at each runway end is recommended.

Passenger Terminal Facilities

- An upgraded gate to accommodate narrowbody aircraft with a dedicated third passenger boarding bridge is recommended in PAL 1 for irregular operations.
- Additional dedicated airline office space and baggage office should be reserved for long-term needs.
- Additional baggage screening area is recommended to be preserved to meet peak screening needs in PAL 2 and beyond. Additional baggage make-up facility carousel frontage is recommended to accommodate existing demand.



- By PAL 3, additional space should be reserved to accommodate up to three security screening lanes to maintain low passenger queue times.
- Total passenger holdroom seating area exceeds capacity today and should be expanded to accommodate two gates in use at one time. Circulation corridor width in the concourse is not adequate and should be expanded. Total space should be expanded by PAL 3 to accommodate up to three gates in use at one time. The ticketing area and employee parking lot should also be expanded at that time.
- Total baggage claim frontage to accommodate an Airbus A320 should be expanded to meet peak aircraft existing needs.
- Terminal aircraft parking apron has inadequate depth to meet existing needs. Additional width is needed now. A dedicated de-icing/overnight parking apron and second access point is also recommended to minimize delays.

Air Cargo Facilities

- With FedEx's moving their regional hub from GFK, air cargo space meets the remaining local air cargo needs now.
- Consolidation of air cargo activities on the airport to the dedicated air cargo area is recommended.

General Aviation Facilities

- An additional 99,000 square feet of aircraft storage space (24 percent) should be planned to meet PAL 4 forecasted based aircraft and fleet mix demand.
- Per the 2014 Building Area Study, develop the west GA area for larger/corporate aircraft and the east GA area for smaller aircraft.
- Transient aircraft storage should increase by nearly 50 percent to 39,000 square feet to accommodate transient aircraft types who may desire hangar storage.
- Transient apron space needs to be reconfigured and expanded to accommodate UND and non-UND parked aircraft demand through PAL 4.

Landside Facilities

- Total inner terminal curbside length should be sufficient to accommodate personal vehicle demand if a reduced vehicle dwell time is enforced.
- Total public parking supply is projected to meet demand through PAL 2, with an additional 200 spaces needed to meet average peak month demand by PAL 4. Individual peaks may exceed supply before PAL 2.
- Additional rental car ready/return spaces are projected to be needed by PAL 2. There is currently a deficiency in on-site rental car storage parking to meet demand.
- Additional employee parking spaces may be needed by PAL 3.

Support & Other Facilities

- Additional Jet-A fuel tank capacity is needed now to provide a minimum of 7 days of supply.
- A new Customs and Border Protection (CBP) facility to General Aviation Facility (GAF) standards is recommended.
- A full internal airfield access road outside of all Object Free Areas (OFA) is recommended.
- Relocate the west airfield electrical vault if cost-effective.
- Protect the Foreign Trade Zone (FTZ) and explore compatible non-aeronautical land uses on-airport to support economic development.